

## GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs.

As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



## TECHNICAL SPECIFICATIONS

AISI 304 work surface and dashboard.

"Thermoblock" heating elements: heating elements. armored included in an aluminum casting with high heat resistance.

Equipped with programmable automatic water loading.

Can be used in 7 functionalities: fry top / BRATT PAN / pasta cooker / slow cooker / steaming / kettle / bain-marie.

Double-walled lid without perimeter seal.

Two USB outputs located under the dashboard (compartment area) for storing recipes and updating software.

Control of the firings by means of a probe at the core.

Gastronorm-sized tub.

Thanks to the jet-proofing certification obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

CODICE  
CR1014739MODELLO  
Q70MA/E800SERIE  
QUEEN 7

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1014739
DEFINITION	Q70MA/E800 MULTI COOKER EL.TALENT BARON
COMMERCIAL LINE	DIAMANTE
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	870 mm
NET WEIGHT	0 Kg
VOLUME (net)	0,244
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,009 m3
GROSS PACKING WEIGHT	0 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	10,000 kW
IP GRADE	IPX4


TALENT SLIM L 800

CODICE CR1014739	MODELLO Q70MA/E800	SERIE QUEEN 7
---------------------	-----------------------	------------------

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

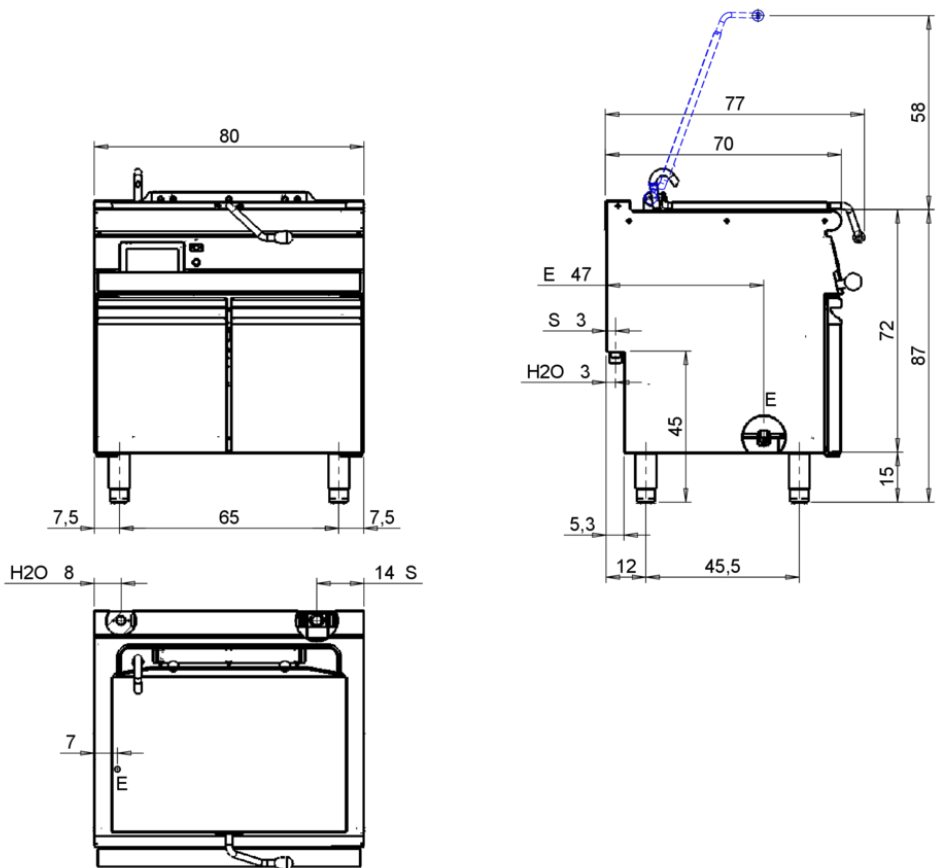

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
<b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
<b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água UNI EN 10226-1 R 1"	<b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
<b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	<b>A1</b> = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno <b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio <b>EN ISO 228-1 G3/4</b>
<b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresi3n - Onderdrukklep - Válvula de depress3o	<b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
<b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	
<b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulaç3o de dreno	

# PRODUCT'S RANGE PLUS



Basin for draining the cooked product into the tank. Guaranteed cleanliness of the station and ease in transporting products.




Control of cooking by core probe.



Automatic water filling with the possibility of programming litres.



Mains water drain with overflow drain and basin drain hole with sealing plug.



Easy to understand and use Touch Screen control panel. Possibility of storing personal recipes.

## TALENT SLIM L 800

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1014739**

MODELLO  
**Q70MA/E800**

SERIE  
**QUEEN 7**

### ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1200179	<b>CAMCF</b>	Lid for steamer use
CR1200169	<b>GFMCF</b>	Tank bottom grid
CR1200159	<b>CPC1/3MCF</b>	GN1/3 basket for pasta cooker
CR1200119	<b>TSCMCF</b>	Frame for slow cooking
CR0956330	<b>SDXP</b>	Shovel
CR0999069	<b>CRLMCF</b>	Trolley for multifunctional
CR1200149	<b>CV1/3MCP</b>	GN1/3 steamer basket 160x280x115(H)cm
CR0985539	<b>ZL70</b>	700 SERIES SIDE PLINTH