

GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



TECHNICAL SPECIFICATIONS

Glass and dishwashers, ideal for bars, pubs, restaurants and hotels. These front-loading undercounter machines, with an attractive design thanks to the renewed electromechanical control panel, offer a large loading capacity, guaranteeing maximum performance at an affordable price. The many optional extras available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs. The many options available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs.

New electronic versions available in the T models with LED control panel that offers the display of washing and rinsing temperatures, the selected programme, working status and main alarm codes. They also offer 4 standard washing programmes that adapt the machine's performance individually to the type of dishes to be washed.

Moulded and sloping basin for perfect emptying

Lightweight composite impellers, efficient even at low mains pressure

ECO WASH PLUS T - BPEW50TDA

Project
Rev.:
Zone:
Location:



CODICE
BND212017

MODELLO
BPEW50TDA

SERIE
WASHING

Technical Information

SPECIFICATION	DATA
MATERIAL	BND212017
DEFINITION	BPEW50TDA LAVAST. ELET. 500
DIM. WIDTH	590 mm
DIM. PRODUCTIVITY	600 mm
DIM. HEIGHT	850 mm
NET WEIGHT	56.5 Kg
VOLUME (net)	0.301
PACKAGE LENGTH	660 mm
PACKAGE WIDTH	660 mm
PACKAGING HEIGHT	1010 mm
PACKAGE VOLUME	0,440 m3
GROSS PACKING WEIGHT	65 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	5.2 kW
BASKET SIZE	500x500 mm
WASH CYCLES	60/90/120/180 sec
WASH PUMP	650W
WATER CONSUMPTION	2,3 lt

ECO WASH PLUS T - BPEW50TDA


Project
Rev.:
Zone:
Location:



CODICE
BND212017

MODELLO
BPEW50TDA

SERIE
WASHING

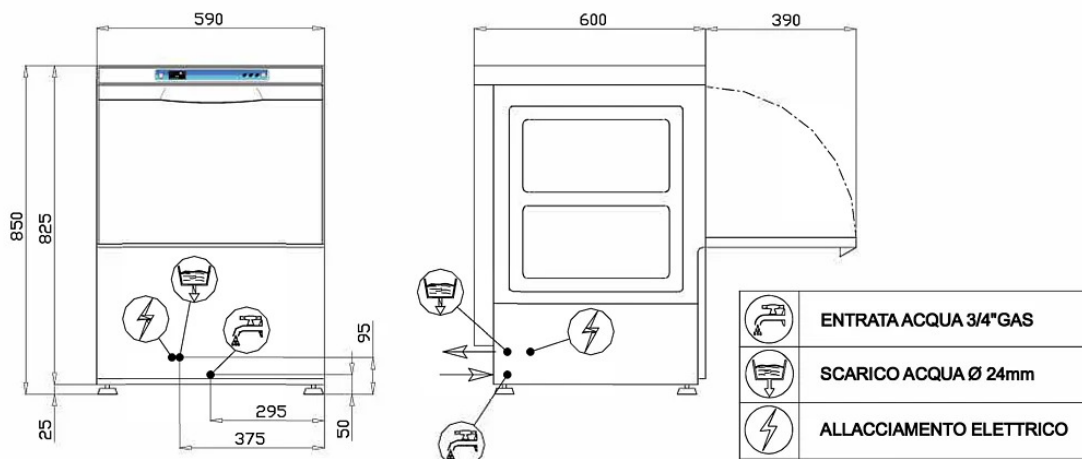

DATI TECNICI	STANDARD				
DIMENSIONI ESTERNE					
larghezza	590 mm				
profondita'	600 mm				
altezza(piedino avvitato)	850 mm				
PESO NETTO (versione base)	56,5 kg				
TENSIONE DI ALIMENTAZIONE	400V 3N 50Hz				
POTENZA MASSIMA ASSORBITA	5150 W				
DUREZZA ACQUA	2-8 °F				
PRESSIONE ACQUA ALIMENTAZIONE	200-400 kPa				
ALTEZZA UTILE & CESTI					
diametro piatti	345 mm				
altezza bicchieri	320 mm				
DIMENSIONE CESTI	500X500 mm				
DOTAZIONE CESTI	1XC40 - 1XC44 - 1X15060				
N° CICLI (sec)	1(60)	2(90)	3(120)	4(180)	----
ALIMENTAZIONE ACQUA 55°C					
produzione cesti(*) ⁽¹⁾ Cesti/h	60	40	30	20	--
ALIMENTAZIONE ACQUA 10°C					
produzione cesti(*) ⁽¹⁾ Cesti/h	20	20	20	20	--
CONSUMO ACQUA PER CICLO (pressione idrica 200kPa)	2.3 L				
CAPACITA' BOILER	5.7 L				
RESISTENZA BOILER	4500 W				
SET. TEMPERATURA RISCIAQUO	85°C				
CAPACITA' VASCA	29 L				
RESISTENZA VASCA	2700 W				
SET. TEMPERATURA VASCA	55°C				
POTENZA POMPA	650 W (340 L/min***)				
pompa scarico (optional)	25 W h MAX scarico 0.8m (40 L/min***)				
RUMOROSITA'	63 dB(A)				

(*) CON THERMOSTOP DI SERIE

(***) PORTATA MASSIMA

(1) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1


PRODUCT'S RANGE PLUS



Double-walled door



Moulded and sloping basin for
perfect emptying



Lightweight composite impellers,
efficient even at low mains pressure

ECO WASH PLUS T - BPEW50TDA

Project
Rev.:
Zone:
Location:



CODICE
BND212017

MODELLO
BPEW50TDA

SERIE
WASHING

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
EWPS	EWPS	DRAIN PUMP
EWDE	EWDE	DETERGENT DISPENSER