

# ELECTRIC SALAMANDER WITH MOVABLE RADIANT PLATE - THREE-PHASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0957139

MODELLO  
SDSM7E

SERIE  
SERIE 600

## GENERAL CHARACTERISTICS

A line of small-sized cooking equipment designed for those who, even in small spaces, do not want to give up great performance. Made of AISI 304 18/10 stainless steel, finely finished with Scotch Brite satin finish, it has rounded edges and large capacity enclosures; it has 600/650 mm depth and modular width of 400/600/700/800/1000 mm; the series is completed by open, armored or refrigerated base supports.

The equipment is easily modular to one another until it forms a compact, gap-free whole thanks to a leak-covering profile that provides protection against leakage and thus maximum hygiene. High chimneys, ergonomic knobs mounted on a sloping dashboard for easy visibility, give the range ease of use from the first approach.

All models are CE approved.



## TECHNICAL SPECIFICATIONS

Electric salamander made of Aisi 304 stainless steel.

Ideal for finishing dishes, gratinating or reheating food.

Heating element movable in height from 115 to 220 mm.

Tray with flat presence sensor.

Control panel for setting the mode of use in cooking or holding, time and temperature adjustment with digital display.

Storage of programs and firing cycles.

Heating system with 3 heating elements activated in total or partial operation.

Resistors housed within a ceramic reflective dish, protected by a diffuser glass.

Baking temperature of 230 °C , holding from 40 °C.

# ELECTRIC SALAMANDER WITH MOVABLE RADIANT PLATE - THREE-PHASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR0957139

MODELLO  
SDSM7E

SERIE  
SERIE 600

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR0957139
DEFINITION	SALAMANDRA HIPER M70 ELETTR. SDSM7E
SUPPLY	ELECTRICS
DIM. WIDTH	755 mm
DIM. PRODUCTIVITY	540 mm
DIM. HEIGHT	500 mm
NET WEIGHT	82 Kg
PACKAGE LENGTH	780 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	710 mm
PACKAGE VOLUME	0,471 m3
GROSS PACKING WEIGHT	93 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	6 kW
IP GRADE	IPX3
CERTIFIED MODEL	SDSM7E

ELECTRIC SALAMANDER WITH MOVABLE RADIANT  
PLATE - THREE-PHASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR0957139

MODELLO  
SDSM7E

SERIE  
SERIE 600

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -  
ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

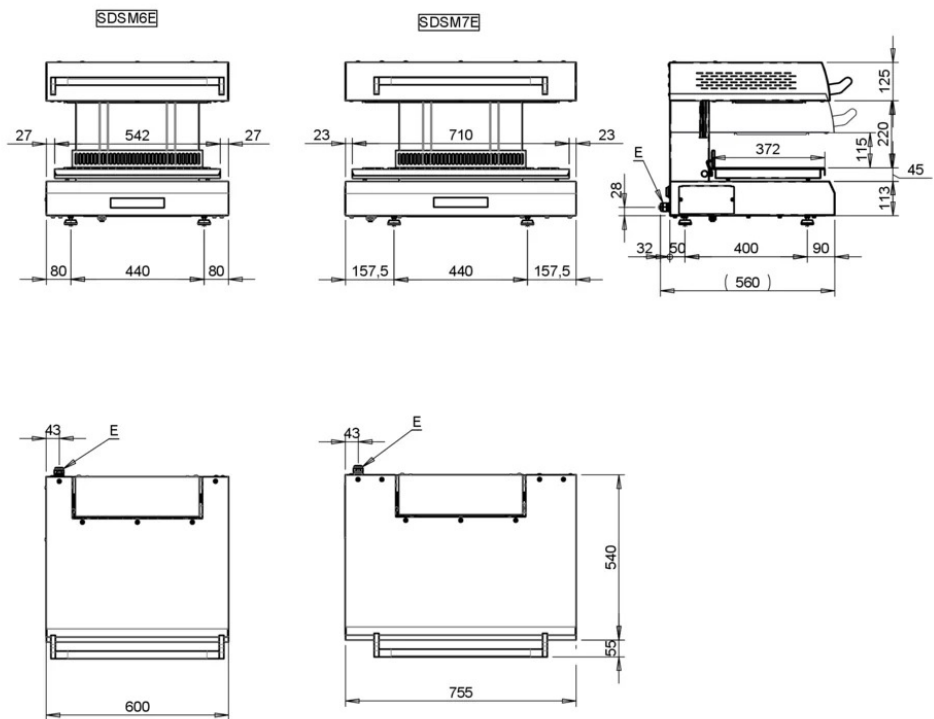

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupe de cable el Pisacable - Elektrische kabelwartel