

ELECTRIC MULTIFUNCTION BRATT PAN

Project
Rev.:
Zone:
Location:



CODICE
CR1018129

MODELLO
Q90BRF/E605

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Fixed basin completely made of steel.
Resistances placed under the bottom.
Adjustable temperature from 50 to 300°C.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC MULTIFUNCTION BRATT PAN

Project
Rev.:
Zone:
Location:



CODICE
CR1018129

MODELLO
Q90BRF/E605

SERIE
QUEEN 9

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1018129
DEFINITION	Q90BRF/E605 MULTIPLA EL.M60
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	60 Kg
VOLUME (net)	0.47
PACKAGE LENGTH	0 mm
PACKAGE WIDTH	0 mm
PACKAGING HEIGHT	0 mm
PACKAGE VOLUME	0,000 m3
GROSS PACKING WEIGHT	82 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	8.1 kW
IP GRADE	IPX5
CAPACITY	21
CERTIFIED MODEL	Q90BRF/E605

ELECTRIC MULTIFUNCTION BRATT PAN

Project
Rev.:
Zone:
Location:




CODICE
CR1018129

MODELLO
Q90BRF/E605

SERIE
QUEEN 9

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

Q90BRF/E605

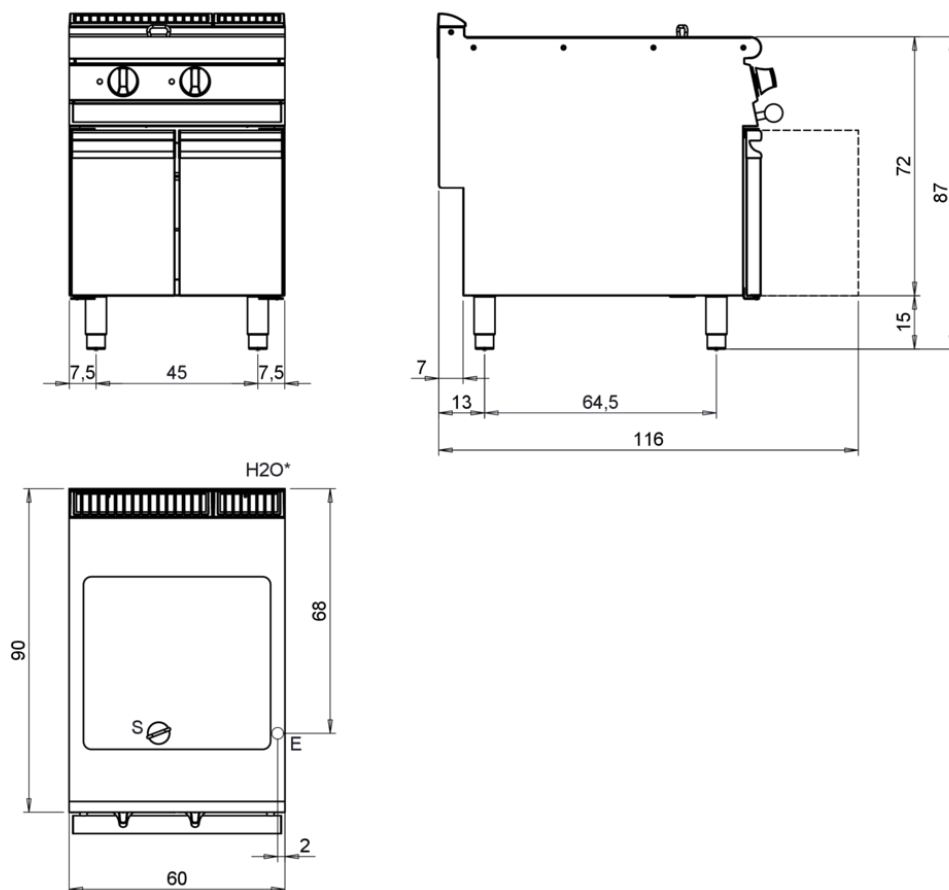

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão	A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno		

ELECTRIC MULTIFUNCTION BRATT PAN

Project
Rev.:
Zone:
Location:



CODICE
CR1018129

MODELLO
Q90BRF/E605

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Tank with armored heating elements placed under the bottom to cook with temperature uniformity.