

# GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON OPEN BASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1013189

MODELLO  
Q70TPMV/G8003SX

SERIE  
QUEEN 7

## GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs. As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



# GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON OPEN BASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1013189

MODELLO  
Q70TPMV/G8003SX

SERIE  
QUEEN 7

## TECHNICAL SPECIFICATIONS

Polished cast iron plate with removable central disk.  
High-power (12 kW) central burner with piezo ignition.  
Differentiated thermal zones with maximum temperature at the center 500°C, decreasing toward the perimeter.  
Safety tap with thermocouple and progressive adjustment of power output.  
Oven - General Features  
Stainless steel cooking chamber (53x70x30cm), thermally insulated and equipped with 3 anti-tip guides for 1/1 and 2/1 reduced gastronorm containers.  
Thick cast iron radiant sole for effective heat distribution.  
Stainless steel door and counter door, perfectly insulated and mounted on self-balancing hinges.  
Ergonomic full-length, thermally insulated handle.  
Gas oven  
Stabilized flame burner housed under the sole.  
Pilot burner with piezoelectric and manual ignition.  
Automatic valve with gas safety thermocouple.  
Thermostatic temperature control from 110 to 330°C.  
Electric oven  
Groups of stainless steel heating elements placed on the ceiling and under the sole of the firing chamber.  
Thermostatic temperature control in the chamber from 100°C to 300°C.

Various connection possibilities.  
Warning light indicating "equipment under voltage."  
Indicator light indicating that the set temperature has been reached.

A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.

Entirely moulded top made from thick stainless steel plate.

Enamelled cast-iron grills with long spokes for easy movement of pans between fires.

High power cast iron burners 3.5- 5.7- 7 kW.

Protected pilot flame with removable and easily washable protection.

Thanks to the jet-proofing certification obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

# GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON OPEN BASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1013189

MODELLO  
Q70TPMV/G8003SX

SERIE  
QUEEN 7

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1013189
DEFINITION	Q70TPMV/G8003SX TUTTAP.GAS+2F POT.SX A/G
COMMERCIAL LINE	QUEEN
SUPPLY	GAS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	870 mm
NET WEIGHT	84 Kg
VOLUME (net)	0.487
PACKAGE LENGTH	840 mm
PACKAGE WIDTH	980 mm
PACKAGING HEIGHT	520 mm
PACKAGE VOLUME	1,440 m3
GROSS PACKING WEIGHT	94.6 Kg
GAS POWER	16.5
GAS POWER (G25.3/25mbar)	16,50
GAS/REFRIGERANT TYPE	METANO "H, E" G20 20/25mbar
N. FIRES/PLATES	DUE FUOCHI
CERTIFIED MODEL	Q70TPMV/G80SX

GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON  
OPEN BASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1013189

MODELLO  
Q70TPMV/G8003SX

SERIE  
QUEEN 7

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

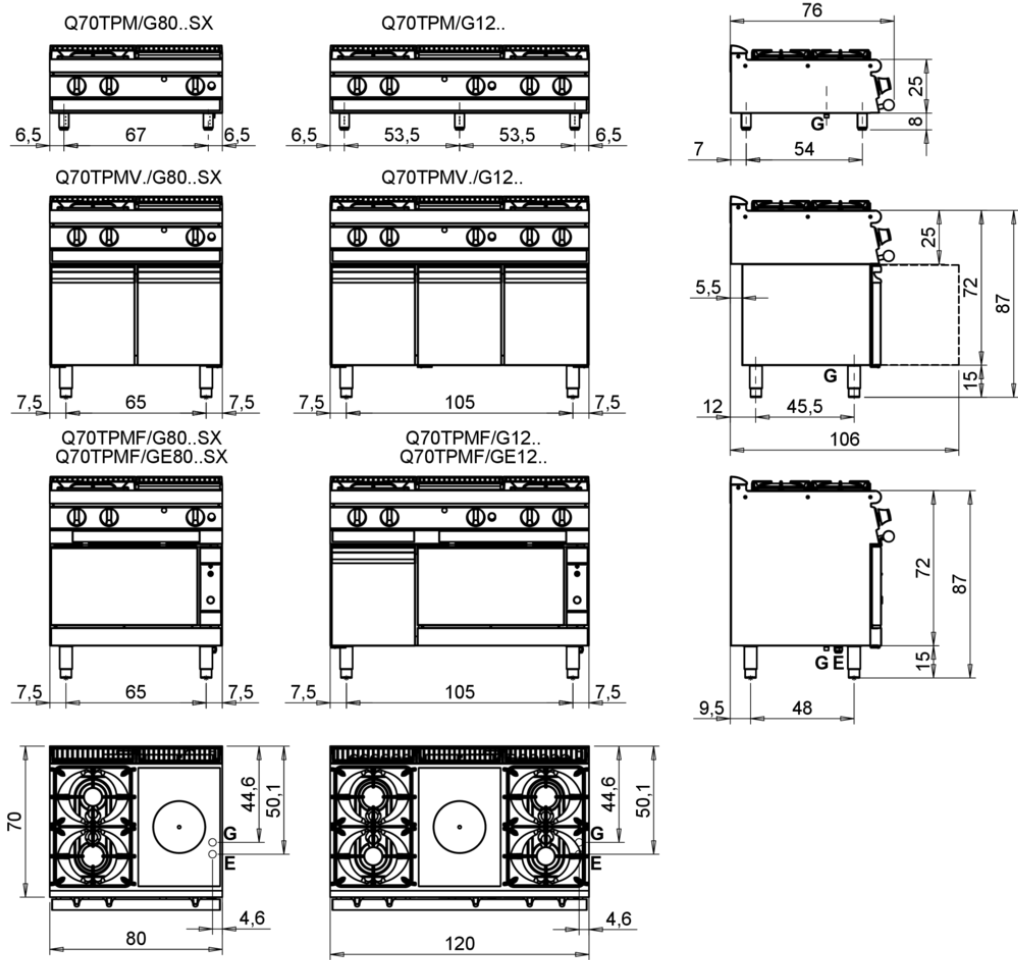

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
<b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás <b>EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)</b>
<b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	<b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
<b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	<b>A1</b> = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno <b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
<b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	<b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
<b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
<b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

## GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON OPEN BASE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1013189

MODELLO  
Q70TPMV/G8003SX

SERIE  
QUEEN 7

# PRODUCT'S RANGE PLUS



Thick top plate with removable  
centre ring.



A single high-efficiency central  
burner that results in differentiated  
heat zones on the floor with a  
concentration of maximum heat in  
the centre and decreasing  
temperatures in the peripheral  
zones.