

ELECTRIC BAIN-MARIE CAPACITY 1 X GN1/1 + 2 X GN1/4

Project
Rev.:
Zone:
Location:



CODICE
CR0856199

MODELLO
6NBM/E600

SERIE
SERIE 600

GENERAL CHARACTERISTICS

A line of small-sized cooking equipment designed for those who, even in small spaces, do not want to give up great performance. Made of AISI 304 18/10 stainless steel, finely finished with Scotch Brite satin finish, it has rounded edges and large capacity enclosures; it has 600/650 mm depth and modular width of 400/600/700/800/1000 mm; the series is completed by open, armored or refrigerated base supports.

The equipment is easily modular to one another until it forms a compact, gap-free whole thanks to a leak-covering profile that provides protection against leakage and thus maximum hygiene. High chimneys, ergonomic knobs mounted on a sloping dashboard for easy visibility, give the range ease of use from the first approach.

All models are CE approved.



TECHNICAL SPECIFICATIONS

The power installed for electric water baths, ensures rapid set-up of the equipment and maintenance of the chosen operating temperature. The basin is designed to hold Gastro Norm bowls up to a depth of 150 mm and is sloped toward the front to allow proper water discharge through the drain cock on the front of the machine.

The 'equipment is equipped with a safety thermostat, adhesive heating elements and indicator light to signal heating activity. The temperature is adjustable by thermostatic control from 30 to 90°C.

The bain-marie have basins suitable for holding GN bowls with a maximum height of 15 cm, and are complete with perforated false bottom and drain cock.

ELECTRIC BAIN-MARIE CAPACITY 1 X GN1/1 + 2 X GN1/4

Project
Rev.:
Zone:
Location:



CODICE
CR0856199

MODELLO
6NBM/E600

SERIE
SERIE 600

Technical Information

SPECIFICATION	DATA
MATERIAL	CR0856199
DEFINITION	BAGNOMARIA EL.60 M60 6NBM/E600
COMMERCIAL LINE	SERIE 600
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	600 mm
DIM. HEIGHT	295 mm
NET WEIGHT	12.7 Kg
VOLUME (net)	0.106
PACKAGE LENGTH	630 mm
PACKAGE WIDTH	630 mm
PACKAGING HEIGHT	400 mm
PACKAGE VOLUME	0,159 m3
GROSS PACKING WEIGHT	20 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	1.8 kW
IP GRADE	IPX4
CERTIFIED MODEL	6NBM/E600

ELECTRIC BAIN-MARIE CAPACITY 1 X GN1/1 + 2 X GN1/4

Project
 Rev.:
 Zone:
 Location:




CODICE
CR0856199

MODELLO
6NBM/E600

SERIE
SERIE 600

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

**MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
 MESURES EN mm - MEDIDAS EN mm - MATEN IN mm**

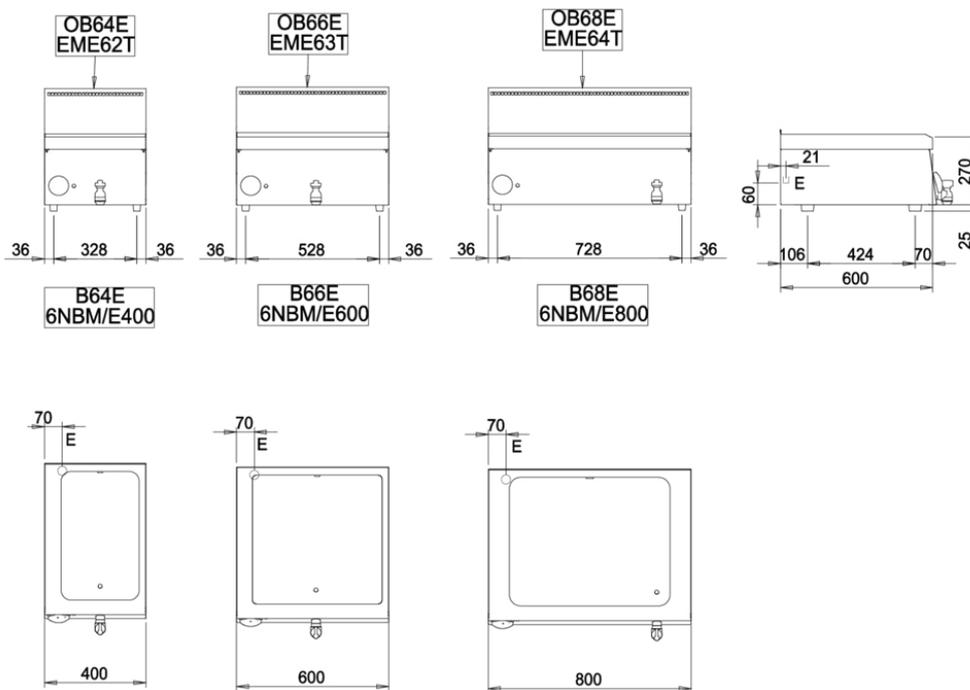

LEGENDA - LEGENDE - KEY - LEGENDE - LEYENDA - LEGENDA

E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse etoupr de cable el Pisacable - Elektrische kabelwartel

ELECTRIC BAIN-MARIE CAPACITY 1 X GN1/1 + 2 X GN1/4

Project
Rev.:
Zone:
Location:



CODICE
CR0856199

MODELLO
6NBM/E600

SERIE
SERIE 600

PRODUCT'S RANGE PLUS



The bottom is sloping towards the drain to facilitate water drainage.



The bain-marie have basins suitable for holding GN bowls with a maximum height of 15 cm, and are complete with perforated false bottom and drain cock.

Equipment is certified and compliant with the Low Voltage Directive 2014/35/EU according to the international CB scheme

