

# DIRECT STEAM ELECTRIC COMBI OVEN - 7 X 1/1GN - 10X600X400 ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1484091

MODELLO  
HOET071E

SERIE  
Horizon III

## GENERAL CHARACTERISTICS

HORIZON III - Professional oven for catering.

Perfectly smooth and airtight baking chamber with rounded edges.

Closing door with double tempered, air gap glass and heat-reflective inner glass for less heat radiation to the operator and greater efficiency.

Inner glass with folding opening for easy cleaning operation.

Opening baffle for easy cleaning operation of the fan on open cabinet.

Adjustable door hinges for optimal sealing.



# DIRECT STEAM ELECTRIC COMBI OVEN - 7 X 1/1GN - 10X600X400 ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1484091

MODELLO  
HOET071E

SERIE  
Horizon III

## TECHNICAL SPECIFICATIONS

The Touch oven control panel has high-visibility LED alphanumeric displays (HVS - High Visibility System) to ensure clear readability. It also features a 2.4-inch color display (LCD - TFT) that allows you to view your favorite programs, preset programs, variable fan options, automatic washing, menu and settings in a clear and intuitive manner.

**COOKING MODE:** Automatic with 95 tested and memorised cooking programmes, including programmes for reheating on plate and baking tray. Programmable with the possibility of storing 99 cooking programmes in automatic sequence (up to 9 cycles) by assigning a dedicated name and icon. Manual cooking with three cooking modes with immediate start: convection from 30°C to 260°C, steam from 30°C to 130°C, combined convection + steam from 30°C to 260°C. **Clima®** - Automatic system for measuring and controlling the percentage of humidity in the cooking chamber. Quick scroll & push selection of favourite programmes, with dedicated scroller.

**OPERATION:** HVS (High Visibility System) alphanumeric LED displays for temperature, Clima, time and core temperature. 2.4 inch colour display (LCD - TFT) for displaying favourite programmes, preset programmes, ventilation, automatic washing, menus, settings. **SCROLLER** knobs with Scroll and Push function to confirm choices. Manual preheating.

**CONTROL FEATURES:** Autoreverse (automatic reversal of fan rotation direction) for perfect cooking uniformity. Automatic chamber vent control. Manual humidifier. LED cooking chamber lighting. Easy access to

programmable user parameters, to customise the appliance via user menus. 2 ventilation speeds, the reduced speed activates the reduction of heating power. Intermittent speed is available for special cooking. Core temperature control with 4-point probe (core probe optional). Needle core probe Ø 1 mm, for vacuum cooking and small pieces (optional). USB connection for downloading HACCP data, updating software and uploading/downloading cooking programs. Preparation for SN energy optimisation system (optional). **SERVICE** programme: Electronic board function test - Temperature probe display - Equipment operating hours counter for all main functions for scheduled maintenance. Functional check self-diagnosis before starting to use the equipment, with descriptive and acoustic signalling of any anomalies. **EcoSpeed** - Based on the quantity and type of product, the oven optimises and controls the energy supply, always maintaining the right cooking temperature and avoiding fluctuations. **EcoVapor** - The EcoVapor system achieves a clear reduction in water and energy consumption by automatically controlling the steam saturation in the cooking chamber. IPX3 protection against water jets.

**MAINTENANCE CLEANING:** LCS (Liquid Clean System) automatic cleaning system (optional), with integrated tank and automatic dosage (CombiClean liquid detergent, in 100% recyclable cartridges. Supplied with 1 cartridge canister of liquid detergent CDL05 - 990 g). 7 automatic washing programmes. Manual washing system with external hand shower (hand shower optional).

**DIRECT STEAM ELECTRIC COMBI OVEN - 7 X 1/1GN -  
10X600X400 ASSISTED COOKING - ELECTRONICALLY  
CONTROLLED MANUAL CONTROLS**

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1484091**

MODELLO  
**HOET071E**

SERIE  
**Horizon III**

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1484091
DEFINITION	ICET071E MISTO EL.7T C/TOUCH
COMMERCIAL LINE	ICON E
SUPPLY	ELECTRICS
DIM. WIDTH	812 mm
DIM. PRODUCTIVITY	725 mm
DIM. HEIGHT	935 mm
NET WEIGHT	95 Kg
VOLUME (net)	0.55
PACKAGE LENGTH	910 mm
PACKAGE WIDTH	870 mm
PACKAGING HEIGHT	1160 mm
PACKAGE VOLUME	0,918 m3
GROSS PACKING WEIGHT	109 Kg
STANDARD POWER SUPPLY	3NAC400V/3AC230V 50Hz
ELECTRICAL POWER	12.5 kW
GAS/REFRIGERANT TYPE	NO GAS
IP GRADE	IPX3
CERTIFIED MODEL	HOET071E

DIRECT STEAM ELECTRIC COMBI OVEN - 7 X 1/1GN -  
10X600X400 ASSISTED COOKING - ELECTRONICALLY  
CONTROLLED MANUAL CONTROLS




Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1484091

MODELLO  
HOET071E

SERIE  
Horizon III

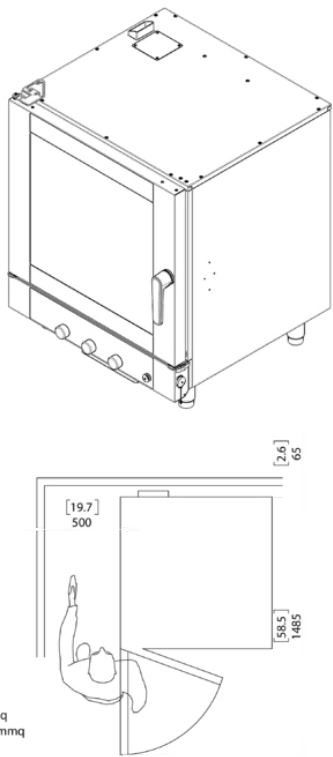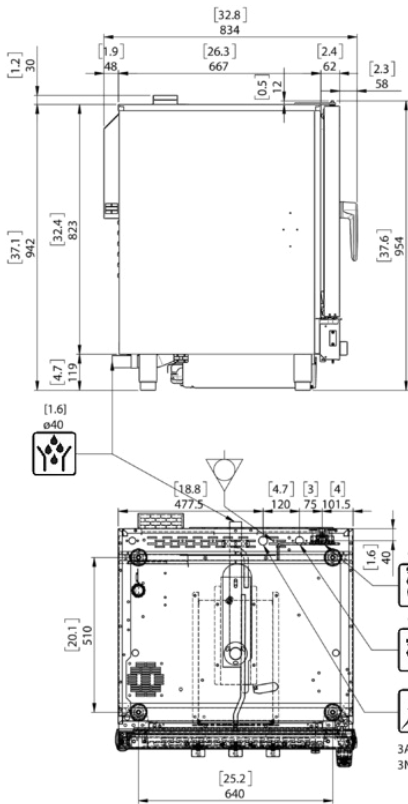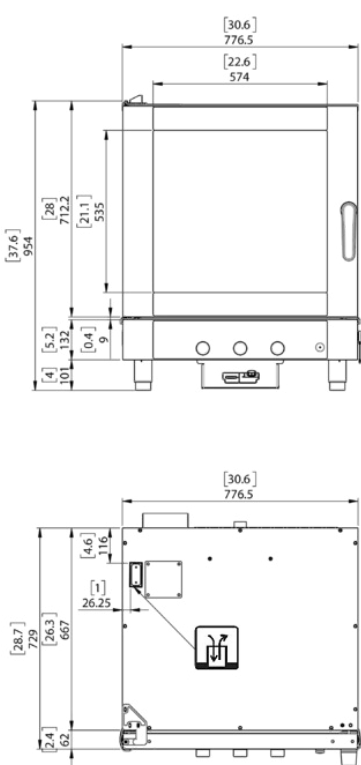

Dimensions: Millimeters [inches]

ICET071E/ICEM071E

I dati riportati sul presente documento sono da ritenersi non vincolanti. L'azienda si riserva di apportare modifiche tecniche in qualsiasi momento.  
The specification shown in this document are to be considered non binding. The company reserves the right to make technical change at any moment.  
Die auf dieser Unterlage angegebenen technischen Daten sind als unverbindlich anzusehen. Die Firma behält sich das Recht vor zu jeder Zeit technische Änderungen vorzunehmen.  
Les données techniques sur ce document ne doivent pas être considérées contraignantes. La société se réserve le droit d'apporter des modifications techniques à tout moment.  
Los datos técnicos indicados en el presente catálogo no son vinculantes. La empresa se reserva el derecho de efectuar modificaciones sin previo aviso.

# DIRECT STEAM ELECTRIC COMBI OVEN - 7 X 1/1GN - 10X600X400 ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1484091**

MODELLO  
**HOET071E**

SERIE  
**Horizon III**

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
IKKV51S	<b>IKKV51S</b>	EXTRACTION HOOD WITH AIR-COOLED CONDENSER FOR STACKING KIT. PREARRANGED ELECTRIC MODELS ONLY
RP04	<b>RP04</b>	SET OF CASTORS FOR STANDS, 2 OF WHICH WITH BRAKES
NPT071	<b>NPT071</b>	TRAY HOLDER - INSERTABLE ON 45 MM CENTRE DISTANCE SUPPORT
NPT064	<b>NPT064</b>	TRAY HOLDER - INSERTABLE ON STAND
NPF04	<b>NPF04</b>	FLANGED FEET KIT FOR SUPPORTS, FOR NAVAL INSTALLATIONS
KISC04	<b>KISC04</b>	MULTIPOINT CORE PROBE KIT. Ø 3 MM - T VERSION
KISA01	<b>KISA01</b>	CORE NEEDLE PROBE KIT. Ø 1 MM - VERSION T
KIPS071E	<b>KIPS071E</b>	KIT FOR OPPOSITE HINGED DOOR
KFP002	<b>KFP002</b>	FOOT STOPPER KIT
ISR071S	<b>ISR071S</b>	STAINLESS STEEL BASE SUPPORT FOR BLAST CHILLER INSERTION MOD. 050-051 - FULL AISI 304
ISR071E	<b>ISR071E</b>	STAINLESS STEEL BASE SUPPORT - FULL AISI 304
ILV126	<b>ILV126</b>	PROVING CABINET WITH HUMIDIFIER AND PROGRAMMABLE DIGITAL CONTROLS - GLASS DOORS
IKKV51	<b>IKKV51</b>	FUME HOOD WITH AIR CONDENSER
IGP716	<b>IGP716</b>	PAIR OF SHELF RACKS - GN - 600 X 400
IGP664	<b>IGP664</b>	PAIR OF BULKHEADS - 600 X 400
ICLD	<b>ICLD</b>	HAND SHOWER COMPLETE WITH FITTINGS AND CONNECTIONS
ICFX02	<b>ICFX02</b>	FAT FILTER - 2pcs
IBAS051	<b>IBAS051</b>	SHATTERPROOF BAR
PCSM	<b>PCSM</b>	FLOWMETER 10-100
PCSK	<b>PCSK</b>	PURITY C STEAM FILTER HEAD KIT
PCSF	<b>PCSF</b>	PURITY C STEAM 1100 CARTRIDGE
CCE	<b>CCE</b>	HOOD MANIFOLD FOR EXTERNAL CONNECTION - Ø 150 MM
PLG5032	<b>PLG5032</b>	PLUG - 380 V - 32A - 5P
CBL5025	<b>CBL5025</b>	CABLE - 3 MT - 5 X 2,5 MMQ
RP004	<b>RP004</b>	WHEEL SET OF WHICH 2 WITH BRAKE
IKG071	<b>IKG071</b>	OVERLAY KIT
IKG051	<b>IKG051</b>	OVERLAY KIT
IKE071	<b>IKE071</b>	OVERLAY KIT
IKE051	<b>IKE051</b>	OVERLAY KIT

# DIRECT STEAM ELECTRIC COMBI OVEN - 7 X 1/1GN - 10X600X400 ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....
















CODICE  
CR1484091

MODELLO  
HOET071E

SERIE  
Horizon III

## OPTIONAL

MODELLO	DESCRIZIONE
 <b>NPK</b>	PREARRANGEMENT FOR SUCTION HOOD CONNECTION
<b>ISP664</b>	SUPPLEMENT FOR BAKERY VERSION IGP-664 TRAY HOLDER BULKHEAD
<b>ISC04</b>	MULTIPOINT CORE PROBE. Ø 3 MM - T VERSION
 <b>ISA01</b>	NEEDLE CORE PROBE. Ø 1 MM - T VERSION
<b>IPS071</b>	OPPOSITE DOOR
 <b>ILCS2</b>	LCS AUTOMATIC WASHING SYSTEM - 1 CARTRIDGE CANISTER OF LIQUID DETERGENT INCLUDED CDL05 - 990 GR. - T VERSION"
 <b>SN</b>	ENERGY OPTIMIZATION SUPPLEMENT. FOR ELECTRIC MODELS ONLY
 <b>APDS</b>	SECURITY DOOR OPENING WITH DOUBLE CLICK
 <b>TS-ICE-071E-F60</b>	3-AC 480 V - 60 HZ
 <b>TS-ICE-071E-F50</b>	3-AC 480 V - 50 HZ
 <b>TS-ICE-071E-E60</b>	3N-AC 440 V - 60 HZ
 <b>TS-ICE-071E-E50</b>	3N-AC 440 V - 50 HZ
 <b>TS-ICE-071E-D60</b>	3-AC 440 V - 60 HZ
 <b>TS-ICE-071E-D50</b>	3-AC 440 V - 50 HZ
 <b>TS-ICE-071E-C60</b>	3-AC 400 V - 60 HZ
 <b>TS-ICE-071E-C50</b>	3-AC 400 V - 50 HZ