

# ELECTRIC DIRECT STEAM COMBI STEAMER - 6 X 2/3 GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1481580

MODELLO  
HOCM026E

SERIE  
Horizon III Slim

## GENERAL CHARACTERISTICS

HORIZON III Slim - Professional oven for catering.  
Perfectly smooth and airtight baking chamber with rounded edges.  
Closing door with double tempered, air gap glass and heat-reflective inner glass for less heat radiation to the operator and greater efficiency.  
Inner glass with folding opening for easy cleaning operation.  
Opening baffle for easy cleaning operation of the fan on open cabinet.  
Adjustable door hinges for optimal sealing.



## TECHNICAL SPECIFICATIONS

The control panel of the manual oven consists of selectors and knobs with an ergonomic design that makes it easy to use and intuitive. Functions are controlled by electromechanical controls, while indicator lights provide feedback on oven operation clearly and immediately.

**COOKING MODE:** Manual cooking with three cooking modes: Convection from 50°C to 260°C, Steam from 50°C to 130°C, Combined from 50°C to 260°C.

**OPERATION:** Electromechanical selector control panel with operation control lights.

**CONTROL FEATURES:** Autoreverse (automatic reversal of fan rotation direction) for perfect cooking uniformity. Manual chamber venting. LED cooking chamber lighting. IPX3 protection against water jets.

**CLEANING, ORDINARY MAINTENANCE:** Manual washing system with external hand shower (hand shower optional).

# ELECTRIC DIRECT STEAM COMBI STEAMER - 6 X 2/3 GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1481580

MODELLO  
HOCM026E

SERIE  
Horizon III Slim

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1481580
DEFINITION	ICCM026E MISTO EL.06GN2/3 C/DIG.
COMMERCIAL LINE	ICON51 E
SUPPLY	ELECTRICS
DIM. WIDTH	510 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	880 mm
NET WEIGHT	57 Kg
VOLUME (net)	0.281
PACKAGE LENGTH	760 mm
PACKAGE WIDTH	570 mm
PACKAGING HEIGHT	1100 mm
PACKAGE VOLUME	0,476 m3
GROSS PACKING WEIGHT	68 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	5.25 kW
GAS/REFRIGERANT TYPE	NO GAS
IP GRADE	IPX4
CERTIFIED MODEL	HOCM026E

# ELECTRIC DIRECT STEAM COMBI STEAMER - 6 X 2/3 GN ELECTROMECHANICAL CONTROLS


Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1481580

MODELLO  
HOCM026E

SERIE  
Horizon III Slim

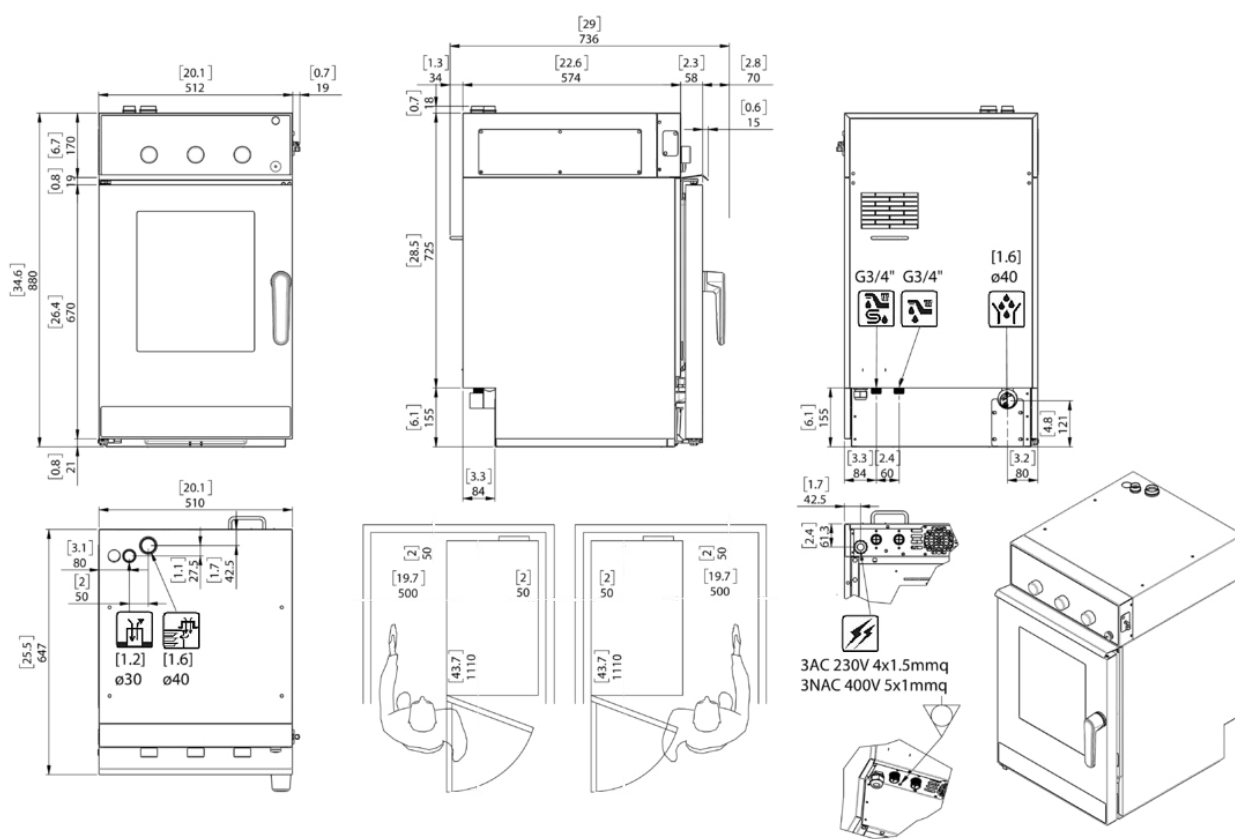

Dimensions: Millimeters [inches]

ICCT026E/ICCM026E NEUTRI

I dati riportati sul presente documento sono da ritenersi non vincolanti. L'azienda si riserva di apportare modifiche tecniche in qualsiasi momento.  
The specification shown in this document are to be considered non binding. The company reserves the right to make technical change at any moment.  
Die auf dieser Unterlage angegebenen technischen Daten sind als unverbindlich anzusehen. Die Firma behält sich das Recht vor zu jeder zeit technische Änderungen vorzunehmen.  
Les données techniques sur ce document ne doivent pas être considérées contraignantes. La société se réserve le droit d'apporter des modifications techniques à tout moment.  
Los datos técnicos indicados en el presente catálogo no son vinculantes. La empresa se reserva el derecho de efectuar modificaciones sin previo aviso.

# ELECTRIC DIRECT STEAM COMBI STEAMER - 6 X 2/3 GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1481580

MODELLO  
HOCM026E

SERIE  
Horizon III Slim

## PRODUCT'S RANGE PLUS



2-speed ventilation. Intermittent ventilation function is available for special cooking.



always cooking uniformity, thanks to the CLIMA system: automatic temperature and humidity control always ideal depending on the food being cooked.



For gas ovens, the Green Fine Tuning burner modulation system and patented high-efficiency heat exchanger prevent wasted power and reduce harmful emissions.



The Ecospeed Dynamic system, depending on the quantity and type of product, optimises and controls the energy supply, ensuring the correct cooking temperature at all times, avoiding fluctuations and thus lower energy and water consumption and reduced weight loss.

# ELECTRIC DIRECT STEAM COMBI STEAMER - 6 X 2/3 GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1481580**

MODELLO  
**HOCM026E**

SERIE  
**Horizon III Slim**

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
SM026	<b>SM026</b>	STAINLESS STEEL WALL BRACKET
PLG5016	<b>PLG5016</b>	PLUG - 380 V - 16A - 5P
PAC026	<b>PAC026</b>	STAINLESS STEEL HEAT PROTECTION FOR SIDE WALL
KP004	<b>KP004</b>	FOOT KIT - 150 MM H
KFIC026E	<b>KFIC026E</b>	PULL-OUT BUILT-IN OVEN KIT, WITH INTEGRATED EXTRACTOR HOOD 1N-AC230 V - 3.0 KW
ICLD	<b>ICLD</b>	HAND SHOWER COMPLETE WITH FITTINGS AND CONNECTIONS
CKO026SE	<b>CKO026SE</b>	SUCTION HOOD
CKO026E	<b>CKO026E</b>	EXTRACTOR HOOD WITH AIR CONDENSER - CAN ONLY BE USED ON PRE-FITTED OVENS
CIN026	<b>CIN026</b>	COOLING AIR CONVEYOR FOR RECESSED INSTALLATION. STAINLESS STEEL
CBL5015	<b>CBL5015</b>	CABLE - 3 MT - 5 X 1,5 MMQ
KCOE026	<b>KCOE026</b>	HORIZON III SLIM OVERLAY KIT
PCSM	<b>PCSM</b>	FLOWMETER 10-100
PCSK	<b>PCSK</b>	PURITY C STEAM FILTER HEAD KIT
PCSF	<b>PCSF</b>	PURITY C STEAM 1100 CARTRIDGE
CCE	<b>CCE</b>	HOOD MANIFOLD FOR EXTERNAL CONNECTION - Ø 150 MM
ICFX01	<b>ICFX01</b>	FAT FILTER












ELECTRIC DIRECT STEAM COMBI STEAMER - 6 X 2/3  
GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE CR1481580	MODELLO HOCM026E	SERIE Horizon III Slim
---------------------	---------------------	---------------------------

OPTIONAL

MODELLO	DESCRIZIONE
	NPS OPPOSITE DOOR
	NPK PREARRANGEMENT FOR SUCTION HOOD CONNECTION
	MKC026 MARINE VERSION KIT
	SN ENERGY OPTIMIZATION SUPPLEMENT, FOR ELECTRIC MODELS ONLY
	APDS SECURITY DOOR OPENING WITH DOUBLE CLICK
	TS-CI-026RE-C50 3-AC 400 V - 50 HZ
	TS-CI-026RE-A50 1N-AC 230 V - 50 HZ
	TS-CI-026RE-H60 1N-AC 230 V - 60 HZ - 3,7 KW
	TS-CI-026RE-H50 1N-AC 230 V - 50 HZ - 3,7 KW
	TS-CI-026RE-C60 3-AC 400 V - 60 HZ
	TS-CI-026RE-A60 1N-AC 230 V - 60 HZ