

# FRY TOP S Electric M40 Chrome Plate - Smooth - On thermostat compartment

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1654929T4W

MODELLO  
QT90SFTV/E405-T4W

SERIE  
BARON 4.0

## GENERAL CHARACTERISTICS

From the solid foundation of Baron tradition, comes the new Queen 4.0 kitchen, even more practical, more accessorized, more technological.

An evolution in the field of professional kitchens.

Queen 4.0 is perfectly designed in detail to speed up and simplify every task of preparation, cooking, tidying up, and cleaning in the kitchen, and stand by you every day as a true ally in your work.



## TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Baking plate 15 mm thick totally independent of the top.

Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer.

Cooking plates made with satin-finished surface and surface coated with soft iron, AISI430 steel or polished hard chrome, all available in smooth mixed or ribbed.

Large grease collection drawer.

Module sizes: 40,60,80

In the 120-width modules, the cooking plate is lowered from the top by 40 mm and tilted 10 mm toward the front of the machine.

Electric version: heating by incoloy armored heating elements.

Cooking temperature controlled thermostatically and adjustable from 110 to 280°C.

Safety thermostat.

Large fat collection drawer with capacity of the entire volume of the perimeter channel

Grooved plate design ensures cleanliness right to the end of the plate

Plate not welded to the machine bed with optimisation of structural points under thermal stress

Plate not welded to the machine bed with optimisation of structural points under thermal stress

Thermal cutting that facilitates the user and adjacent machinery.

Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.

Water dispenser kit available as an accessory

# FRY TOP S Electric M40 Chrome Plate - Smooth - On thermostat compartment

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1654929T4W

MODELLO  
QT90SFTV/E405-T4W

SERIE  
BARON 4.0

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1654929T4W
DEFINITION	QT90SFTV/E405-T4W FTE LISCIO CR. M40 A/G
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	64 Kg
VOLUME (net)	0.313
PACKAGE LENGTH	440 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1160 mm
PACKAGE VOLUME	0,435 m3
GROSS PACKING WEIGHT	74 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	5 kW
IP GRADE	IPX5
CERTIFIED MODEL	TQ90SFTV/E405-T4W

FRY TOP S Electric M40 Chrome Plate - Smooth - On  
thermostat compartment

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1654929T4W

MODELLO  
QT90SFTV/E405-T4W

SERIE  
BARON 4.0

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

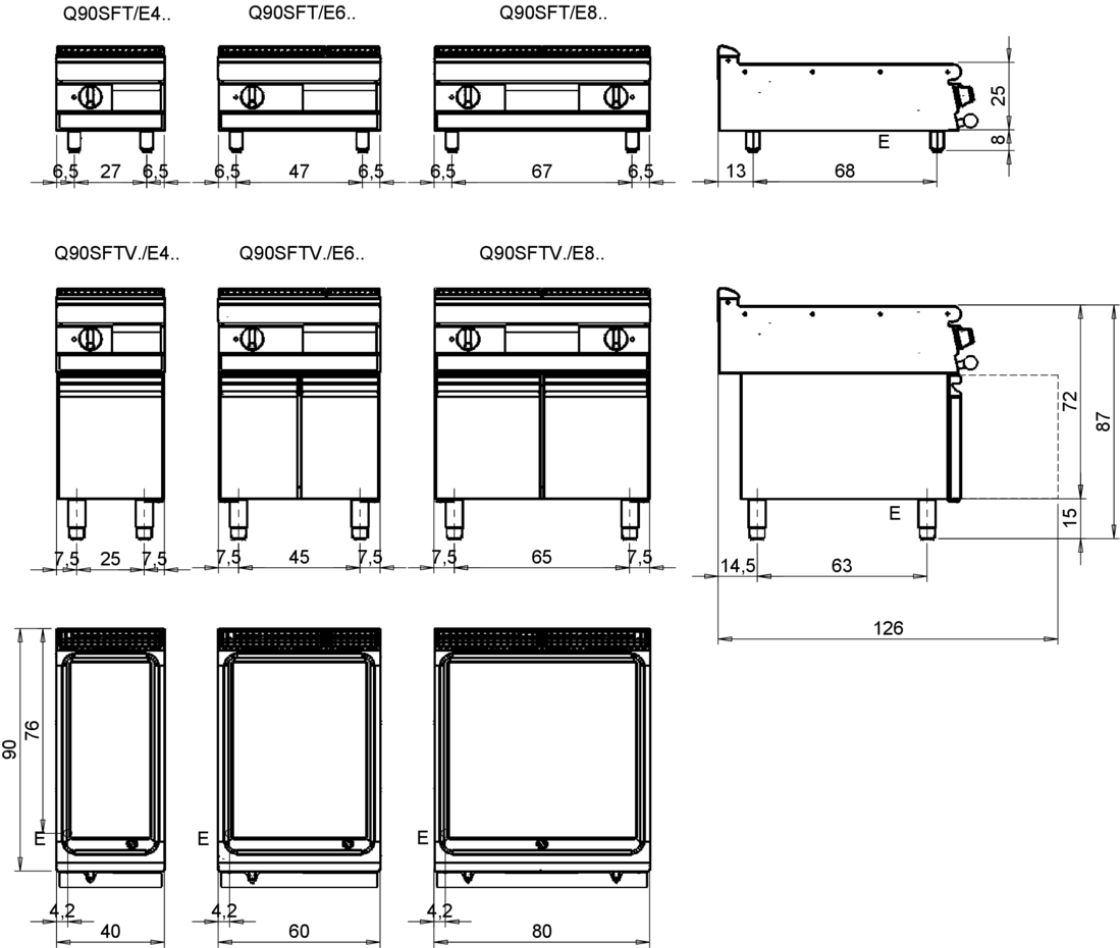

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
<b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
<b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	<b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
<b>S1</b> Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	<b>A1</b> = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno <b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
<b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão	<b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
<b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
<b>S4</b> Scarico - Abflusrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

# FRY TOP S Electric M40 Chrome Plate - Smooth - On thermostat compartment

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1654929T4W

MODELLO  
QT90SFTV/E405-T4W

SERIE  
BARON 4.0

## PRODUCT'S RANGE PLUS



Available as an accessory, the continuous discharge tube allows waste to be disposed of in an external receptacle.



Power level control via touch screen and adjustment with ergonomic knob



Industry 4.0 ready version.



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.




Grooved plate design ensures cleanliness right to the end of the plate



Thermal cutting that facilitates the user and adjacent machinery.



Non-welded plate to speed up maintenance and possible replacement in utilities.



Water dispenser kit available as an accessory

# FRY TOP S Electric M40 Chrome Plate - Smooth - On thermostat compartment

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1654929T4W

MODELLO  
QT90SFTV/E405-T4W

SERIE  
BARON 4.0

## PRODUCT'S RANGE PLUS



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Capacious grease collection drawer with capacity of the entire volume of the perimeter channel.



Stainless steel overflow plug provided as standard for gutter flooding management.



Predisposition for core probe, for even greater cooking control. Reaching the set core temperature is signalled by an acoustic signal.



Plate not welded to the machine table with optimization of structural points subjected to thermal stress.



Floodable gutter for collecting cooking residue all around the perimeter of the plate easier cleaning, and better moisture retention of cooking food.

# FRY TOP S Electric M40 Chrome Plate - Smooth - On thermostat compartment

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1654929T4W

MODELLO  
QT90SFTV/E405-T4W

SERIE  
BARON 4.0

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658619	97CPFT4	M40 fry top cleaning drawer
CR1658609	97TFT	Plancha cleaning cap
CR1357499	4.0IOTPRO	PRO Subscription - Cloud
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud
CR1354999	PKLR	Replacement blades (10PCS)
CR1658669	9AFT4	Splash guard riser 90cm M40
CR1658839	Q794CAFT	WATER LOADING FOR FRY TOP M40 - 70 90 QUEEN - GAS OR ELECTRIC
CR1658919	Q94EKSCFT	CONTINUOUS DRAIN FOR FRY TOP M40 - 90 QUEEN - ELECTRIC
CR1658949	Q94ECASCFT	CONTINUOUS LOAD + SCAR.FOR FRY TOP M40 - 90 QUEEN - ELECTRIC