

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:



CODICE
CR1017949T4W

MODELLO
QT90BMV/E800-T4W

SERIE
BARON 4.0

GENERAL CHARACTERISTICS

From the solid foundation of Baron tradition, comes the new Queen 4.0 kitchen, even more practical, more accessorized, more technological.

An evolution in the field of professional kitchens.

Queen 4.0 is perfectly designed in detail to speed up and simplify every task of preparation, cooking, tidying up, and cleaning in the kitchen, and stand by you every day as a true ally in your work.



TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with a thickness of 2 mm.

Tank dimensions Gastro Norm.

Perforated false bottom for supporting containers.

Adjustable temperatures from 30° to 90°C.

Tub equipped with an overflow level.

Armored heating elements placed outside the tank, water loading by solenoid valve.

Different GN tray combinations

Examples:

M40: 1xGN1/3 + 1xGN 1/1 TANK

M80: 2xGN1/3 + 2xGN 1/1 TRAY

Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.

Data collection, operation monitoring, remote control are just some of the possibilities that connectivity puts at your disposal.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:



CODICE
CR1017949T4W

MODELLO
QT90BMV/E800-T4W

SERIE
BARON 4.0

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1017949T4W
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	5.4 kW

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:




CODICE
CR1017949T4W

MODELLO
QT90BMV/E800-T4W

SERIE
BARON 4.0

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - INSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

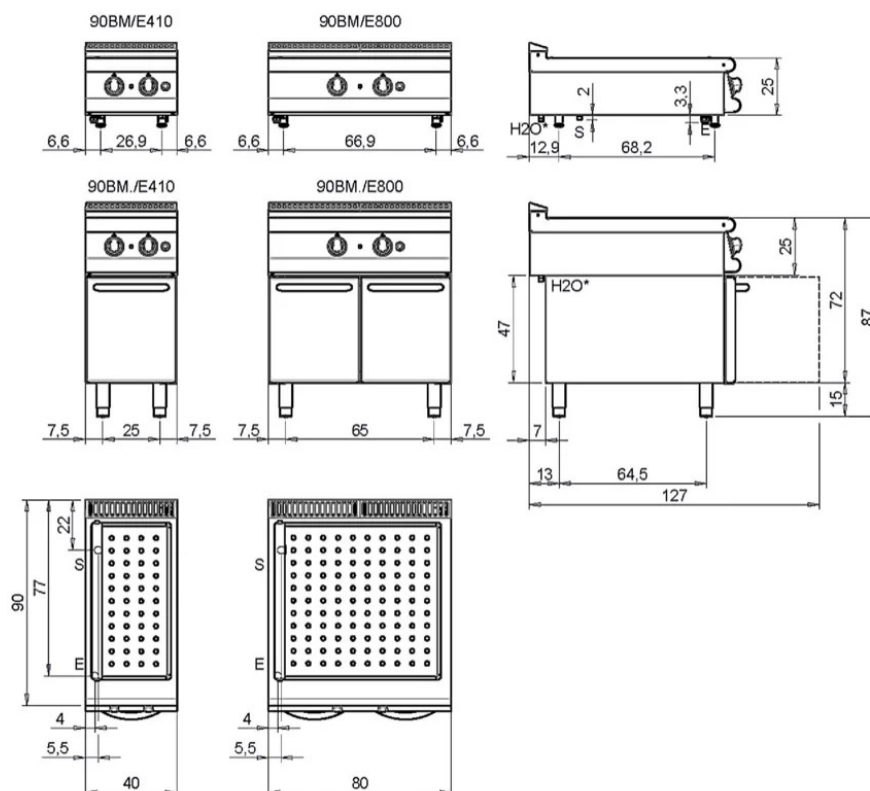

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligaçao gás
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Waterafloopaansluiting - Junção descarga água EN ISO 228-1 G1	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água EN ISO 228-1 G1/2
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão	
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Afloopbuis - Tubulação de dreno	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:



CODICE
CR1017949T4W

MODELLO
QT90BMV/E800-T4W

SERIE
BARON 4.0

PRODUCT'S RANGE PLUS



Power level control via touch screen
and adjustment with ergonomic
knob




Integrated water dispenser in tank



Industry 4.0 ready version.



Different GN tray combinations
Examples:
M40: 1xGN1/3 + 1xGN 1/1 TANK
M80: 2xGN1/3 + 2xGN 1/1 TRAY



Adjustable temperature in tank with
overflow and perforated false
bottom for supporting containers.
GN-sized tank.



Possibility of setting 2 timers to
control cooking. An acoustic signal
warns the operator at the end of the
set time.

ELECTRIC BAIN-MARIE ON OPEN COMPARTMENT

Project
Rev.:
Zone:
Location:



CODICE
CR1017949T4W

MODELLO
QT90BMV/E800-T4W

SERIE
BARON 4.0

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1357499	4.0IOTPRO	PRO Subscription - Cloud
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud