

# HYPER TECH WASH PLUS - BPHTW1S8PLUS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BND212087

MODELLO  
BPHTW1S8PLUS

SERIE  
WASHING

## GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



## TECHNICAL SPECIFICATIONS

The new technology of potwashers allows you to easily and intuitively follow all the stages of your potwashing process directly from the control panel. The innovative rinsing circuit, the energy saving function (a device that optimises energy functions avoiding unnecessary waste) the high

level of performance and the high quality materials make these machines extremely competitive and versatile.

# HYPER TECH WASH PLUS - BPHTW1S8PLUS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**BND212087**

MODELLO  
**BPHTW1S8PLUS**

SERIE  
**WASHING**

## Technical Information

SPECIFICATION	DATA
MATERIAL	BND212087
DEFINITION	BPHTW1S8PLUS LAVAOGGETTI EL. 55X66,5
DIM. WIDTH	690 mm
DIM. PRODUCTIVITY	800 mm
DIM. HEIGHT	1890 mm
NET WEIGHT	155 Kg
PACKAGE LENGTH	730 mm
PACKAGE WIDTH	800 mm
PACKAGING HEIGHT	1750 mm
PACKAGE VOLUME	1,022 m3
GROSS PACKING WEIGHT	173 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	8 kW
BASKET SIZE	550x665 mm
WASH CYCLES	2/4/6/8/10 min
WASH PUMP	2180W
WATER CONSUMPTION	4,2 lt

# HYPER TECH WASH PLUS - BPHTW1S8PLUS


Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BND212087

MODELLO  
BPHTW1S8PLUS

SERIE  
WASHING

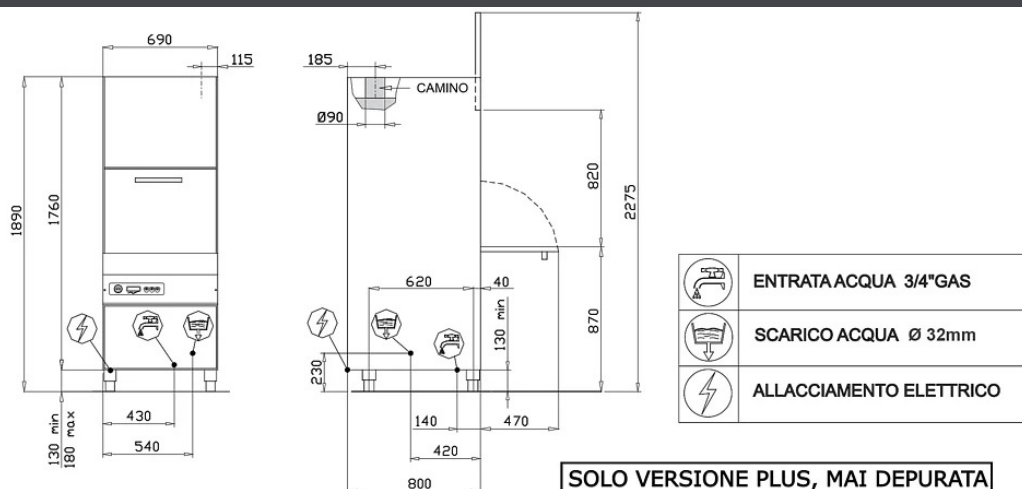

**SOLO VERSIONE PLUS, MAI DEPURATA**

DATI TECNICI					
DIMENSIONI ESTERNE					
larghezza	690 mm				
profondita'	800 mm				
altezza(piedino avvitato)	1890/2275(porta aperta) mm				
PESO NETTO (versione base)	155 kg				
TENSIONE DI ALIMENTAZIONE	400V 3N 50Hz				
POTENZA MASSIMA ASSORBITA	8180 W				
DUREZZA ACQUA	2-8 °F				
PRESSIONE ACQUA ALIMENTAZIONE	200-400 kPa				
ALTEZZA UTILE & CESTI					
altezza utile	805 mm				
DIMENSIONE CESTI					
550X665 mm					
DOTAZIONE CESTI					
1XC86/A - 1XC87/B - 1XC97/A - 1XC100					
N° CICLI (sec)	1 (120)	2 (240)	3 (360)	4 (480)	5 (600)
ALIMENTAZIONE ACQUA 55°C					
produzione cesti(*) <sup>(1)</sup> Cesti/h	30	15	10	7,5	6
ALIMENTAZIONE ACQUA 10°C					
produzione cesti(*) <sup>(1)</sup> Cesti/h	15	15	10	7,5	6
CONSUMO ACQUA PER CICLO	4,2 l				
CAPACITA' BOILER	15 l				
RESISTENZA BOILER	6000 W				
SET. TEMPERATURA RISCIAQUO	85°C				
CAPACITA' VASCA	50 l				
RESISTENZA VASCA	3000 W				
SET. TEMPERATURA VASCA	60°C				
POTENZA POMPA LAVAGGIO	2180 W (810 l/min***)				
POTENZA POMPA RISCIAQUO	250 W (150 l/min***)				
pompa scarico (opzionale)	190 W (120 l/min***)				
LIVELLO DI PRESSIONE ACUSTICA	63.8 dB(A)				

(\*) CON TERMOSTOP DI SERIE (NON DISATTIVABILE)

(\*\*\*) PORTATA MASSIMA

- ENERGY SAVING DI SERIE (NON DISATTIVABILE)

(1) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1

## HYPER TECH WASH PLUS - BPHTW1S8PLUS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BND212087

MODELLO  
BPHTW1S8PLUS

SERIE  
WASHING

# PRODUCT'S RANGE PLUS



Stabilized pressure rinsing and constant boiler water temperature of 85°C. Thanks to the atmospheric boiler, mixing of mains water in the rinse phase is avoided. The PLUS system also ensures greater control and correct dosing of rinse aid in each cycle.



Fully molded basin. Independent stainless steel wash/rinse arms



Double-walled door