

HYPER TECH WASH PLUS - BPHTW3STRPLUS

Project
Rev.:
Zone:
Location:



CODICE
BND212092

MODELLO
BPHTW3STRPLUS

SERIE
WASHING

GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



TECHNICAL SPECIFICATIONS

The new technology of potwashers allows you to easily and intuitively follow all the stages of your potwashing process directly from the control panel. The innovative rinsing circuit, the energy saving function (a device that optimises energy functions avoiding unnecessary waste) the high

level of performance and the high quality materials make these machines extremely competitive and versatile.

HYPER TECH WASH PLUS - BPHTW3STRPLUS

Project
Rev.:
Zone:
Location:



CODICE
BND212092

MODELLO
BPHTW3STRPLUS

SERIE
WASHING

Technical Information

SPECIFICATION	DATA
MATERIAL	BND212092
DEFINITION	BPHTW3STRPLUS LAVAOGGETTI EL. 85X72,5
DIM. WIDTH	990 mm
DIM. PRODUCTIVITY	885 mm
DIM. HEIGHT	2140 mm
NET WEIGHT	264 Kg
PACKAGE LENGTH	1050 mm
PACKAGE WIDTH	950 mm
PACKAGING HEIGHT	2290 mm
PACKAGE VOLUME	2,284 m3
GROSS PACKING WEIGHT	290 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	13.4 kW
BASKET SIZE	850x725 mm
WASH CYCLES	4/7/10/13 min
WASH PUMP	2180W
WATER CONSUMPTION	4,3 lt

HYPER TECH WASH PLUS - BPHTW3STRPLUS


Project
Rev.:
Zone:
Location:



CODICE
BND212092

MODELLO
BPHTW3STRPLUS

SERIE
WASHING

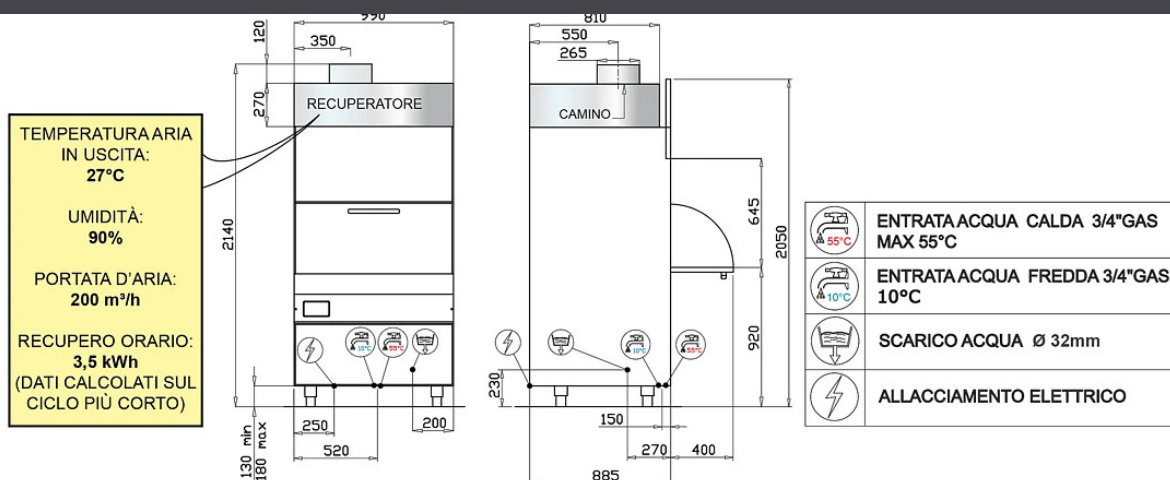

DATI TECNICI					
DIMENSIONI ESTERNE					
larghezza		990 mm			
profondita'		885 mm			
altezza(piedino avvitato)		2140 mm			
PESO NETTO (versione base)		237 kg			
TENSIONE DI ALIMENTAZIONE		400V 3N 50Hz			
POTENZA MASSIMA ASSORBITA		13360 W			
DUREZZA ACQUA		< 8 °F			
CONDUTTIVITA' ACQUA		> 200 8µS/cm			
PRESSIONE ACQUA ALIMENTAZIONE		200-400 kPa			
ALTEZZA UTILE & CESTI					
altezza utile		645 mm			
DIMENSIONE CESTI		850X725 mm			
DOTAZIONE CESTI		1XC86/A - 1XC97/A - 1X92100			
N° CICLI	(minuti)	1 (4)	2 (7)	3 (10)	4 (13)
ALIMENTAZIONE ACQUA 10°C					
produzione cesti(*) ⁽¹⁾	Cesti/h	15	8	6	4
CONSUMO ACQUA PER CICLO		4,3 L			
CAPACITA' BOILER		20 L			
RESISTENZA BOILER		9000 W			
SET. TEMPERATURA RISCACQUO		85°C			
CAPACITA' VASCA		78 L			
RESISTENZA VASCA		6000 W			
SET. TEMPERATURA VASCA		55°C			
POTENZA POMPA LAVAGGIO		2180 W (810 l/min ^{***}) × 2			
POTENZA POMPA RISCACQUO		250 W (150 l/min ^{***})			
pompa scarico (opzionale)		190 W (120 l/min ^{***})			
LIVELLO DI PRESSIONE ACUSTICA		71,1 dB(A)			
(*) CON TERMOSTOP DI SERIE		(*** PORTATA MASSIMA			

(*) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETÀ DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI

PAGINA 1 / 1

HYPER TECH WASH PLUS - BPHTW3STRPLUS

Project
Rev.:
Zone:
Location:



CODICE
BND212092


MODELLO
BPHTW3STRPLUS

SERIE
WASHING

PRODUCT'S RANGE PLUS



Double-walled door



RT system to recover the steam produced by the running machine to preheat the cold feed water. Immediate savings on energy consumption and improved temperature in the working environment, which is no longer saturated by moisture produced by the machine.



Stabilized pressure rinsing and constant boiler water temperature of 85°C. Thanks to the atmospheric boiler, mixing of mains water in the rinse phase is avoided. The PLUS system also ensures greater control and correct dosing of rinse aid in each cycle.



Fully molded basin. Independent stainless steel wash/rinse arms