

## GAS BAIN-MARIE - TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1017849

MODELLO  
Q90BM/G410

SERIE  
QUEEN 9

### GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



### TECHNICAL SPECIFICATIONS

#### Gas version

Stabilized flame burners regulated by thermostatic valves.

Piezoelectric ignition.

#### Electric version

Heated by armored heating elements placed outside the tank.

Control thermostat.

#### Different GN tray combinations

Examples:

M40: 1xGN1/3 + 1xGN 1/1 TANK

M80: 2xGN1/3 + 2xGN 1/1 TRAY

Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

## GAS BAIN-MARIE - TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1017849**

MODELLO  
**Q90BM/G410**

SERIE  
**QUEEN 9**

### Technical Information

SPECIFICATION	DATA
MATERIAL	CR1017849
DEFINITION	Q90BM/G410 BAGNOMARIA GAS M40 TOP
COMMERCIAL LINE	QUEEN
SUPPLY	GAS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
NET WEIGHT	51.8 Kg
VOLUME (net)	0.09
PACKAGE LENGTH	460 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,267 m3
GROSS PACKING WEIGHT	60 Kg
GAS POWER	3
GAS POWER (G25.3/25mbar)	2,80
CAPACITY	1 x Gn 1/3
	+
	1 x Gn 1/1
CERTIFIED MODEL	Q90BM/G410

GAS BAIN-MARIE - TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1017849

MODELLO  
Q90BM/G410

SERIE  
QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - INSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

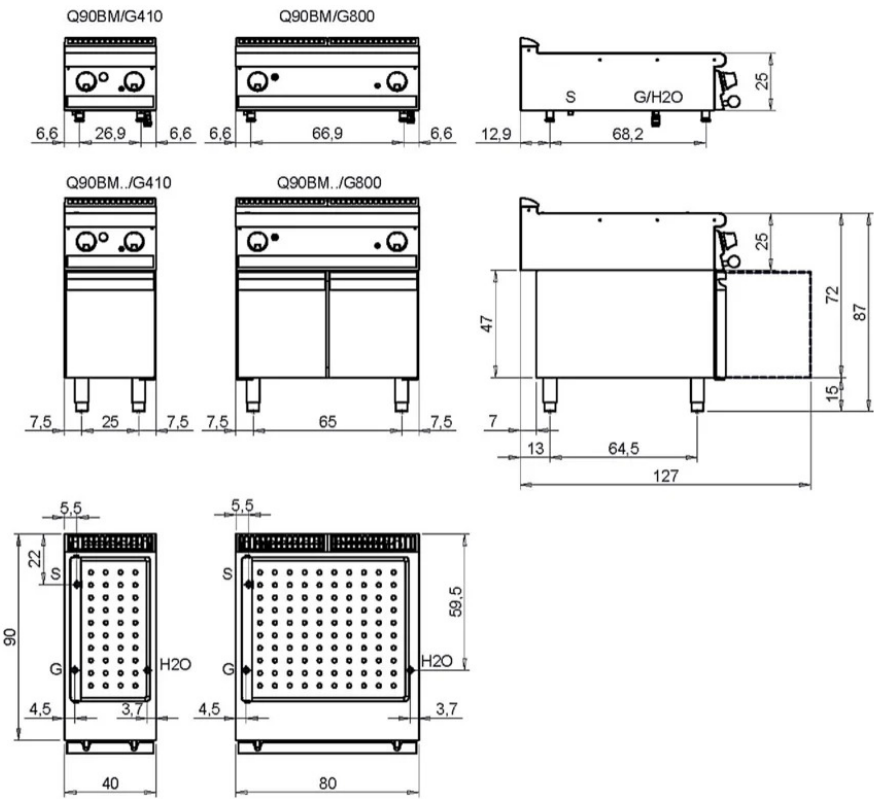

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
<b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás <b>EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)</b>
<b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Waterafropaansluiting - Junção descarga água <b>EN 10226-1 R 1/2</b>	<b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água <b>EN ISO 228-1 G 1/2</b>
<b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	<b>A1 =</b> Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno <b>A2 =</b> Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
<b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	
<b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
<b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftrapbuis - Tubulação de dreno	<b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível

# PRODUCT'S RANGE PLUS



Adjustable temperature in tank with overflow and perforated false bottom for supporting containers. GN-sized tank.



Integrated water dispenser in tank



Different GN basin combinations  
Examples:  
M40: 1xGN1/3 + 1xGN 1/1 TANK  
M80: 2xGN1/3 + 2xGN 1/1 TANK