

# ELECTRIC BOILING PAN INDIRECT HEATING - 50 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356179

MODELLO  
Q70NP/EI650S

SERIE  
QUEEN 7

## GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs. As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



## TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with 2 mm thickness

AISI 304 stainless steel tanks with AISI 316 bottom.

Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.

Frontal drain by means of 2" chrome-plated brass faucet.

Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).

Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.

Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Stainless steel tank with aisi 317 bottom

Possibility of hot or cold water loading

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

# ELECTRIC BOILING PAN INDIRECT HEATING - 50 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356179

MODELLO  
Q70NP/EI650S

SERIE  
QUEEN 7

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356179
DEFINITION	Q70NP/EI650 S PEN. ELE M60 IND.C/VAL 50L
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	600 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	870 mm
NET WEIGHT	77.8 Kg
VOLUME (net)	0.365
PACKAGE LENGTH	660 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	0,645 m3
GROSS PACKING WEIGHT	90 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9.8 kW
IP GRADE	IPX4
CAPACITY	50 litri
CERTIFIED MODEL	Q70NP/EI650

ELECTRIC BOILING PAN INDIRECT HEATING - 50 L -  
WITH AUTOMATIC CONDENSATE DRAIN VALVE  
CAVITY

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1356179

MODELLO  
Q70NP/EI650S

SERIE  
QUEEN 7

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

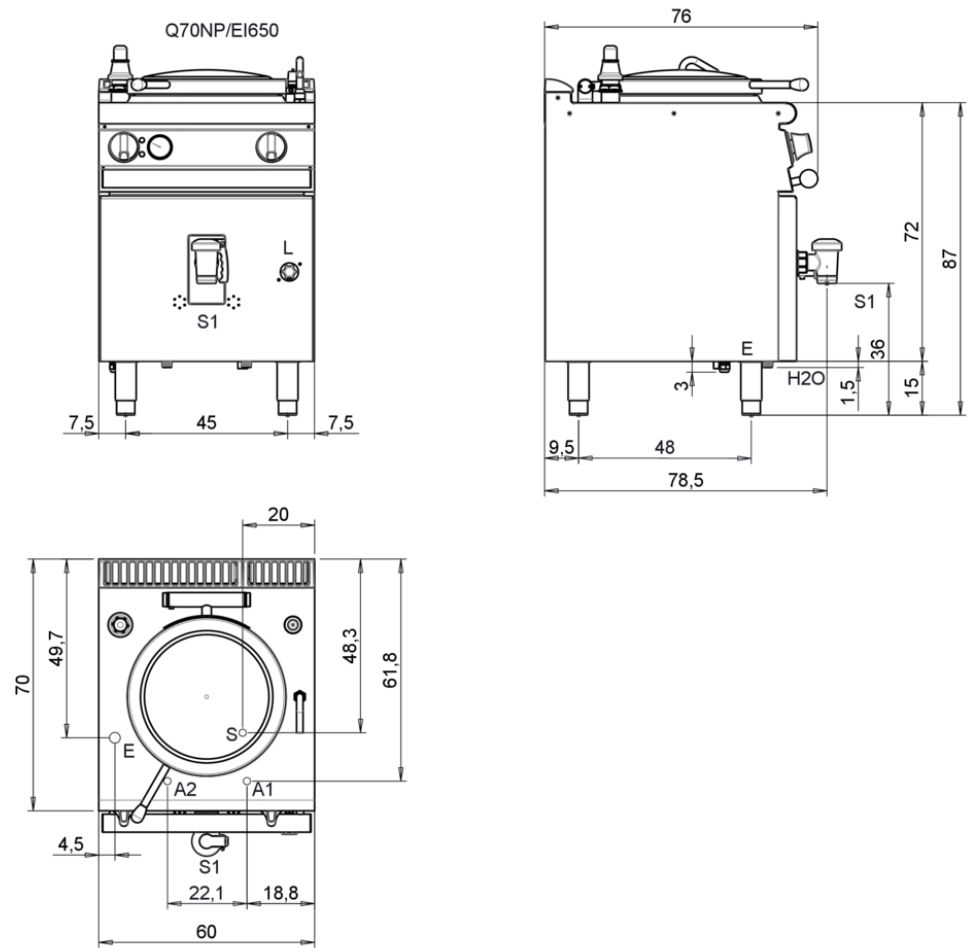

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
<b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	<b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
<b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água <b>EN ISO 228-1 G3/4</b>	<b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
<b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba <b>1 1/2"</b>	<b>A1</b> = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno <b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio <b>EN ISO 228-1 G3/4</b>
<b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresi3n - Onderdrukklep - Válvula de depress3o	
<b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interst3cios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	
<b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulaç3o de dreno	<b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível

# ELECTRIC BOILING PAN INDIRECT HEATING - 50 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356179

MODELLO  
Q70NP/EI650S

SERIE  
QUEEN 7

## PRODUCT'S RANGE PLUS



Indirect pot drain valve.  
The valve has a dual function  
- recharges the pressure inside the  
cavity  
- allows automatic water  
condensate discharge



Stainless steel tank with aisi 316  
bottom



Possibility of hot or cold water  
loading

# ELECTRIC BOILING PAN INDIRECT HEATING - 50 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE CAVITY

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1356179**

MODELLO  
**Q70NP/El650S**

SERIE  
**QUEEN 7**

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	<b>9C5</b>	COLANDER BASKET
MA97348000	<b>9CV5</b>	VEGETABLE STRAINER BASKET FOR POT
CR0599730	<b>7C8</b>	COLAPASTA BASKET - 80 Lt. HOLES Ø 3 MM - 1 SECTOR
CR0599740	<b>7CV8</b>	COOLING BOWL FOR POTS - 80 Lt. HOLES Ø 6 MM - 1 SECTOR
MA97349000	<b>9-I5</b>	POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM