

FRY TOP S Electric M80 AISI Plate - 1/3 RIBBED - thermostat - on open cabinet

Project
Rev.:
Zone:
Location:



CODICE
CR1655159T4W

MODELLO
QT90SFTV/E823-T4W

SERIE
BARON 4.0

GENERAL CHARACTERISTICS

From the solid foundation of Baron tradition, comes the new Queen 4.0 kitchen, even more practical, more accessorized, more technological.

An evolution in the field of professional kitchens.

Queen 4.0 is perfectly designed in detail to speed up and simplify every task of preparation, cooking, tidying up, and cleaning in the kitchen, and stand by you every day as a true ally in your work.



TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Baking plate 15 mm thick totally independent of the top.

Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer.

Cooking plates made with satin-finished surface and surface coated with soft iron, AISI430 steel or polished hard chrome, all available in smooth mixed or ribbed.

Large grease collection drawer.

Module sizes: 40,60,80

In the 120-width modules, the cooking plate is lowered from the top by 40 mm and tilted 10 mm toward the front of the machine.

Electric version: heating by incoloy armored heating elements.

Cooking temperature controlled thermostatically and adjustable from 110 to 280°C.

Safety thermostat.

Large fat collection drawer with capacity of the entire volume of the perimeter channel

Grooved plate design ensures cleanliness right to the end of the plate

Plate not welded to the machine bed with optimisation of structural points under thermal stress

Plate not welded to the machine bed with optimisation of structural points under thermal stress

Thermal cutting that facilitates the user and adjacent machinery.

Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.

Water dispenser kit available as an accessory

FRY TOP S Electric M80 AISI Plate - 1/3 RIBBED - thermostat - on open cabinet

Project
Rev.:
Zone:
Location:



CODICE
CR1655159T4W

MODELLO
QT90SFTV/E823-T4W

SERIE
BARON 4.0

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1655159T4W
DEFINITION	QT90SFTV/E823-T4W FTE 1/3R 430 M80 A/G
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	22 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	450 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	570 mm
PACKAGE VOLUME	0,218 m3
GROSS PACKING WEIGHT	29 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	15 kW
IP GRADE	IPX5
CERTIFIED MODEL	Q90SFTV/E823

FRY TOP S Electric M80 AISI Plate - 1/3 RIBBED - thermostat - on open cabinet

CODICE
CR1655159T4W


MODELLO
QT90SFTV/E823-T4W

SERIE
BARON 4.0

Project
Rev.:
Zone:
Location:



MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

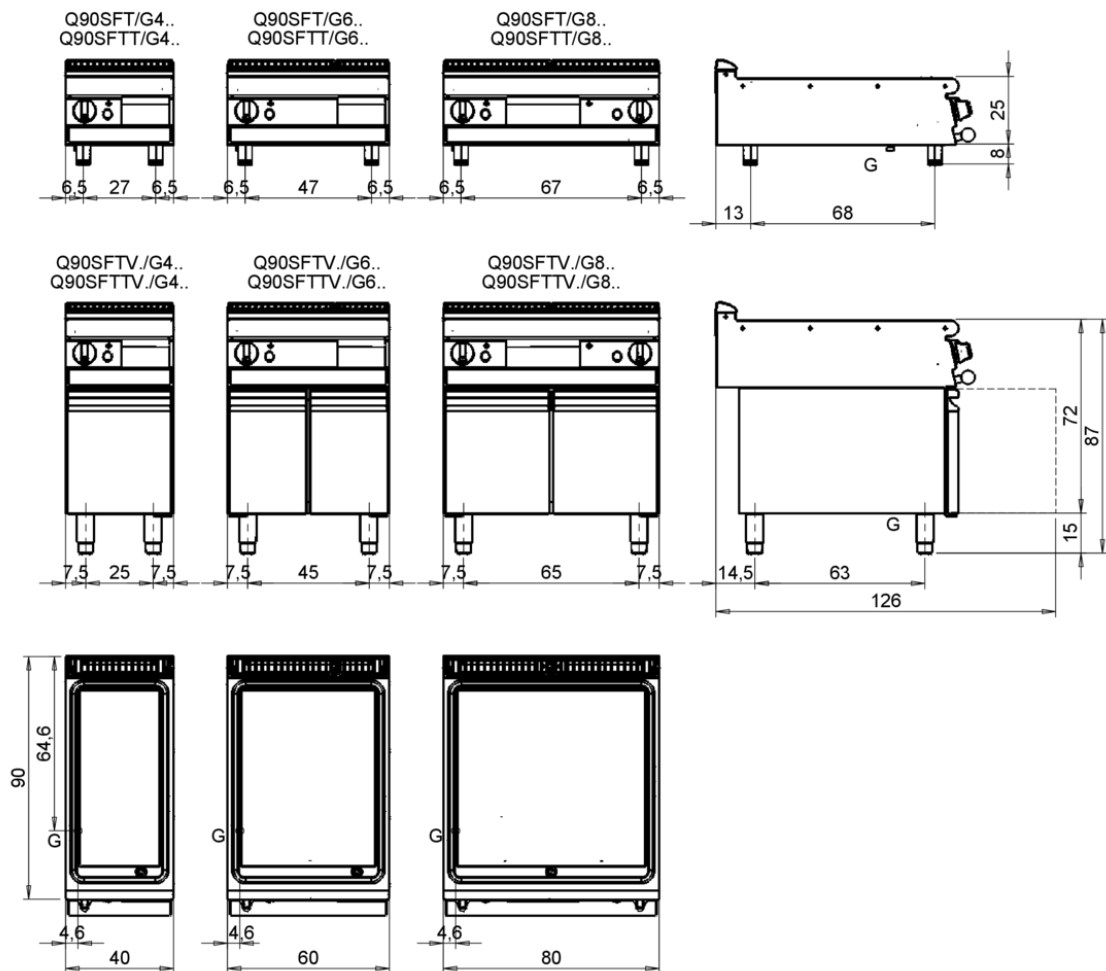

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresi3n - Onderdrukklep - Válvula de depress3o	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interst3cios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulaç3o de dreno	

FRY TOP S Electric M80 AISI Plate - 1/3 RIBBED - thermostat - on open cabinet

Project
Rev.:
Zone:
Location:



CODICE
CR1655159T4W

MODELLO
QT90SFTV/E823-T4W

SERIE
BARON 4.0

PRODUCT'S RANGE PLUS



Available as an accessory, the continuous discharge tube allows waste to be disposed of in an external receptacle.



Power level control via touch screen and adjustment with ergonomic knob



Industry 4.0 ready version.



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.



Grooved plate design ensures cleanliness right to the end of the plate



Thermal cutting that facilitates the user and adjacent machinery.



Non-welded plate to speed up maintenance and possible replacement in utilities.



Water dispenser kit available as an accessory

FRY TOP S Electric M80 AISI Plate - 1/3 RIBBED - thermostat - on open cabinet

Project
Rev.:
Zone:
Location:



CODICE
CR1655159T4W

MODELLO
QT90SFTV/E823-T4W

SERIE
BARON 4.0

PRODUCT'S RANGE PLUS



Uniform cooking temperature across the entire plate. Optimising heat in the cooking area and increasing operator comfort in the kitchen.



Capacious grease collection drawer with capacity of the entire volume of the perimeter channel.



Stainless steel overflow plug provided as standard for gutter flooding management.



Plate not welded to the machine table with optimization of structural points subjected to thermal stress.



Predisposition for core probe, for even greater cooking control. Reaching the set core temperature is signalled by an acoustic signal.



Floodable gutter for collecting cooking residue all around the perimeter of the plate easier cleaning, and better moisture retention of cooking food.

FRY TOP S Electric M80 AISI Plate - 1/3 RIBBED - thermostat - on open cabinet

Project
Rev.:
Zone:
Location:



CODICE
CR1655159T4W

MODELLO
QT90SFTV/E823-T4W

SERIE
BARON 4.0

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1354989	PRPC	Smooth plate cleaning scraper - chrome-plated
CR1356399	RPR	Striped chrome plate scraper
CR1658619	97CPFT4	M40 fry top cleaning drawer
CR1658609	97TFT	Plancha cleaning cap
CR1357499	4.0IOTPRO	PRO Subscription - Cloud
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud
CR1354999	PKLR	Replacement blades (10PCS)
CR1658689	9AFT8	M80 splash guard
CR1658849	Q7968CAF	WATER LOADING FOR FRY TOP M60 M80 - 70 90 QUEEN - GAS OR ELECTRIC
CR1658939	Q98EKSCFT	CONTINUOUS DRAIN FOR FRY TOP M80 - 90 QUEEN - ELECTRIC
CR1658969	Q98ECASCFT	LOAD + CONTINUOUS SCAR.FOR FRY TOP M80 - 90 QUEEN - ELECTRIC