

ELECTRIC DIRECT STEAM COMBINATION OVEN - 10 X  
1/1 GN - 10 X 600 X 400 ELECTROMECHANICAL  
CONTROLS

CODICE CR1488631	MODELLO HOEM101E	SERIE Horizon III
---------------------	---------------------	----------------------

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



GENERAL CHARACTERISTICS

HORIZON III - Professional oven for catering.  
Perfectly smooth and airtight baking chamber with rounded edges.  
Closing door with double tempered, air gap glass and heat-reflective inner glass for less heat radiation to the operator and greater efficiency.  
Inner glass with folding opening for easy cleaning operation.  
Opening baffle for easy cleaning operation of the fan on open cabinet.  
Adjustable door hinges for optimal sealing.



TECHNICAL SPECIFICATIONS

The control panel of the manual oven consists of selectors and knobs with an ergonomic design that makes it easy to use and intuitive. Functions are controlled by electromechanical controls, while indicator lights provide feedback on oven operation clearly and immediately.

COOKING MODE: Manual cooking with three cooking modes: Convection from 50°C to 260°C, Steam from 50°C to 130°C, Combined from 50°C to 260°C.

OPERATION: Electromechanical selector control panel with operation control lights.

CONTROL FEATURES: Autoreverse (automatic reversal of fan rotation direction) for perfect cooking uniformity. Manual chamber venting. LED cooking chamber lighting. IPX3 protection against water jets.

CLEANING, ORDINARY MAINTENANCE: Manual washing system with external hand shower (hand shower optional).

ELECTRIC DIRECT STEAM COMBINATION OVEN - 10 X  
1/1 GN - 10 X 600 X 400 ELECTROMECHANICAL  
CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE CR1488631	MODELLO HOEM101E	SERIE Horizon III
---------------------	---------------------	----------------------

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1488631
DEFINITION	ICEM101E MISTO EL.10T C/MEC.
COMMERCIAL LINE	ICON E
SUPPLY	ELECTRICS
DIM. WIDTH	812 mm
DIM. PRODUCTIVITY	725 mm
DIM. HEIGHT	1145 mm
NET WEIGHT	108 Kg
VOLUME (net)	0.674
PACKAGE LENGTH	870 mm
PACKAGE WIDTH	910 mm
PACKAGING HEIGHT	1370 mm
PACKAGE VOLUME	1,085 m3
GROSS PACKING WEIGHT	122 Kg
STANDARD POWER SUPPLY	3NAC400V/3AC230V 50Hz
ELECTRICAL POWER	14.5 kW
GAS/REFRIGERANT TYPE	NO GAS
IP GRADE	IPX3
CERTIFIED MODEL	HOEM101E

# ELECTRIC DIRECT STEAM COMBINATION OVEN - 10 X 1/1 GN - 10 X 600 X 400 ELECTROMECHANICAL CONTROLS


Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1488631

MODELLO  
HOEM101E

SERIE  
Horizon III

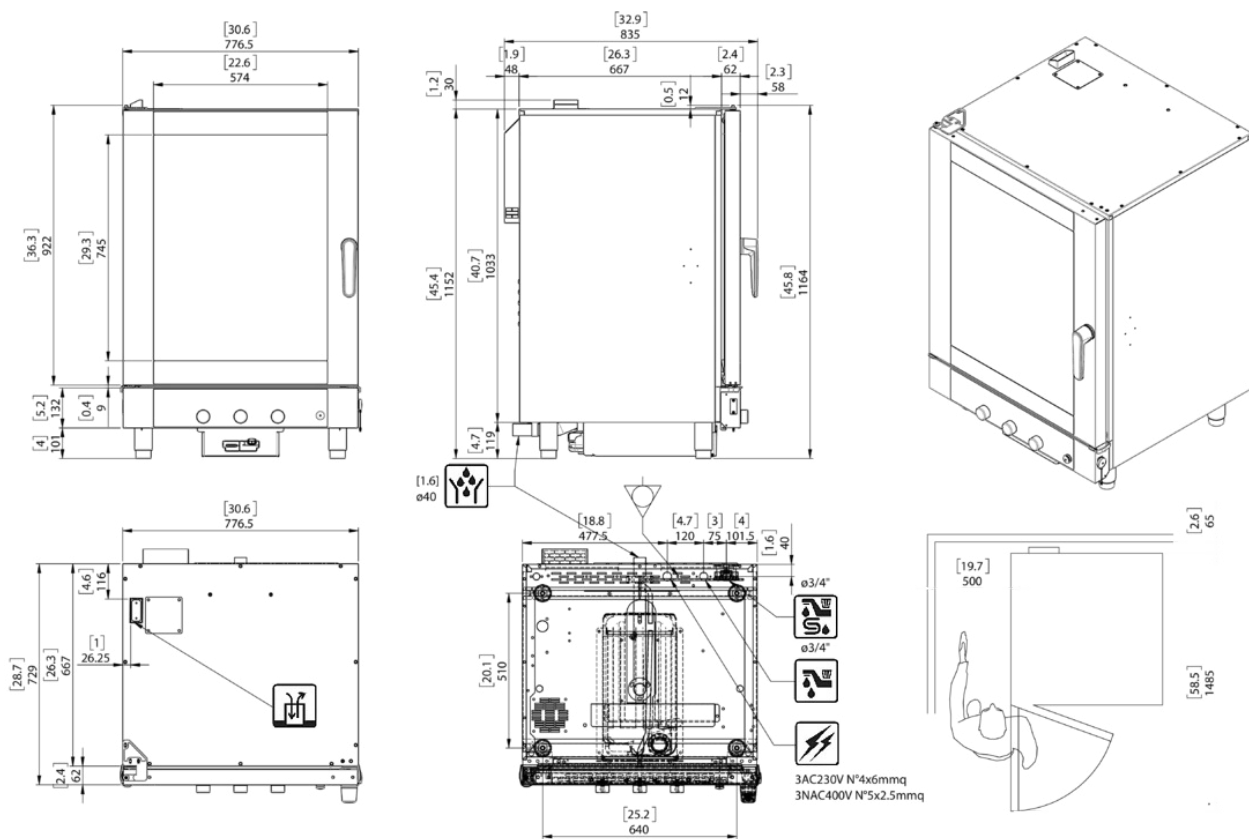

Dimensions: Millimeters [inches]

ICET101E/ICEM101E

I dati riportati sul presente documento sono da ritenersi non vincolanti. L'azienda si riserva di apportare modifiche tecniche in qualsiasi momento.  
The specification shown in this document are to be considered non binding. The company reserves the right to make technical change at any moment.  
Die auf diesem Unterlage angegebenen technischen Daten sind als unverbindlich anzusehen. Die Firma behält sich das Recht vor zu jeder Zeit technische Änderungen vorzunehmen.  
Les données techniques sur ce document ne doivent pas être considérées contraignantes. La société se réserve le droit d'apporter des modifications techniques à tout moment.  
Los datos técnicos indicados en el presente catálogo no son vinculantes. La empresa se reserva el derecho de efectuar modificaciones sin previo aviso.

# ELECTRIC DIRECT STEAM COMBINATION OVEN - 10 X 1/1 GN - 10 X 600 X 400 ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1488631**

MODELLO  
**HOEM101E**

SERIE  
**Horizon III**

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
IKKV51S	<b>IKKV51S</b>	EXTRACTION HOOD WITH AIR-COOLED CONDENSER FOR STACKING KIT. PREARRANGED ELECTRIC MODELS ONLY
RP04	<b>RP04</b>	SET OF CASTORS FOR STANDS, 2 OF WHICH WITH BRAKES
NPT071	<b>NPT071</b>	TRAY HOLDER - INSERTABLE ON 45 MM CENTRE DISTANCE SUPPORT
NPT064	<b>NPT064</b>	TRAY HOLDER - INSERTABLE ON STAND
NPF04	<b>NPF04</b>	FLANGED FEET KIT FOR SUPPORTS, FOR NAVAL INSTALLATIONS
KIPS101E	<b>KIPS101E</b>	KIT FOR OPPOSITE HINGED DOOR
KFP002	<b>KFP002</b>	FOOT STOPPER KIT
ISR101E	<b>ISR101E</b>	STAINLESS STEEL BASE SUPPORT
IKKV51	<b>IKKV51</b>	FUME HOOD WITH AIR CONDENSER
IGP864	<b>IGP864</b>	PAIR OF BULKHEADS - 600 X 400
IGP116	<b>IGP116</b>	PAIR OF SHELF RACKS - GN - 600 X 400
ICLD	<b>ICLD</b>	HAND SHOWER COMPLETE WITH FITTINGS AND CONNECTIONS
ICFX02	<b>ICFX02</b>	FAT FILTER - 2pcs
IBAS051	<b>IBAS051</b>	SHATTERPROOF BAR
PCSM	<b>PCSM</b>	FLOWMETER 10-100
PCSK	<b>PCSK</b>	PURITY C STEAM FILTER HEAD KIT
PCSF	<b>PCSF</b>	PURITY C STEAM 1100 CARTRIDGE
CCE	<b>CCE</b>	HOOD MANIFOLD FOR EXTERNAL CONNECTION - Ø 150 MM
PLG5032	<b>PLG5032</b>	PLUG - 380 V - 32A - 5P
CBL0540	<b>CBL0540</b>	CABLE - 3 MT - 5 X 4 MMQ
RP004	<b>RP004</b>	WHEEL SET OF WHICH 2 WITH BRAKE












ELECTRIC DIRECT STEAM COMBINATION OVEN - 10 X  
1/1 GN - 10 X 600 X 400 ELECTROMECHANICAL  
CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE CR1488631	MODELLO HOEM101E	SERIE Horizon III
---------------------	---------------------	----------------------

OPTIONAL

MODELLO	DESCRIZIONE
 NPK	PREARRANGEMENT FOR SUCTION HOOD CONNECTION
ISP864	SUPPLEMENT FOR BAKERY VERSION IGP-864 TRAY HOLDER BULKHEAD
IPS101	OPPOSITE DOOR
 SN	ENERGY OPTIMIZATION SUPPLEMENT. FOR ELECTRIC MODELS ONLY
 APDS	SECURITY DOOR OPENING WITH DOUBLE CLICK
 TS-ICE-101E-F50	3-AC 480 V - 50 HZ
 TS-ICE-101E-E50	3N-AC 440 V - 50 HZ
 TS-ICE-101E-D50	3-AC 440 V - 50 HZ
 TS-ICE-101E-C50	3-AC 400 V - 50 HZ
 TS-ICE-101E-F60	3-AC 480 V - 60 HZ
 TS-ICE-101E-E60	3N-AC 440 V - 60 HZ
 TS-ICE-101E-D60	3-AC 440 V - 60 HZ
 TS-ICE-101E-C60	3-AC 400 V - 60 HZ