

REFRIGERATED COUNTER GN 1/1 (3 DOORS TEMP -15/-20°C)

Project
Rev.:
Zone:
Location:



CODICE
BN26KK502210376

MODELLO
BOKBT03

SERIE
**REFRIGERATED
TABLES**

GENERAL CHARACTERISTICS

Baron refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed delicatessen products, thanks also to an automatic door closing system with magnetic gasket.



TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fuller telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

REFRIGERATION UNIT

Evaporators positioned behind each door pillar to ensure uniform cold distribution

Evaporators with treatment in cataphoresis

CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Hot gas defrost system (onboard motor versions)

Electric defrost (on predisposed versions)

Automatic evaporation device for condensate water without the need for electrical energy

REFRIGERATED COUNTER GN 1/1 (3 DOORS TEMP -15/-20°C)

Project
Rev.:
Zone:
Location:



CODICE
BN26KK502210376

MODELLO
BOKBT03

SERIE
REFRIGERATED
TABLES

Technical Information

SPECIFICATION	DATA
MATERIAL	BN26KK502210376
SUPPLY	ELECTRICS
DIM. WIDTH	1730 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	810 mm
NET WEIGHT	105 Kg
VOLUME (net)	0.98091
PACKAGE LENGTH	1780 mm
PACKAGE WIDTH	750 mm
PACKAGING HEIGHT	1060 mm
PACKAGE VOLUME	1,415 m3
GROSS PACKING WEIGHT	122 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50Hz
ELECTRICAL POWER	0.73 kW
GAS/REFRIGERANT TYPE	R452a
IP GRADE	IPX4
CAPACITY	369

REFRIGERATED COUNTER GN 1/1 (3 DOORS TEMP -15/-20°C)


Project
Rev.:
Zone:
Location:



CODICE
BN26KK502210376

MODELLO
BOKBT03

SERIE
REFRIGERATED
TABLES

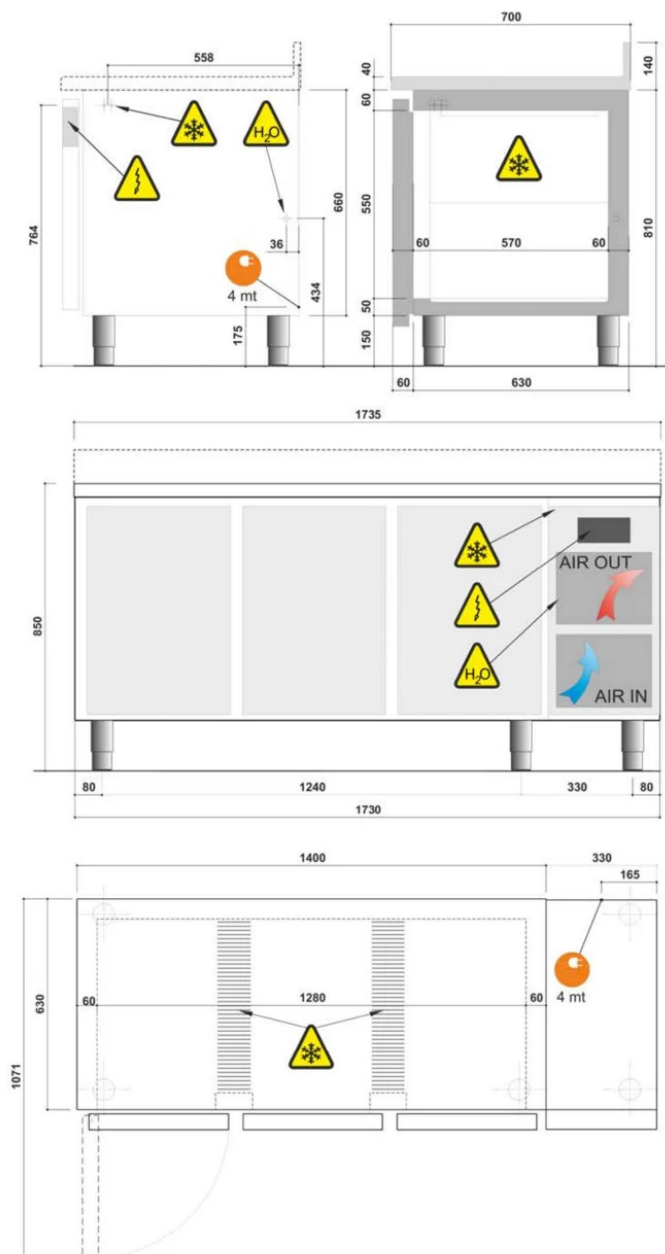

**OK 3 DOORS
GASTRONORM H 660**
REFRIGERATED COUNTERS
KÜHLTISCHE / TAVOLI REFRIGERATI
TABLES REFRIGEREES
MESAS REFRIGERADA
GEKOELDE WERKBANKEN
ОХЛАЖДЕННЫЕ ПРИЛAVКИ

-  4 mt Power cable position & length / Position und Länge des Speisekabels / Posizione e lunghezza cavo alim.
-  Refrigerant tubes / Kälteleitungen / Tubi refrigeranti
-  Drainage pipe / Ablaufrohr / Tubo scarico
-  Electrical components position / Position der elektrischen Komponente / Posizione componenti elettrici

REFRIGERATED COUNTER GN 1/1 (3 DOORS TEMP -15/-20°C)

Project
Rev.:
Zone:
Location:



CODICE
BN26KK502210376

MODELLO
BOKBT03

SERIE
REFRIGERATED
TABLES

PRODUCT'S RANGE PLUS



Evaporators placed behind each door pillar to ensure uniformity in cold distribution.



Ease of programming and immediate accessibility. The solution for quick and easy use.



Capacitor protected by filters to ensure optimal operation over time.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



Full extension drawers with special Filterer stainless steel telescopic slides