

ECO WASH PLUS T CANOPY - BPEW11D

Project
Rev.:
Zone:
Location:



CODICE
BND212050

MODELLO
BPEW11D

SERIE
WASHING

GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



TECHNICAL SPECIFICATIONS

Glass and dishwashers, ideal for bars, pubs, restaurants and hotels. These front-loading undercounter dishwashers, with an attractive design thanks to the redesigned electromechanical control panel, offer a large load capacity and guarantee maximum performance at an affordable price.

The many options available such as softener, detergent dispenser and drain pump allow the machine to be customised to the user's needs.

ECO WASH PLUS T CANOPY - BPEW11D

Project
Rev.:
Zone:
Location:



CODICE
BND212050

MODELLO
BPEW11D

SERIE
WASHING

Technical Information

| SPECIFICATION | DATA |
|-----------------------|---------------------------------|
| MATERIAL | BND212050 |
| DEFINITION | BPEW11D LAVAST.CAPOTTA MEC. 500 |
| DIM. WIDTH | 720 mm |
| DIM. PRODUCTIVITY | 735 mm |
| DIM. HEIGHT | 1445 mm |
| NET WEIGHT | 100 Kg |
| PACKAGE LENGTH | 760 mm |
| PACKAGE WIDTH | 840 mm |
| PACKAGING HEIGHT | 1500 mm |
| PACKAGE VOLUME | 0,958 m3 |
| GROSS PACKING WEIGHT | 116 Kg |
| STANDARD POWER SUPPLY | 380-415V 3N |
| ELECTRICAL POWER | 10.2 kW |
| BASKET SIZE | 500x500 mm |
| WASH CYCLES | 50/80/120/180 sec |
| WASH PUMP | 900W |
| WATER CONSUMPTION | 2,8 lt |

ECO WASH PLUS T CANOPY - BPEW11D



Project
Rev.:
Zone:
Location:



CODICE
BND212050

MODELLO
BPEW11D

SERIE
WASHING

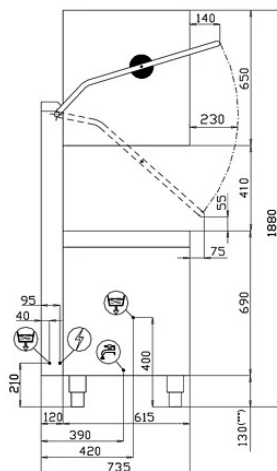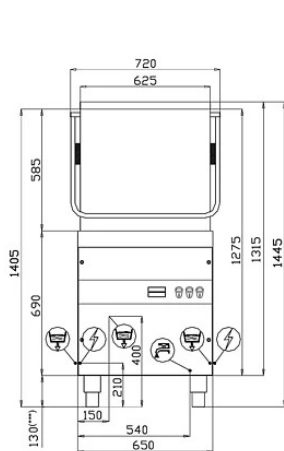

| | |
|--|-------------------------|
| | ENTRATA ACQUA 3/4" GAS |
| | SCARICO ACQUA Ø 24mm |
| | ALLACCIAMENTO ELETTRICO |

(***) MIN 130-MAX 200

| DATI TECNICI | | |
|---|------------------------------------|---------|
| DIMENSIONI ESTERNE | | |
| larghezza | 720 mm | |
| profondita' | 735 mm | |
| altezza(piedino avvitato) | 1445/1880(capotta aperta) mm | |
| PESO (versione base) | 100 kg | |
| TENSIONE DI ALIMENTAZIONE | 400V 3N 50Hz | |
| POTENZA MASSIMA ASSORBITA | 10120 W | |
| DUREZZA ACQUA | 2-8 °F | |
| PRESSIONE ACQUA ALIMENTAZIONE | 200-400 kPa | |
| ALTEZZA UTILE & CESTI | | |
| diametro piatti | 410 mm | |
| vassoi | GASTRONORM 1/1 (530x325) | |
| DIMENSIONE CESTI | 500X500 mm | |
| DOTAZIONE CESTI | 2XC40 - 1XC44 - 2X15060 | |
| N° CICLI (sec) | 1 (50) | 2 (120) |
| ALIMENTAZIONE ACQUA 55°C | | |
| produzione cesti(*) ⁽¹⁾ Cesti/h | 70 | 30 |
| ALIMENTAZIONE ACQUA 10°C | | |
| produzione cesti(*) ⁽¹⁾ Cesti/h | 34 | 30 |
| CONSUMO ACQUA PER CICLO (pressione idrica 200kPa) | 2.8 L | |
| CAPACITA' BOILER | 10 L | |
| RESISTENZA BOILER | 9000 W | |
| SET. TEMPERATURA RISCIAQUO | 85°C | |
| CAPACITA' VASCA | 30 L | |
| RESISTENZA VASCA | 2700 W | |
| SET. TEMPERATURA VASCA | 55°C | |
| POTENZA POMPA | 1120 W(630 L/min***) | |
| pompa scarico (optional) | 25W h MAX scarico 0,8m(40L/min***) | |
| RUMOROSITA' | 63,6±0.7 dB(A) | |

(*) CON TERMOSTOP DI SERIE

(***) PORTATA MASSIMA

(1) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1

ECO WASH PLUS T CANOPY - BPEW11D

Project
Rev.:
Zone:
Location:



CODICE
BND212050

MODELLO
BPEW11D

SERIE
WASHING

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|--------|---------|----------------------------|
| CEWPS | CEWPS | DRAIN PUMP FOR COWL WASHER |
| CEWDDE | CEWDDE | DETERGENT DISPENSER |