

Multifunction Blast Chiller 5 GN1/1 +90°C / -40°C

Project
Rev.:
Zone:
Location:



CODICE
BN2ABD050335

MODELLO
BGL05

SERIE
MULTIFUNCTION

GENERAL CHARACTERISTICS

Work is easier thanks to the intuitive graphics of the user interface, designed to simplify access to functions, which are represented to be immediately identified and to encourage interaction between the user and the device.

In a single machine, a concentration of technology that will enable it to perform different and complementary for the best efficiency in the kitchen: in this way it will be immediately operational, without starting any complex procedure also thanks to 300 working processes and cycles.



TECHNICAL SPECIFICATIONS

Multifunction blast chiller with combinable cycles

GAS R290

Full Touch 7-inch Display

T° Range +90°C / -40°C

190 preloaded recipes

More than 20 pre-loaded combined cycles

Infinite combination of functions in combined work cycles

Bidirectional IOT 4.0 connectivity

0/100% humidity regulation with instant steam generator

Sanitation with combined IONS / STEAM cycle (Optional)

Wifi connection

Electronic fans

Thermostatic valve

Body entirely in AISI 304 steel

Newly developed scroll compressors

Multifunction Blast Chiller 5 GN1/1 +90°C / -40°C

Project
Rev.:
Zone:
Location:



CODICE
BN2ABD050335

MODELLO
BGL05

SERIE
MULTIFUNCTION

Technical Information

SPECIFICATION	DATA
MATERIAL	BN2ABD050335
SUPPLY	ELECTRICS
DIM. WIDTH	790 mm
DIM. PRODUCTIVITY	885 mm
DIM. HEIGHT	850 mm
NET WEIGHT	86 Kg
PACKAGE LENGTH	990 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	995 mm
STANDARD POWER SUPPLY	220-240V 1N
ELECTRICAL POWER	2.1 kW
GAS/REFRIGERANT TYPE	R290
REFRIGERATION POWER	2002
CELL SIZE	608x400x370
CAPACITY	Lt. 109

Multifunction Blast Chiller 5 GN1/1 +90°C / -40°C


Project
Rev.:
Zone:
Location:



CODICE
BN2ABD050335

MODELLO
BGL05

SERIE
MULTIFUNCTION

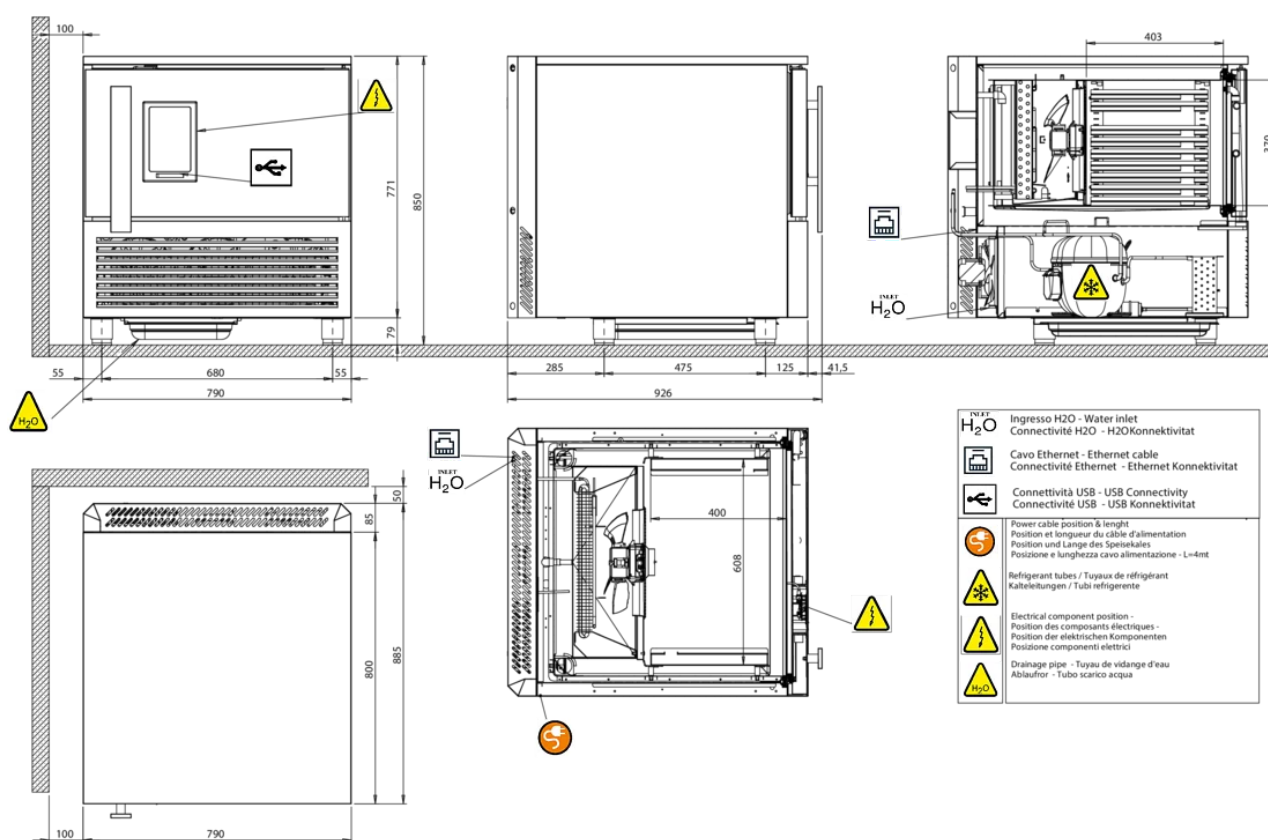

	Ingresso H ₂ O - Water inlet Connectivité H ₂ O - H ₂ O Konnektivität
	Cavo Ethernet - Ethernet cable Connectivité Ethernet - Ethernet Konnektivität
	Connectivité USB - USB Connectivity Connectivité USB - USB Konnektivität
	Power cable position & length Position et longueur du câble d'alimentation Position und Länge des Speisekables Posizione e lunghezza cavo alimentazione - L=4mt
	Refrigerant tubes / Tuyaux de réfrigérant Kälteleitungen / Tubi refrigerante
	Electrical component position - Position des composants électriques - Position der elektrischen Komponenten Posizione componenti elettrici
	Drainage pipe - Tuyau de vidange d'eau Abflaßrohr - Tubo scarico acqua

Multifunction Blast Chiller 5 GN1/1 +90°C / -40°C

Project
Rev.:
Zone:
Location:




CODICE
BN2ABD050335

MODELLO
BGL05

SERIE
MULTIFUNCTION

PRODUCT'S RANGE PLUS




Sanitation with combined IONS /
STEAM cycle



0/100% humidity regulation with
instant steam generator



pasteurisation, professionally at all
conservation levels, giving you the
opportunity of pasteurising and
cooling the products, in full
compliance with the safety
regulations



Low temperature, Ideal for
nocturnal processes, cooks your
products at low temperature, in total
respect of their properties.



Thanks to the R290 gas supplied as
standard for all available versions,
Olis guarantees care and
sustainability in all aspects of its
product development.



Multilevel probe with 4 reading
points to give you absolutely
reliable data.