

# ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVED AISI 430 TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1350639T4W

MODELLO  
QT90FT/E1223-T4W

SERIE  
BARON 4.0

## GENERAL CHARACTERISTICS

From the solid foundation of Baron tradition, comes the new Queen 4.0 kitchen, even more practical, more accessorized, more technological.

An evolution in the field of professional kitchens.

Queen 4.0 is perfectly designed in detail to speed up and simplify every task of preparation, cooking, tidying up, and cleaning in the kitchen, and stand by you every day as a true ally in your work.



## TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Baking plate 15 mm thick totally independent of the top.

Large floodable channel around the perimeter of the hotplate for collecting cooking residues, sloping towards the front for draining liquids into the large drawer.

Cooking plates made with satin-finished surface and surface coated with soft iron, AISI430 steel or polished hard chrome, all available in smooth mixed or ribbed.

Large grease collection drawer.

Module sizes: 40,60,80

In the 120-width modules, the cooking plate is lowered from the top by 40 mm and tilted 10 mm toward the front of the machine.

Electric version: heating by incoloy armored heating elements.

Cooking temperature controlled thermostatically and adjustable from 110 to 280°C.

Safety thermostat.

Plate welded to the hob that provides a larger cooking zone and eliminates dirt accumulation areas.

Plate with armoured incoloy heating elements placed under the bottom for cooking with temperature uniformity.

AISI430 plate.

Data collection, operation monitoring, remote control are just some of the possibilities that connectivity puts at your disposal.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

# ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVED AISI 430 TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1350639T4W

MODELLO  
QT90FT/E1223-T4W

SERIE  
BARON 4.0

## Technical Information

| SPECIFICATION         | DATA         |
|-----------------------|--------------|
| MATERIAL              | CR1350639T4W |
| SUPPLY                | ELECTRICS    |
| DIM. WIDTH            | 120 mm       |
| DIM. PRODUCTIVITY     | 900 mm       |
| DIM. HEIGHT           | 250 mm       |
| STANDARD POWER SUPPLY | 380-415V 3N  |
| ELECTRICAL POWER      | 16.2 kW      |

ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVED  
AISI 430 TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1350639T4W

MODELLO  
QT90FT/E1223-T4W

SERIE  
BARON 4.0

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -  
ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

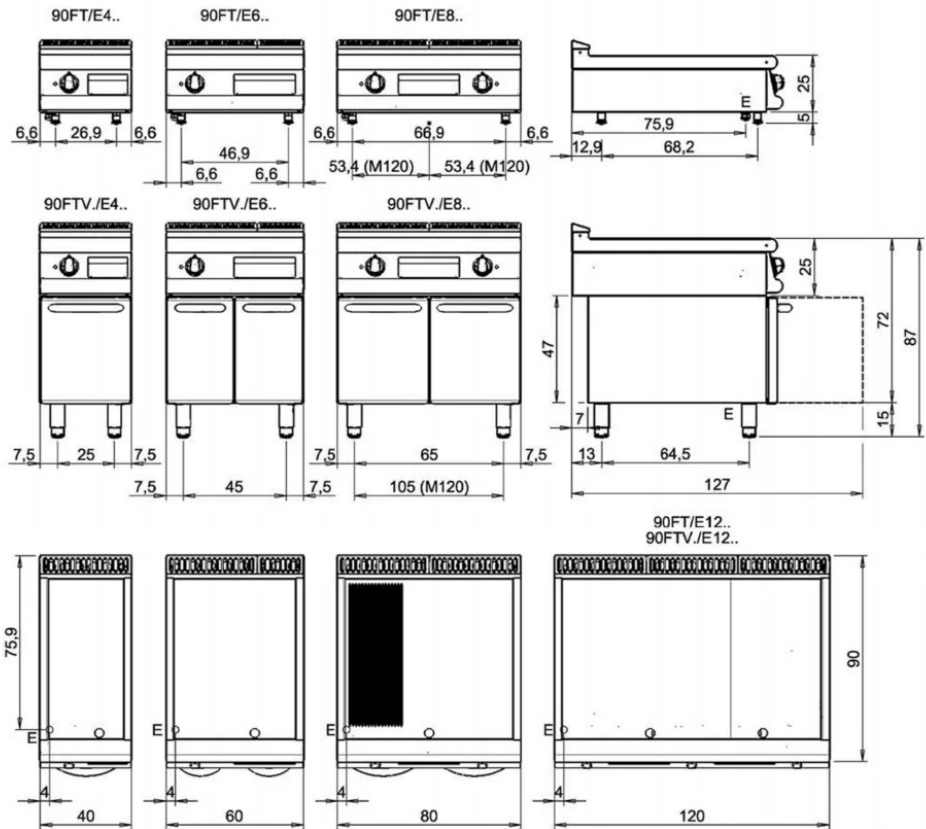

| Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda   |  |
|---|--|
| <b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisicable - Elektrische kabelwartel - Entrada cabo eléctrico   | <b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás                    |
| <b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água  | <b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água |
| <b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba  | <b>A1 =</b> Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno  |
| <b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventili - Soupape de dépression - Válvula de depresión - Onderdrukkelep - Válvula de depressão  | <b>A2 =</b> Fredda - Kalt - Cold - Froid - Fria - Koude - Frio   |
| <b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto |  |
| <b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno   | <b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível      |

# ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVED AISI 430 TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1350639T4W

MODELLO  
QT90FT/E1223-T4W

SERIE  
BARON 4.0

## PRODUCT'S RANGE PLUS



Available as an accessory, the continuous discharge tube allows waste to be disposed of in an external receptacle.



Power level control via touch screen and adjustment with ergonomic knob




Industry 4.0 ready version.



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.




Grooved plate design ensures cleanliness right to the end of the plate



Thermal cutting that facilitates the user and adjacent machinery.



Non-welded plate to speed up maintenance and possible replacement in utilities.



Water dispenser kit available as an accessory

Stainless steel overflow plug

# ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVED AISI 430 TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1350639T4W

MODELLO  
QT90FT/E1223-T4W

SERIE  
BARON 4.0

provided as standard for gutter  
flooding management.





Plate not welded to the machine  
table with optimization of structural  
points subjected to thermal stress.



Floodable gutter for collecting  
cooking residue all around the  
perimeter of the plate easier  
cleaning, and better moisture  
retention of cooking food.



Uniform cooking temperature  
across the entire plate. Optimising  
heat in the cooking area and  
increasing operator comfort in the  
kitchen.



Capacious grease collection drawer  
with capacity of the entire volume of  
the perimeter channel.



Predisposition for core probe, for  
even greater cooking control.  
Reaching the set core temperature  
is signalled by an acoustic signal.

# ELECTRIC FRY TOP PLATE 2/3 SMOOTH 1/3 GROOVED AISI 430 TOP VERSION

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1350639T4W

MODELLO  
QT90FT/E1223-T4W

SERIE  
BARON 4.0

## ACCESSORIES

| CODE      | MODELLO     | DESCRIZIONE                                   |
|-----------|-------------|---|
| CR0957610 | 90XFTP12    | SPLASH GUARD FOR FRY TOP MODULE 120           |
| CR0592079 | NXFTC4      | Fry top cleaning drawer M40-M120              |
| CR0592089 | NXFTC6/8    | Fry top cleaning drawer M40-M60-M80-M120      |
| CR1354989 | PRPC        | Smooth plate cleaning scraper - chrome-plated |
| CR1356399 | RPR         | Striped chrome plate scraper                  |
| CR1357499 | 4.0IOTPRO   | PRO Subscription - Cloud                      |
| CR1357479 | 4.0IOTENTRY | ENTRY Subscription - Cloud                    |
| CR1354999 | PKLR        | Replacement blades (10PCS)                    |
| CR0592060 | NXFTT       | PLANCHA CLEANING PLUG                         |