

GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON ELECTRIC OVEN

Project
Rev.:
Zone:
Location:



CODICE
CR1016339

MODELLO
Q90TPF/GE1201SX

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Polished cast iron plate with removable central disk.

High-power (14 kW) central burner with piezo ignition.

Differentiated thermal zones with maximum temperature at the center 500°C, decreasing toward the perimeter.

Safety tap with thermocouple and progressive regulation of power output.

Gas oven

Stainless steel cooking chamber (53x70x30cm), thermally insulated and equipped with 3 anti-tip guides for 1/1 and 2/1 reduced gastronorm containers.

Thick cast iron radiant sole for effective heat distribution.

Stainless steel door and counter door, perfectly insulated and mounted on self-balancing hinges.

Ergonomic full-length, thermally insulated handle.

Stabilized flame burner housed under the sole.

Pilot burner with piezoelectric and manual ignition.

Automatic valve with gas safety thermocouple.

Thermostatic temperature control from 110 to 330°C.

Electric oven

Groups of stainless steel heating elements placed on the ceiling and under the sole of the firing chamber.

Thermostatic temperature control in the chamber from 100°C to 300°C.

Various connection possibilities.

Warning light indicating "equipment under voltage."

Indicator light indicating that the set temperature has been reached.

A single high-efficiency central burner that results in differentiated heat zones on the floor with a concentration of maximum heat in the centre and decreasing temperatures in the peripheral zones.

Entirely moulded top made from thick stainless steel plate.

Enamelled cast-iron grills with long spokes for easy movement of pans between fires.

High power cast iron burners 3.5- 5.7- 7 and 10 kW.

Protected pilot flame with removable and easily washable protection.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON ELECTRIC OVEN

Project
Rev.:
Zone:
Location:



CODICE
CR1016339

MODELLO
Q90TPF/GE1201SX

SERIE
QUEEN 9

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1016339
DEFINITION	Q90TPF/GE1201SX TUTTAP.GAS+2F SX C/F ELE
COMMERCIAL LINE	QUEEN
SUPPLY	MIXED
DIM. WIDTH	1200 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	200 Kg
VOLUME (net)	0.94
PACKAGE LENGTH	0 mm
PACKAGE WIDTH	0 mm
PACKAGING HEIGHT	0 mm
PACKAGE VOLUME	1,500 m3
GROSS PACKING WEIGHT	211 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	6 kW
GAS POWER	24.5
GAS POWER (G25.3/25mbar)	24,00
N. FIRES/PLATES	DUE FUOCHI
IP GRADE	IPX4
CERTIFIED MODEL	Q90TPF/GE12SX

GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON
ELECTRIC OVEN

Project
Rev.:
Zone:
Location:




CODICE
CR1016339

MODELLO
Q90TPF/GE1201SX

SERIE
QUEEN 9

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

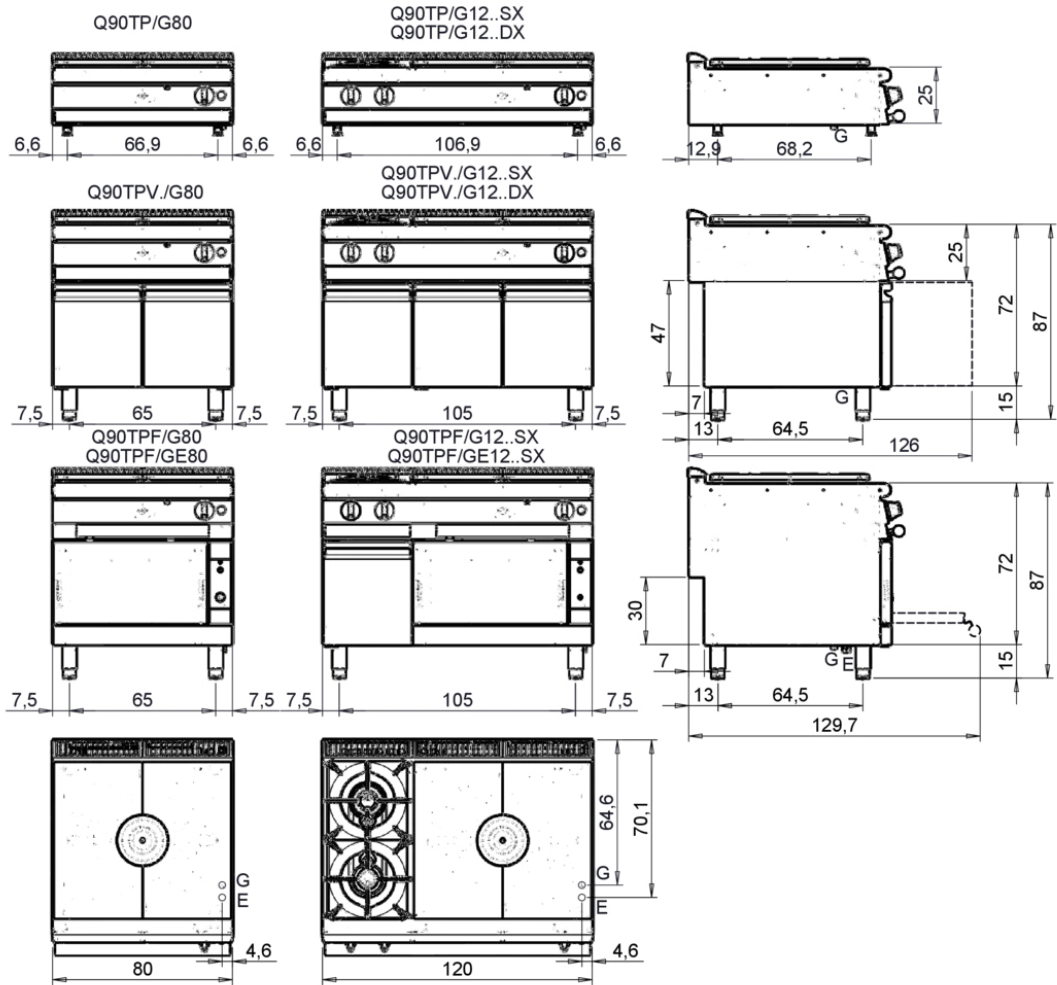

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água	H20 Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nível
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de água interstícios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	
S4 Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno	

GAS SOLID TOP WITH 2 BURNERS ON THE LEFT ON ELECTRIC OVEN

Project
Rev.:
Zone:
Location:



CODICE
CR1016339

MODELLO
Q90TPF/GE1201SX

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Thick top plate with removable
centre ring.



A single high-efficiency central
burner that results in differentiated
heat zones on the floor with a
concentration of maximum heat in
the centre and decreasing
temperatures in the peripheral
zones.