

# REFRIGERATED TABLE ( 2 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**BN26KK0002103LB**

MODELLO  
**BOK02PA**

SERIE  
**REFRIGERATED  
TABLES**

## GENERAL CHARACTERISTICS

Baron refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed delicatessen products, thanks also to an automatic door closing system with magnetic gasket.



## TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fullterer telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

### REFRIGERATION UNIT

Evaporators positioned behind each door pillar to ensure uniform cold distribution

Evaporators with treatment in cataphoresis

### CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Hot gas defrost system (onboard motor versions)

Electric defrost (on predisposed versions)

Automatic evaporation device for condensate water without the need for electrical energy

# REFRIGERATED TABLE ( 2 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK0002103LB

MODELLO  
BOK02PA

SERIE  
REFRIGERATED  
TABLES

## Technical Information

SPECIFICATION	DATA
MATERIAL	BN26KK0002103LB
DEFINITION	BOK02PA R290DX TNN PSPD C/A 50SV BAR
SUPPLY	ELECTRICS
DIM. WIDTH	1275 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	950 mm
NET WEIGHT	82 Kg
VOLUME (net)	0.847875
PACKAGE LENGTH	1320 mm
PACKAGE WIDTH	750 mm
PACKAGING HEIGHT	1060 mm
PACKAGE VOLUME	1,049 m3
GROSS PACKING WEIGHT	96 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50Hz
ELECTRICAL POWER	0.21 kW
GAS/REFRIGERANT TYPE	R134a
IP GRADE	IPX4
CAPACITY	246

# REFRIGERATED TABLE ( 2 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK




Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK0002103LB

MODELLO  
BOK02PA

SERIE  
REFRIGERATED  
TABLES

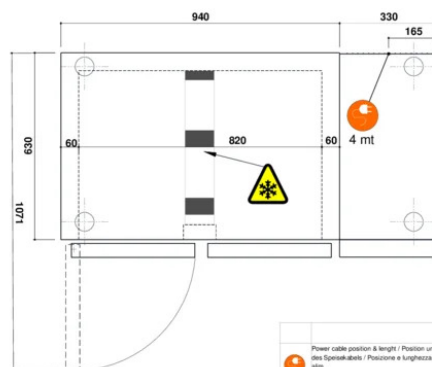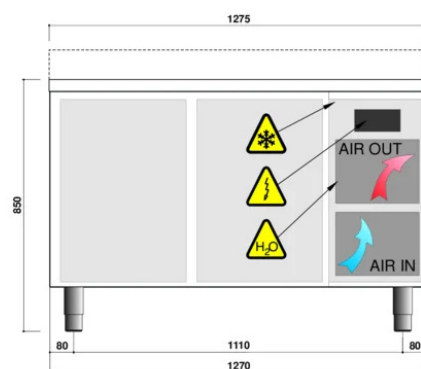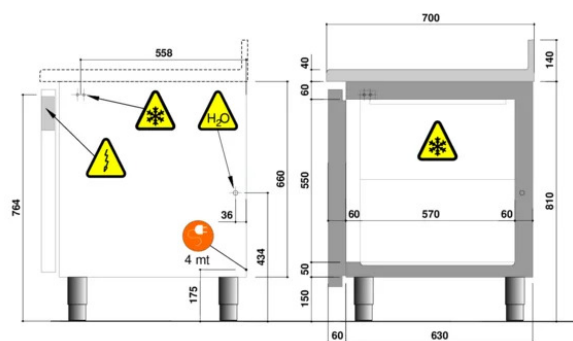

	Power cable position & length / Position und Länge des Stromkabels / Posizione e lunghezza cavo elettrico
	Refrigerant tubes / Kälteleitungen / Tuberi refrigeranti
	Drainage pipe / Abflusshohr / Tubo scarico
	Electrical components position / Position der elektrischen Komponente / Posizione componenti elettrici

**OK 2 DOORS**  
**GASTRONORM H 660**  
REFRIGERATED COUNTERS  
KÜHLTISCHE / TAVOLI REFRIGERATI  
TABLES REFRIGERÉES  
MESAS REFRIGERADAS  
GEKOELDE WERKBANKEN  
ОХЛАЖДЕННЫЕ ПРИЛАВКИ

# REFRIGERATED TABLE ( 2 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK0002103LB

MODELLO  
BOK02PA

SERIE  
REFRIGERATED  
TABLES

## PRODUCT'S RANGE PLUS



Evaporators placed behind each door pillar to ensure uniformity in cold distribution.



Ease of programming and immediate accessibility. The solution for quick and easy use.



Capacitor protected by filters to ensure optimal operation over time.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



Full extension drawers with special Filterer stainless steel telescopic slides