

ELECTRIC DIRECT STEAM COMBINATION OVEN - 6 X 2/3 GN ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project
Rev.:
Zone:
Location:



CODICE
CR1481570

MODELLO
HOCT026E

SERIE
Horizon III Slim

GENERAL CHARACTERISTICS

HORIZON III Slim - Professional oven for catering.
Perfectly smooth and airtight baking chamber with rounded edges.
Closing door with double tempered, air gap glass and heat-reflective inner glass for less heat radiation to the operator and greater efficiency.
Inner glass with folding opening for easy cleaning operation.
Opening baffle for easy cleaning operation of the fan on open cabinet.
Adjustable door hinges for optimal sealing.



ELECTRIC DIRECT STEAM COMBINATION OVEN - 6 X 2/3 GN ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project
Rev.:
Zone:
Location:



CODICE
CR1481570

MODELLO
HOCT026E

SERIE
Horizon III Slim

TECHNICAL SPECIFICATIONS

The Touch oven control panel has high-visibility LED alphanumeric displays (HVS - High Visibility System) to ensure clear readability. It also features a 2.4-inch color display (LCD - TFT) that allows you to view your favorite programs, preset programs, variable fan options, automatic washing, menu and settings in a clear and intuitive manner.

COOKING MODE: Automatic with 95 tested and memorised cooking programmes, including programmes for reheating on plate and baking tray. Programmable with the possibility of storing 99 cooking programmes in automatic sequence (up to 9 cycles) by assigning a dedicated name and icon. Manual cooking with three cooking modes with immediate start: convection from 30°C to 260°C, steam from 30°C to 130°C, combined convection + steam from 30°C to 260°C. **Clima®** - Automatic system for measuring and controlling the percentage of humidity in the cooking chamber. **Fast-Dry®** - Fast cooking chamber dehumidification system. Quick scroll & push selection of favourite programmes with dedicated scroller.

OPERATION: HVS (High Visibility System) alphanumeric LED displays for temperature, climate, time and core temperature. 2.4 inch colour display (LCD - TFT) for displaying favourite programmes, preset programmes, ventilation, automatic washing, menus, settings. **SCROLLER** knobs with Scroll and Push function to confirm choices. Manual preheating.

CONTROL FEATURES: Autoreverse (automatic reversal of fan rotation direction) for perfect cooking uniformity. Automatically regulated vapour condensation. Automatic chamber venting control. Manual humidifier.

LED cooking chamber lighting. Easy access to programmable user parameters, to customise the appliance via user menus. 2 ventilation speeds, the reduced speed activates the reduction of heating power. Intermittent speed is available for special cooking. Core temperature control with 4-point probe (core probe optional). Needle core probe ø 1 mm, for vacuum cooking and small pieces (optional). USB connection for downloading HACCP data, updating software and uploading/downloading cooking programs. Preparation for SN energy optimisation system (optional). **SERVICE** programme: Electronic board function test - Temperature probe display - Equipment operating hours counter for all main functions for scheduled maintenance. Functional check self-diagnosis before starting to use the equipment, with descriptive and acoustic signalling of any anomalies. **EcoSpeed** - Based on the quantity and type of product, the oven optimises and controls the energy supply, always maintaining the right cooking temperature and avoiding fluctuations. **EcoVapor** - The EcoVapor system achieves a clear reduction in water and energy consumption by automatically controlling the steam saturation in the cooking chamber. IPX3 protection against water jets.

MAINTENANCE CLEANING: LCS (Liquid Clean System) automatic cleaning system (optional), with integrated tank and automatic dosage (CombiClean liquid detergent, in 100% recyclable cartridges. Supplied with 1 cartridge canister of liquid detergent CDL05 - 990 g). 7 automatic washing programmes. Manual washing system with external hand shower (hand shower optional).

ELECTRIC DIRECT STEAM COMBINATION OVEN - 6 X 2/3 GN ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project
Rev.:
Zone:
Location:



CODICE
CR1481570

MODELLO
HOCT026E

SERIE
Horizon III Slim

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1481570
DEFINITION	ICCT026E MISTO EL.06GN2/3 C/DIG.
COMMERCIAL LINE	ICON51 E
SUPPLY	ELECTRICS
DIM. WIDTH	510 mm
DIM. PRODUCTIVITY	625 mm
DIM. HEIGHT	880 mm
NET WEIGHT	57 Kg
VOLUME (net)	0.281
PACKAGE LENGTH	760 mm
PACKAGE WIDTH	570 mm
PACKAGING HEIGHT	1100 mm
PACKAGE VOLUME	0,476 m3
GROSS PACKING WEIGHT	68 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	5.25 kW
GAS/REFRIGERANT TYPE	NO GAS
IP GRADE	IPX4
CERTIFIED MODEL	HOCT026E

ELECTRIC DIRECT STEAM COMBINATION OVEN - 6 X 2/3 GN ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS


Project
Rev.:
Zone:
Location:



CODICE
CR1481570

MODELLO
HOCT026E

SERIE
Horizon III Slim

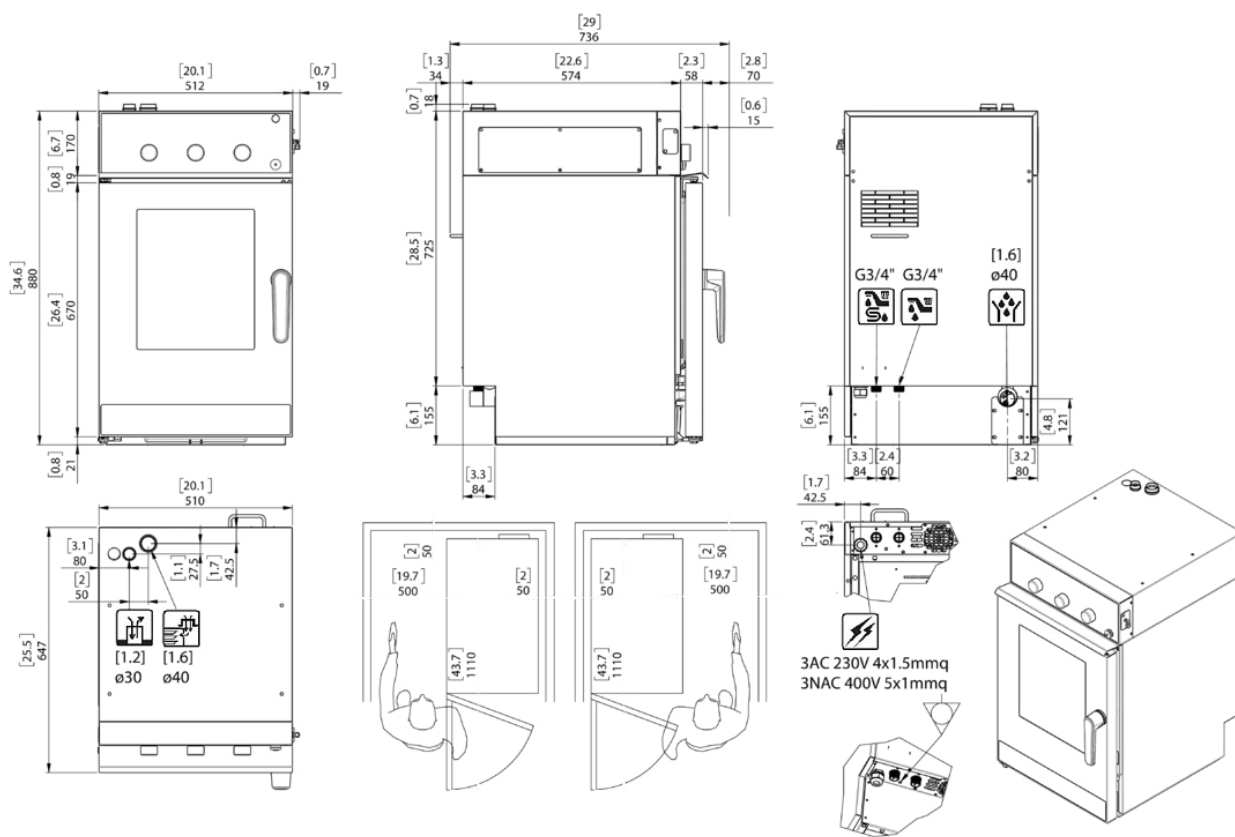

Dimensions: Millimeters [inches]

ICCT026E/ICCM026E NEUTRI

I dati riportati sul presente documento sono da ritenersi non vincolanti. L'azienda si riserva di apportare modifiche tecniche in qualsiasi momento.
The specification shown in this document are to be considered non binding. The company reserves the right to make technical change at any moment.
Die auf dieser Unterlage angegebenen technischen Daten sind als unverbindlich anzusehen. Die Firma behält sich das Recht vor zu jeder Zeit technische Änderungen vorzunehmen.
Les données techniques sur ce document ne doivent pas être considérées contraignantes. La société se réserve le droit d'apporter des modifications techniques à tout moment.
Los datos técnicos indicados en el presente catálogo no son vinculantes. La empresa se reserva el derecho de efectuar modificaciones sin previo aviso.

ELECTRIC DIRECT STEAM COMBINATION OVEN - 6 X
2/3 GN ASSISTED COOKING - ELECTRONICALLY
CONTROLLED MANUAL CONTROLS

Project
Rev.:
Zone:
Location:



CODICE
CR1481570


MODELLO
HOCT026E

SERIE
Horizon III Slim

PRODUCT'S RANGE PLUS



The Ecospeed Dynamic system, depending on the quantity and type of product, optimises and controls the energy supply, ensuring the correct cooking temperature at all times, avoiding fluctuations and thus lower energy and water consumption and reduced weight loss.



2-speed ventilation. Intermittent ventilation function is available for special cooking.



2.4-inch color display (LCD - TFT) for displaying favorite programs, preset programs, variable ventilation, automatic washing, menus, settings.



always cooking uniformity, thanks to the CLIMA system: automatic temperature and humidity control always ideal depending on the food being cooked.



For gas ovens, the Green Fine Tuning burner modulation system and patented high-efficiency heat exchanger prevent wasted power and reduce harmful emissions.

ELECTRIC DIRECT STEAM COMBINATION OVEN - 6 X 2/3 GN ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project
Rev.:
Zone:
Location:



CODICE
CR1481570

MODELLO
HOCT026E

SERIE
Horizon III Slim

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
SM026	SM026	STAINLESS STEEL WALL BRACKET
PLG5016	PLG5016	PLUG - 380 V - 16A - 5P
PAC026	PAC026	STAINLESS STEEL HEAT PROTECTION FOR SIDE WALL
KP004	KP004	FOOT KIT - 150 MM H
KISC04F	KISC04F	MULTIPOINT CORE PROBE KIT Ø 3 MM - FIXED PROBE - T VERSION
KISC04C	KISC04C	MULTIPOINT CORE PROBE KIT Ø 3 MM - WITH EXTERNAL CONNECTOR, FOR BUILT-IN OVEN VERSION T
KISA01F	KISA01F	CORE NEEDLE PROBE KIT Ø 1 MM - FIXED PROBE - T VERSION
KFIC026E	KFIC026E	PULL-OUT BUILT-IN OVEN KIT, WITH INTEGRATED EXTRACTOR HOOD 1N-AC230 V - 3.0 KW
ICLD	ICLD	HAND SHOWER COMPLETE WITH FITTINGS AND CONNECTIONS
CKO026SE	CKO026SE	SUCTION HOOD
CKO026E	CKO026E	EXTRACTOR HOOD WITH AIR CONDENSER - CAN ONLY BE USED ON PRE-FITTED OVENS
CIN026	CIN026	COOLING AIR CONVEYOR FOR RECESSED INSTALLATION. STAINLESS STEEL
CBL5015	CBL5015	CABLE - 3 MT - 5 X 1,5 MMQ
KCOE026	KCOE026	HORIZON III SLIM OVERLAY KIT
PCSM	PCSM	FLOWMETER 10-100
PCSK	PCSK	PURITY C STEAM FILTER HEAD KIT
PCSF	PCSF	PURITY C STEAM 1100 CARTRIDGE
KSC004R	KSC004R	MULTIPOINT CORE PROBE Ø 3 MM.
KSA001	KSA001	NEEDLE CORE PROBE Ø 1 MM.
CCE	CCE	HOOD MANIFOLD FOR EXTERNAL CONNECTION - Ø 150 MM
ICFX01	ICFX01	FAT FILTER

ELECTRIC DIRECT STEAM COMBINATION OVEN - 6 X 2/3 GN ASSISTED COOKING - ELECTRONICALLY CONTROLLED MANUAL CONTROLS

Project
Rev.:
Zone:
Location:


















CODICE
CR1481570

MODELLO
HOCT026E

SERIE
Horizon III Slim

OPTIONAL

MODELLO	DESCRIZIONE
 NPS	OPPOSITE DOOR
 NPK	PREARRANGEMENT FOR SUCTION HOOD CONNECTION
 MKC026	MARINE VERSION KIT
 KSC004F	MULTIPOINT CORE PROBE. Ø 3 MM - T VERSION
 KSC004C	MULTIPOINT CORE PROBE Ø 3 MM - WITH EXTERNAL CONNECTOR, FOR BUILT-IN OVEN - VERSION T
 KSA001F	NEEDLE CORE PROBE. Ø 1 MM - T VERSION
 ILCS1	LCS AUTOMATIC WASHING SYSTEM - 1 CARTRIDGE CANISTER OF LIQUID DETERGENT INCLUDED CDL05 - 990 GR. - T VERSION
 SN	ENERGY OPTIMIZATION SUPPLEMENT. FOR ELECTRIC MODELS ONLY
 APDS	SECURITY DOOR OPENING WITH DOUBLE CLICK
 TS-CI-026RE-C50	3-AC 400 V - 50 HZ
 TS-CI-026RE-A50	1N-AC 230 V - 50 HZ
 TS-CI-026RE-H60	1N-AC 230 V - 60 HZ - 3,7 KW
 TS-CI-026RE-H50	1N-AC 230 V - 50 HZ - 3,7 KW
 TS-CI-026RE-C60	3-AC 400 V - 60 HZ
 TS-CI-026RE-A60	1N-AC 230 V - 60 HZ