

# FREEZER COUNTER WITHOUT MOTOR ( 3 DOORS TEMP -15/-20°C)

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK602210300

MODELLO  
BOKPBT03

SERIE  
REFRIGERATED  
TABLES

## GENERAL CHARACTERISTICS

Baron refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed delicatessen products, thanks also to an automatic door closing system with magnetic gasket.



## TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fullterer telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

### REFRIGERATION UNIT

Equipped with a remote condensing unit

Evaporators positioned behind each door pillar to ensure uniform cold distribution

Evaporators with treatment in cataphoresis

### CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Electric defrost (on predisposed versions)

# FREEZER COUNTER WITHOUT MOTOR ( 3 DOORS TEMP -15/-20°C)

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**BN26KK602210300**

MODELLO  
**BOKPBT03**

SERIE  
**REFRIGERATED  
TABLES**

## Technical Information

| SPECIFICATION         | DATA            |
|-----------------------|-----------------|
| MATERIAL              | BN26KK602210300 |
| SUPPLY                | ELECTRICS       |
| DIM. WIDTH            | 1550 mm         |
| DIM. PRODUCTIVITY     | 700 mm          |
| DIM. HEIGHT           | 810 mm          |
| NET WEIGHT            | 89 Kg           |
| VOLUME (net)          | 0.87885         |
| PACKAGE LENGTH        | 1600 mm         |
| PACKAGE WIDTH         | 750 mm          |
| PACKAGING HEIGHT      | 1060 mm         |
| PACKAGE VOLUME        | 1,272 m3        |
| GROSS PACKING WEIGHT  | 106 Kg          |
| STANDARD POWER SUPPLY | 220-240V 1N     |
| FREQUENCY             | 50Hz            |
| ELECTRICAL POWER      | 0.955 kW        |
| GAS/REFRIGERANT TYPE  | R452a           |
| IP GRADE              | IPX4            |
| CAPACITY              | 369             |

# FREEZER COUNTER WITHOUT MOTOR ( 3 DOORS TEMP -15/-20°C)


Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK602210300


MODELLO  
BOKPBT03

SERIE  
REFRIGERATED  
TABLES

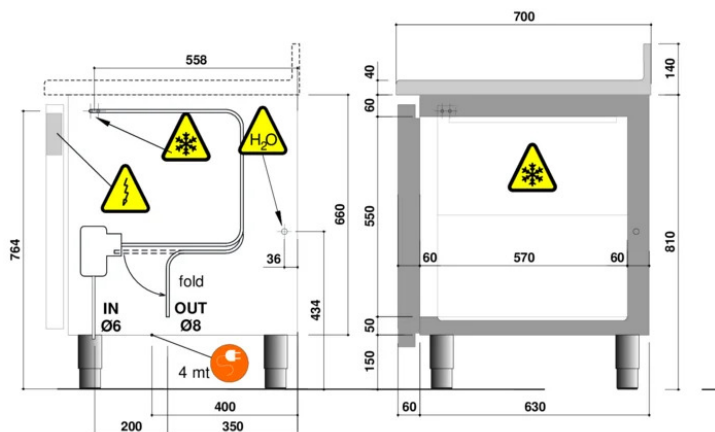

## Remote unit connections:

- suction Ø8 m
- liquid Ø6 m

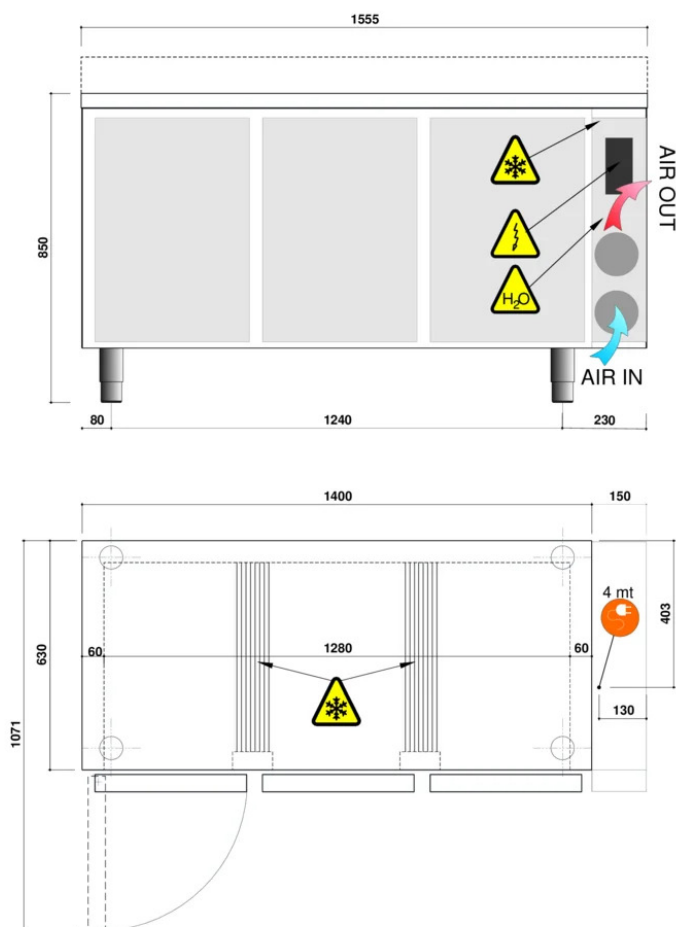

|  |  |
|--|--|
|  | Power cable position & length / Position und Länge des Speisekabels / Posizione e lunghezza cavo alim. |
|  | Refrigerant tubes / Kälteleitungen / Tubi refrigerante   |
|  | Drainage pipe / Abflrohr / Tubo scarico  |
|  | Electrical components position / Position der elektrischen Komponente / Posizione componenti elettrici |

## OKP 3 DOORS GASTRONORM H 660

REFRIGERATED COUNTERS WITHOUT COOLING UNIT  
KÜHLTISCHE OHNE KÜHELEINHEIT  
TAVOLI REFRIGERATI PREDISPOSTI  
TABLES REFRIGEREES SANS GROUPE LOGE  
MESAS REFRIGERADA SIN UNIDAD DE ENFRIAMIENTO

# FREEZER COUNTER WITHOUT MOTOR ( 3 DOORS TEMP -15/-20°C)

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK602210300

MODELLO  
BOKPBT03

SERIE  
REFRIGERATED  
TABLES

## PRODUCT'S RANGE PLUS



Ease of programming and immediate accessibility. The solution for quick and easy use.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.



Full extension drawers with special Fuller stainless steel telescopic slides