

CODICE
CR1358409T4W

MODELLO
QT90PCV/IND401-T4W

SERIE
BARON 4.0

GENERAL CHARACTERISTICS

From the solid foundation of Baron tradition, comes the new Queen 4.0 kitchen, even more practical, more accessorized, more technological.

An evolution in the field of professional kitchens.

Queen 4.0 is perfectly designed in detail to speed up and simplify every task of preparation, cooking, tidying up, and cleaning in the kitchen, and stand by you every day as a true ally in your work.



TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with a thickness of 2 mm.

Contoured dashboards with controls angled toward the operator.

Unbreakable glass-ceramic top.

Each cooking zone is marked with a circular silkscreen printing.

Heating by means of an inductor equipped with a device that detects the presence of the cooking vessel on the cooking zone and automatically switches the heating on/off, and a device against overheating.

Power 5 kW cada zone.

Power adjustable to 12 levels

Professional components tested to withstand intensive use over time

Safety sensor to prevent overheating.

Cooking zones with 5KW power

Mechanically controlled induction ready for IOT connection to Cloud

Serigraphs identifying cooking zones.

INDUCTION - 10kw - On cabinet

Project
Rev.:
Zone:
Location:



CODICE
CR1358409T4W

MODELLO
QT90PCV/IND401-T4W

SERIE
BARON 4.0

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1358409T4W
DEFINITION	QT90PCV/IND401-T4W INDUZ.ELETTRO.M40 A/G
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	44 Kg
VOLUME (net)	0.313
PACKAGE LENGTH	0 mm
PACKAGE WIDTH	0 mm
PACKAGING HEIGHT	0 mm
PACKAGE VOLUME	0,000 m3
GROSS PACKING WEIGHT	54 Kg
STANDARD POWER SUPPLY	380-415V 3
FREQUENCY	50/60 Hz
ELECTRICAL POWER	10 kW
IP GRADE	IPX4
CERTIFIED MODEL	QT90PCV/IND401

INDUCTION - 10kw - On cabinet

Project
Rev.:
Zone:
Location:




CODICE
CR1358409T4W

MODELLO
QT90PCV/IND401-T4W

SERIE
BARON 4.0

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRIITNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

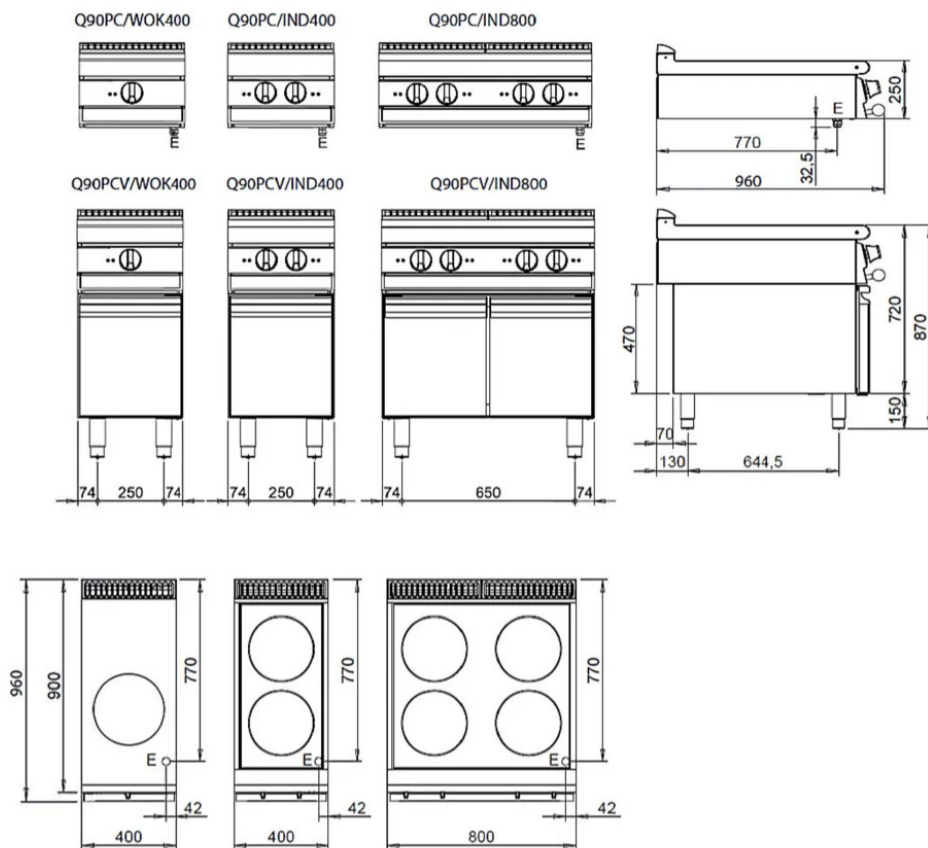

Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief
Presse étoupe de câble él. - Pisacable - Elektrische kabelwartel
- H2O*** Attacco arrivo acqua - Wasseranschluss - Water inlet
Arrivée eau - Union de agua - Wateraansluiting
EN ISO 228-1 G 3/4

PRODUCT'S RANGE PLUS



Serigraphs identifying cooking zones.



Professional components tested to withstand intensive use over time



Industry 4.0 ready version.



Power adjustable to 12 levels



Cooking zones with 5KW power



Ensures the correct positioning and suitability of the pot



Mechanically controlled induction ready for IOT connection to Cloud

INDUCTION - 10kw - On cabinet

Project
Rev.:
Zone:
Location:



CODICE
CR1358409T4W

MODELLO
QT90PCV/IND401-T4W

SERIE
BARON 4.0

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1357499	4.0IOTPRO	PRO Subscription - Cloud
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud