

ELECTRIC SOLID TOP - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1016099T4W

MODELLO
QT90TP/E800-T4W

SERIE
BARON 4.0

GENERAL CHARACTERISTICS

From the solid foundation of Baron tradition, comes the new Queen 4.0 kitchen, even more practical, more accessorized, more technological.

An evolution in the field of professional kitchens.

Queen 4.0 is perfectly designed in detail to speed up and simplify every task of preparation, cooking, tidying up, and cleaning in the kitchen, and stand by you every day as a true ally in your work.



TECHNICAL SPECIFICATIONS

Chrome molybdenum polished steel cooking plate 1.8 cm thick that is crushproof at high temperatures and also suitable for direct cooking.
Perimeter grease trap gutter with drain hole.
Plate heating (4 zones) by means of 4 kw heating elements.
Temperature control of heating elements by thermostat, operated by means of ergonomic recessed and inclined knobs.

4 independent cooking zones.

Adjustable temperature

Data collection, operation monitoring, remote control are just some of the possibilities that connectivity puts at your disposal.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC SOLID TOP - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1016099T4W

MODELLO
QT90TP/E800-T4W


SERIE
BARON 4.0

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1016099T4W
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	250 mm
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	16 kW

SERIE
BARON 4.0

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

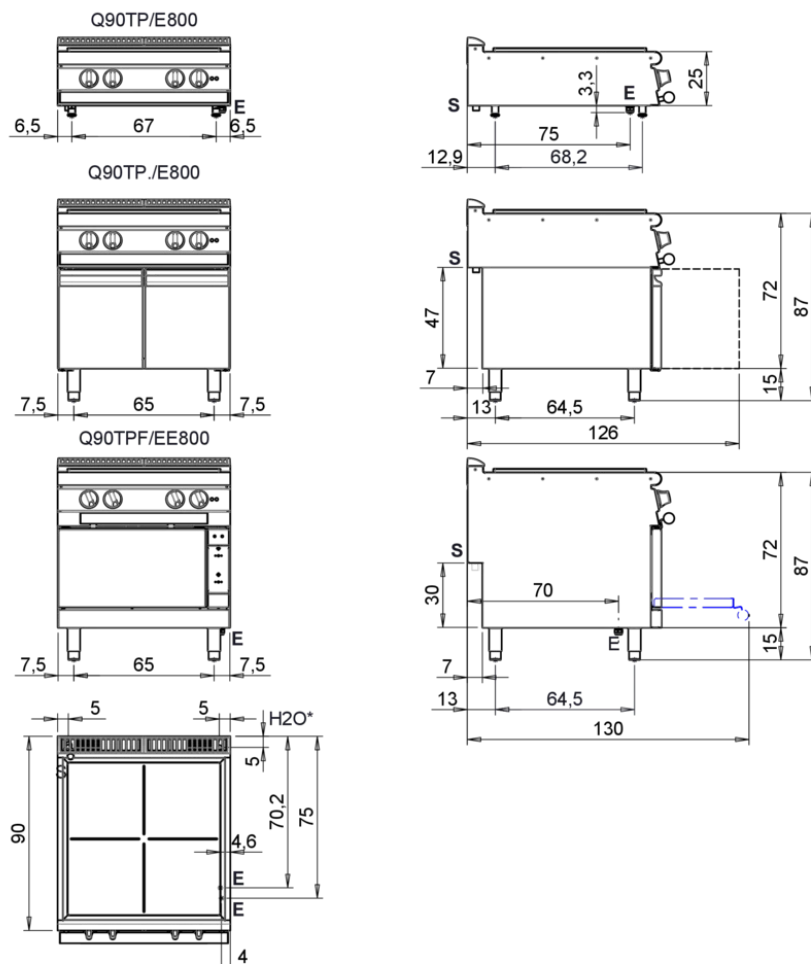

Legenda - Legende - Key - Légende - Leyenda - Legenda	
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN ISO 228-1 G1
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de depression - Válvula de depresión - Onderdrukklep - Válvula de depressão
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmita com Sistema de aquecimento indirecto
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno
G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
A1 =	Calda - Heiss - Warm - Chaud - Caliente - Warm - Morno
A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio
	EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaukraan - Torneira de nível

ELECTRIC SOLID TOP - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1016099T4W

MODELLO
QT90TP/E800-T4W

SERIE
BARON 4.0

PRODUCT'S RANGE PLUS



Possibility of setting 2 timers to control cooking. An acoustic signal warns the operator at the end of the set time.




Hotplate temperature control via touch screen and adjustment with ergonomic knob



Temperature regulation from 50 to 400 °C

Industry 4.0 ready version.



Cantilevered plate with perimeter grease trough with drain hole.



4 independent cooking zones.

ELECTRIC SOLID TOP - TOP VERSION

Project
Rev.:
Zone:
Location:



CODICE
CR1016099T4W

MODELLO
QT90TP/E800-T4W

SERIE
BARON 4.0

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR1357499	4.0IOTPRO	PRO Subscription - Cloud
CR1357479	4.0IOTENTRY	ENTRY Subscription - Cloud