

Multifunction Blast Chiller 16 GN1/1 +90°C / -40°C

Project
Rev.:
Zone:
Location:



CODICE
BN2ABD160335

MODELLO
BGL16

SERIE
MULTIFUNCTION

GENERAL CHARACTERISTICS

Work is easier thanks to the intuitive graphics of the user interface, designed to simplify access to functions, which are represented to be immediately identified and to encourage interaction between the user and the device.

In a single machine, a concentration of technology that will enable it to perform different and complementary for the best efficiency in the kitchen: in this way it will be immediately operational, without starting any complex procedure also thanks to 300 working processes and cycles.



TECHNICAL SPECIFICATIONS

Multifunction blast chiller with combinable cycles

GAS R290

7" full touch display

T° Range +90°C / -40°C

190 preloaded recipes

More than 20 pre-loaded combined cycles

Infinite combination of functions in combined work cycles

Bidirectional IOT 4.0 connectivity

0/100% humidity regulation with instant steam generator

Sanitation with combined IONS / STEAM cycle (Optional)

Wifi connection

Electronic fans

Thermostatic valve

Body entirely in AISI 304 steel

Newly developed scroll compressors

Multifunction Blast Chiller 16 GN1/1 +90°C / -40°C

Project
Rev.:
Zone:
Location:



CODICE
BN2ABD160335

MODELLO
BGL16

SERIE
MULTIFUNCTION

Technical Information

SPECIFICATION	DATA
MATERIAL	BN2ABD160335
SUPPLY	ELECTRICS
DIM. WIDTH	790 mm
DIM. PRODUCTIVITY	1000 mm
DIM. HEIGHT	1880 mm
NET WEIGHT	190 Kg
PACKAGE LENGTH	1100 mm
PACKAGE WIDTH	850 mm
PACKAGING HEIGHT	2045 mm
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	6.25 kW
GAS/REFRIGERANT TYPE	R290
REFRIGERATION POWER	10050
CELL SIZE	610x410x1130
CAPACITY	Lt. 360

Multifunction Blast Chiller 16 GN1/1 +90°C / -40°C


Project
Rev.:
Zone:
Location:



CODICE
BN2ABD160335

MODELLO
BGL16

SERIE
MULTIFUNCTION

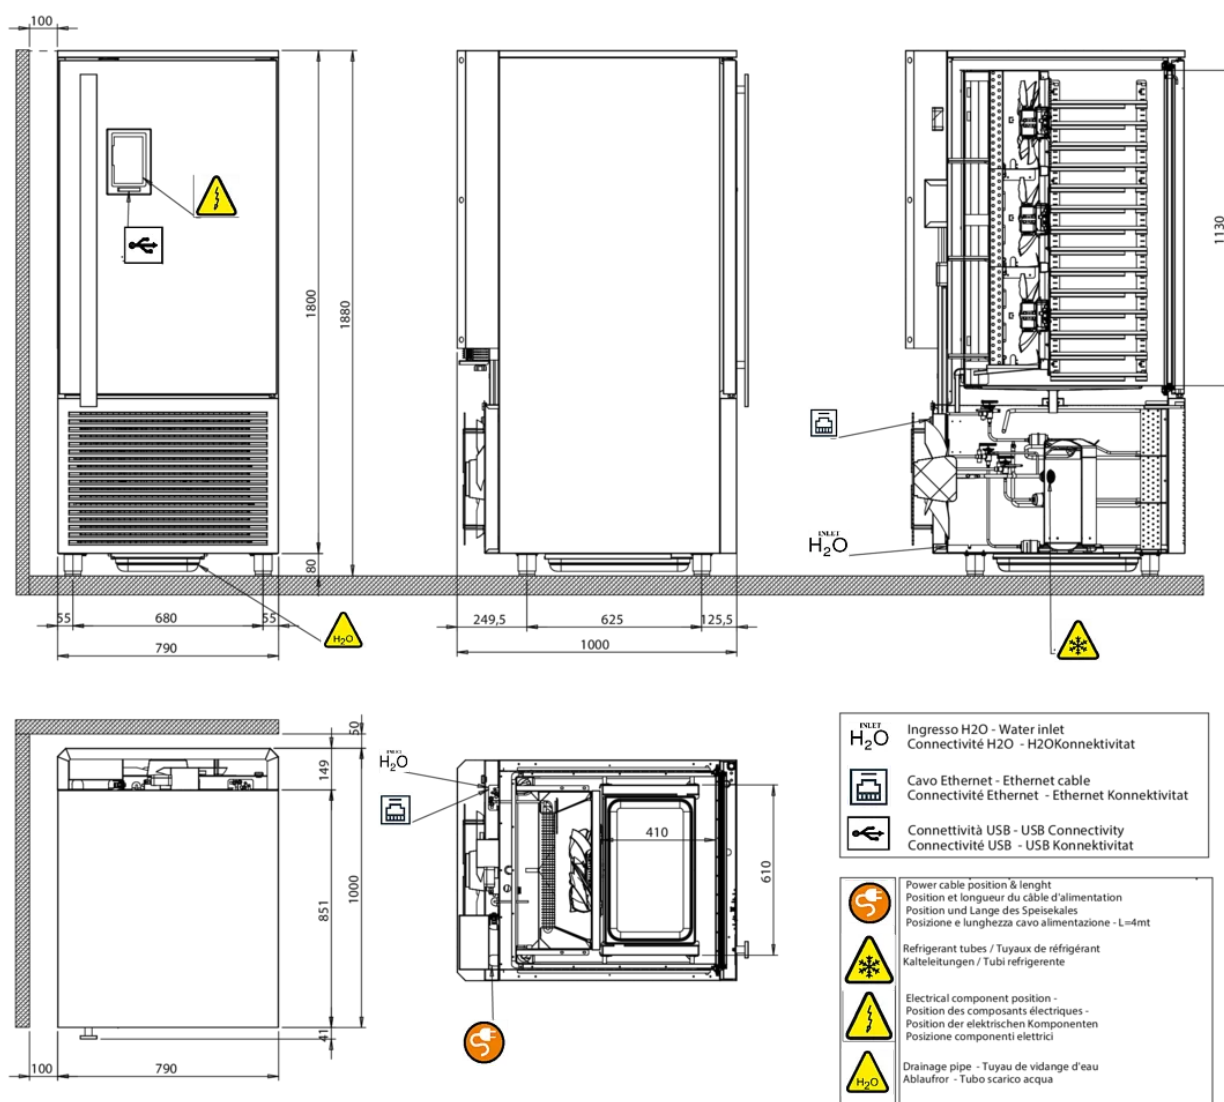

Multifunction Blast Chiller 16 GN1/1 +90°C / -40°C

Project
Rev.:
Zone:
Location:



CODICE
BN2ABD160335


MODELLO
BGL16

SERIE
MULTIFUNCTION

PRODUCT'S RANGE PLUS



0/100% humidity regulation with
instant steam generator



Sanitation with combined IONS /
STEAM cycle



Thanks to the R290 gas supplied as
standard for all available versions,
Olis guarantees care and
sustainability in all aspects of its
product development.