

INDIRECT HEATING ELECTRIC BOILING PAN - 100 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project
Rev.:
Zone:
Location:



CODICE
CR1356149

MODELLO
Q90PF/E1100S

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish. Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work. The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes. With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best. In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.
Height of the work surface adjustable from 840 to 900 mm.
Tops with a thickness of 2 mm.
AISI 304 stainless steel tanks with AISI 316 bottom.
Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.
Frontal drain by means of 2" chrome-plated brass faucet.
Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).
Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.
Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Stainless steel tank with aisi 318 bottom
Possibility of hot or cold water loading
Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.
Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.
The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

INDIRECT HEATING ELECTRIC BOILING PAN - 100 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project
Rev.:
Zone:
Location:



CODICE
CR1356149

MODELLO
Q90PF/EI100S

SERIE
QUEEN 9

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1356149
DEFINITION	Q90PF/EI100 S PEN.ELE M80 IND.C/VAL 100L
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	134.8 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1300 mm
PACKAGE VOLUME	1,140 m3
GROSS PACKING WEIGHT	150 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	21 kW
IP GRADE	IPX5
CAPACITY	100 litri
CERTIFIED MODEL	Q90PF/EI100

INDIRECT HEATING ELECTRIC BOILING PAN - 100 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project
Rev.:
Zone:
Location:




CODICE
CR1356149

MODELLO
Q90PF/EI100S

SERIE
QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

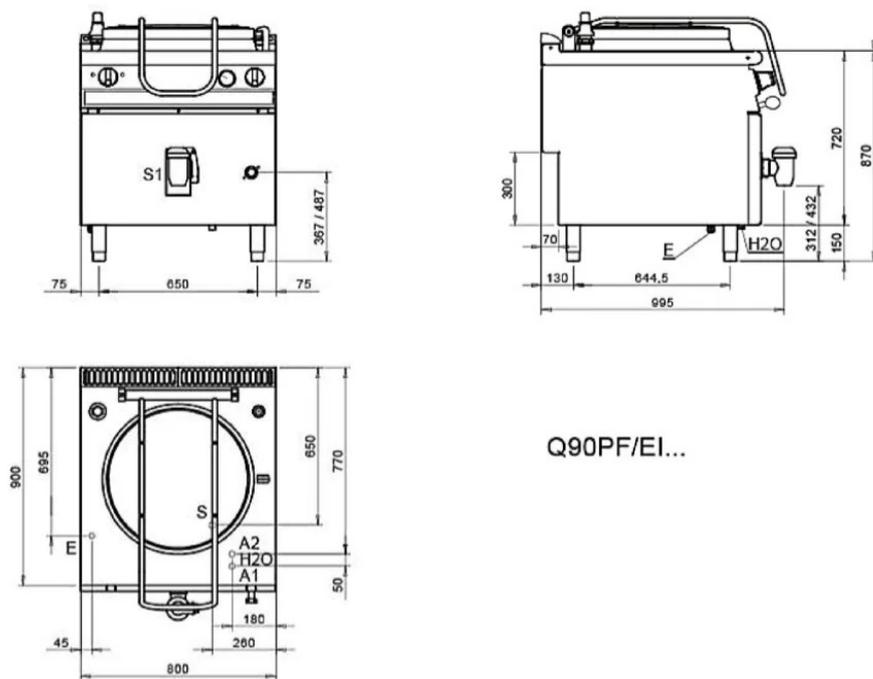

Q90PF/EI...

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H20 Attacchi arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Unión de agua - Wateraansluiting
- A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm EN ISO 228-1 G 3/4
- A2 = Fredda - Kalt - Cold - Froid - Fria - Koude EN ISO 228-1 G 3/4
- E Pressacavo entrata linea elettrica - Sospfbuchse - Electric cable stress relief
- S Presse étoupe de câble él. - Elektrische kabelwartel
- Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain - Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water tussenruimte EN ISO 228-1 G 1
- S1 Scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftaansluiting 2"

INDIRECT HEATING ELECTRIC BOILING PAN - 100 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project
Rev.:
Zone:
Location:



CODICE
CR1356149

MODELLO
Q90PF/E1100S

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Indirect pots with automatic cavity
condensate drain valve
The valve has a dual function
- recharges the pressure inside the
interspace
- allows automatic water
condensate discharge



Stainless steel tank with aisi 316
bottom



Possibility of hot or cold water
loading

INDIRECT HEATING ELECTRIC BOILING PAN - 100 L - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project
Rev.:
Zone:
Location:



CODICE
CR1356149

MODELLO
Q90PF/EI100S

SERIE
QUEEN 9

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
MA97347000	9C5	COLANDER BASKET
MA97348000	9CV5	VEGETABLE STRAINER BASKET FOR POT
MA97350900	9C10	COLANDER BASKET
MA97351000	9C15	COLANDER BASKET
MA97352000	9CV10	VEGETABLE STRAINER BASKET FOR POT
MA97353000	9CV15	VEGETABLE STRAINER BASKET FOR POT
MA97354000	9-I10	FUNNEL FOR POT DISCHARGE
MA97355000	9-I15	FUNNEL FOR POT DISCHARGE
MA97349000	9-I5	POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM