

ELECTRIC PASTA COOKER 2 TANKS 40 + 40 LITRES

Project
Rev.:
Zone:
Location:



CODICE
CR1018319

MODELLO
Q90CP/E800

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Cooking tanks made of AISI 316 stainless steel (an alloy with exceptional corrosion resistance even at high temperatures) of large capacity (42 liters), molded with inner radiused corners for maximum hygiene and cleanability, dotat ion of foam expansion, with residual starch discharge device.

Safety thermostat in tank against dry running.

Gas models

Safety pressure switch to prevent empty tank operation.

Stabilized flame burners with piezo ignition of the pilot burner.

Safety tap with thermocouple and progressive adjustment of power output independently for each tank.

Electric models

Armored stainless steel heating elements inserted into the tank.

Thermal protectors of the heating unit.

Multi-position, independent power regulator for each tank.

Safety pressure switch to prevent activation of heating without water in the tank.

Non-accessible internal compartment for total user safety, closed with door for aesthetic alignment. Version with fixed panel closure available.

Manual water loading, without the use of an electrical connection

In the electric version, the heating element can be rotated by more than 90°.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC PASTA COOKER 2 TANKS 40 + 40 LITRES

Project
Rev.:
Zone:
Location:



CODICE
CR1018319

MODELLO
Q90CP/E800

SERIE
QUEEN 9

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1018319
DEFINITION	Q90CP/E800 CUOCIPASTA EL. 2V.40LT M80
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	113.8 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	129 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	17 kW
MINIMUM PRESSURE	150
MAXIMUM PRESSURE	500
IP GRADE	IPX5
CERTIFIED MODEL	Q90CP/E800

ELECTRIC PASTA COOKER 2 TANKS 40 + 40 LITRES

Project
 Rev.:
 Zone:
 Location:




CODICE
CR1018319

MODELLO
Q90CP/E800

SERIE
QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
 MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

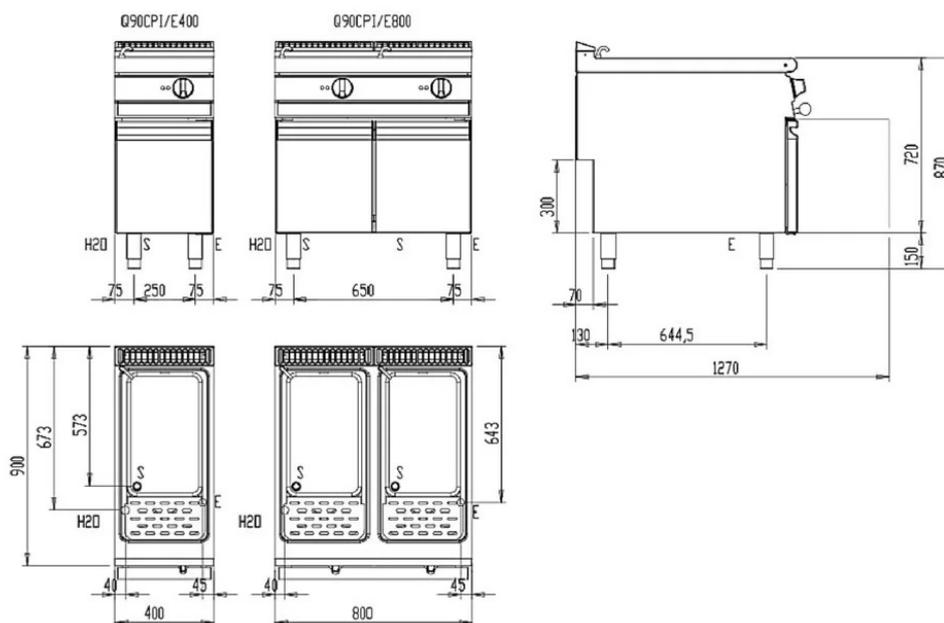

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN 10226-1 R1
S1	Scarico vasca - Wannenabflusrohr - Pan outlet - Vidange du bac - Descarga cuba - Water tœvoer - Descarga da cuba
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto
G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
H2O	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água
A1	Calda - Heiss - Warm - Chaud - Caliente - Warm - Momo
A2	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio Ø=1 cm
L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel

ELECTRIC PASTA COOKER 2 TANKS 40 + 40 LITRES

Project
Rev.:
Zone:
Location:



CODICE
CR1018319

MODELLO
Q90CP/E800

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Safety pressure switch to prevent activation of heating without water in the tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Non-accessible internal compartment for total user safety, closed with door for aesthetic alignment. Version with fixed panel closure available.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.



Manual water loading, without the use of an electrical connection



The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC PASTA COOKER 2 TANKS 40 + 40 LITRES

Project
Rev.:
Zone:
Location:



CODICE
CR1018319

MODELLO
Q90CP/E800

SERIE
QUEEN 9

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0999149	GFCP40	40Lt BOTTOM TANK GRID
CR0999179	9KIT-A	40 LITRE TUB BASKET KIT
CR0999189	9KIT-B	40 LITRE TUB BASKET KIT
CR0999199	9KIT-C	40 LITRE TUB BASKET KIT
CR0999209	9KIT - D	KIT 3 GN1/3 STAINLESS STEEL BASKETS WITH SIDE HANDLES
CR0999219	9KIT - E	KIT 2 GN1/2 STAINLESS STEEL BASKETS WITH SIDE HANDLES
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999169	CVCP40	40 LITRE TANK LID
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE