

ELECTRIC PASTA COOKER 1 WELLS 26 L

Project
Rev.:
Zone:
Location:



CODICE
CR1019289

MODELLO
Q70CP/E400

SERIE
QUEEN 7

GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs. As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Cooking tanks made of AISI 316 stainless steel (alloy with exceptional resistance to corrosion even at high temperatures) of large capacity (42 liters), molded with radiused inner corners for maximum hygiene and cleanability, equipped with large foam expansion zones, with residual starch discharge device. Safety thermostat in the tank against dry running.

Gas models

Safety pressure switch to prevent empty tank operation.

Stabilized flame burners with piezo ignition of the pilot burner.

Safety tap with thermocouple and progressive adjustment of the power output independently for each tank.

Electric models

Armored stainless steel heating elements inserted into the tank.

Thermal protectors of the heating unit.

Multi-position power regulator, independent for each tank.

Non-accessible internal compartment for total user safety, closed with door for aesthetic alignment. Version with fixed panel closure available.

Manual water loading, without the use of an electrical connection

In the electric version, the heating element can be rotated by more than 90°.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC PASTA COOKER 1 WELLS 26 L

Project
Rev.:
Zone:
Location:



CODICE
CR1019289

MODELLO
Q70CP/E400

SERIE
QUEEN 7

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1019289
DEFINITION	Q70CP/E400 CUOCIP.E.L.1V.28LT M40 S/P S/C
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	400 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	870 mm
NET WEIGHT	40 Kg
VOLUME (net)	0.244
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	450 mm
PACKAGING HEIGHT	1170 mm
PACKAGE VOLUME	0,452 m3
GROSS PACKING WEIGHT	50.2 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	7.5 kW
MINIMUM PRESSURE	150
MAXIMUM PRESSURE	500
IP GRADE	IPX5
CAPACITY	15 litri
CERTIFIED MODEL	Q70CP/E400

ELECTRIC PASTA COOKER 1 WELLS 26 L

Project
Rev.:
Zone:
Location:




CODICE
CR1019289

MODELLO
Q70CP/E400

SERIE
QUEEN 7

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

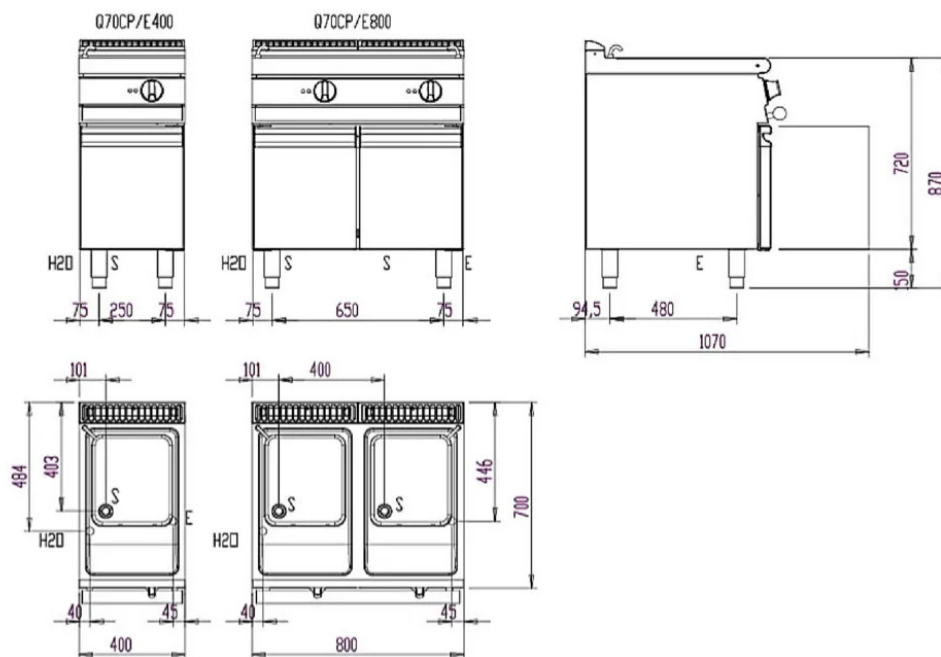

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda	
E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Waterafvoersluiting - Junção descarga água EN 10226-1 R1	H2O Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno A2 Fredda - Kalt - Cold - Froid - Fria - Koude - Frio Ø = 1 cm
S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível
S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	

ELECTRIC PASTA COOKER 1 WELLS 26 L

Project
Rev.:
Zone:
Location:



CODICE
CR1019289

MODELLO
Q70CP/E400

SERIE
QUEEN 7

PRODUCT'S RANGE PLUS



Manual water loading, without the use of electrical connection in gas versions



Safety pressure switch to prevent activation of heating without water in the tank.



Electric version rotatable resistors in 90° tank



Non-accessible inner compartment for total safety in utilities, closed with door for aesthetic alignment. Fixed panel lock version available.

ELECTRIC PASTA COOKER 1 WELLS 26 L

Project
Rev.:
Zone:
Location:



CODICE
CR1019289

MODELLO
Q70CP/E400

SERIE
QUEEN 7

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
CR0999109	CCP16D	BASKET GN1/6 RIGHT-HAND HANDLE
CR0999079	CCP12	BASKET GN1/2 SIDE HANDLE
CR0999089	CCP13L	BASKET GN1/3 SIDE HANDLE
CR0999099	CCP13F	BASKET GN1/3 FRONT HANDLE
CR0999119	CCP16S	BASKET GN1/6 LEFT HANDLE
CR0999129	CCP19	BASKET GN1/9 FRONT HANDLE
CR0999139	GFCP26	BOTTOM TANK GRILLE 26Lt.
CR0999159	CVCP26	TANK LID 26LT
CR0999229	7KIT-A	PASTA COOKER KIT
CR0999239	7KIT-B	PASTA COOKER KIT
CR0999249	7KIT-C	PASTA COOKER KIT