

# REFRIGERATED TABLE PREPARED ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK102210307

MODELLO  
BOKP03PA

SERIE  
REFRIGERATED  
TABLES

## GENERAL CHARACTERISTICS

Baron refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed delicatessen products, thanks also to an automatic door closing system with magnetic gasket.



## TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fullterer telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

### REFRIGERATION UNIT

Equipped with a remote condensing unit

Evaporators positioned behind each door pillar to ensure uniform cold distribution

Evaporators with treatment in cataphoresis

### CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Electric defrost (on predisposed versions)

# REFRIGERATED TABLE PREPARED ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK102210307

MODELLO  
BOKP03PA

SERIE  
REFRIGERATED  
TABLES

## Technical Information

SPECIFICATION	DATA
MATERIAL	BN26KK102210307
DEFINITION	@@@BOKP03PA-R134DX TNN 50SV PSPSPD C/A
SUPPLY	ELECTRICS
DIM. WIDTH	1555 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	950 mm
NET WEIGHT	86 Kg
VOLUME (net)	1.034075
PACKAGE VOLUME	1.45 m3
GROSS PACKING WEIGHT	103 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50Hz
ELECTRICAL POWER	0.345 kW
GAS/REFRIGERANT TYPE	R134a
IP GRADE	IPX4
CAPACITY	369

# REFRIGERATED TABLE PREPARED ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK


Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK102210307


MODELLO  
BOKP03PA

SERIE  
REFRIGERATED  
TABLES

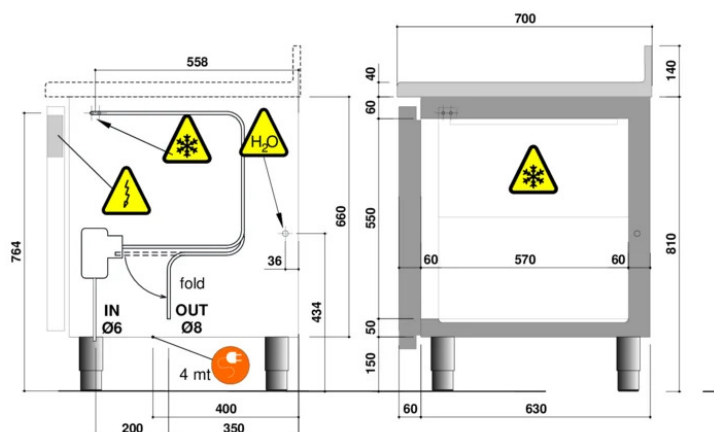

## Remote unit connections:

- suction Ø8 m
- liquid Ø6 m

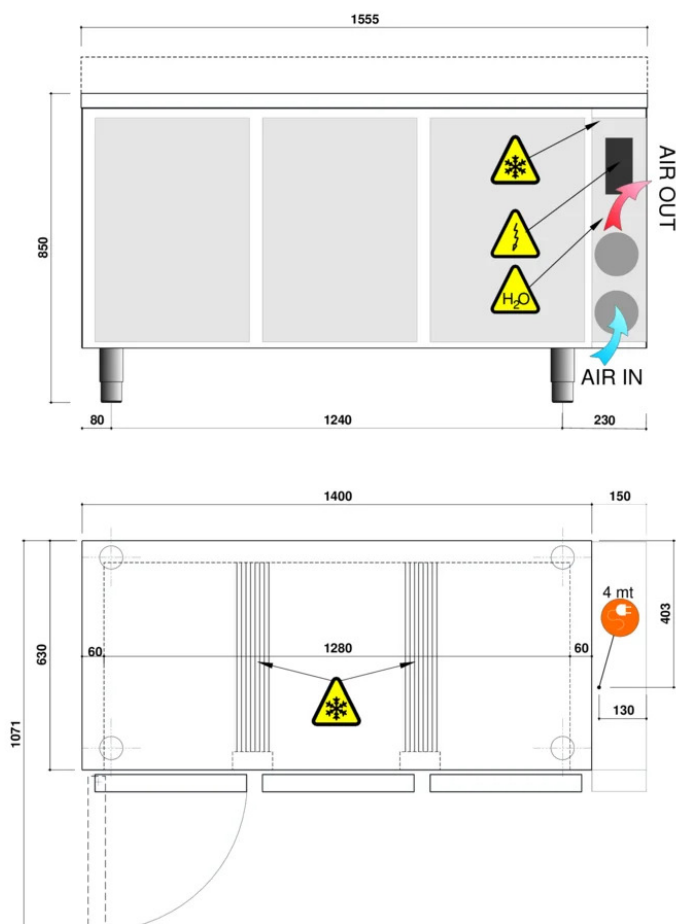

	Power cable position & length / Position und Länge des Speisekabels / Posizione e lunghezza cavo alim.
	Refrigerant tubes / Kälteleitungen / Tubi refrigerante
	Drainage pipe / Abflrohr / Tubo scarico
	Electrical components position / Position der elektrischen Komponente / Posizione componenti elettrici

## OKP 3 DOORS GASTRONORM H 660

REFRIGERATED COUNTERS WITHOUT COOLING UNIT  
KÜHLTISCHE OHNE KÜHELEINHEIT  
TAVOLI REFRIGERATI PREDISPOSTI  
TABLES REFRIGEREES SANS GROUPE LOGE  
MESAS REFRIGERADA SIN UNIDAD DE ENFRIAMIENTO

# REFRIGERATED TABLE PREPARED ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK102210307

MODELLO  
BOKP03PA

SERIE  
REFRIGERATED  
TABLES


## PRODUCT'S RANGE PLUS



Ease of programming and immediate accessibility. The solution for quick and easy use.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.



Full extension drawers with special Fuller stainless steel telescopic slides