

HYPER TECH WASH PLUS - BPHTW2STRPLUS

Project
Rev.:
Zone:
Location:



CODICE
BND212090

MODELLO
BPHTW2STRPLUS

SERIE
WASHING

GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



TECHNICAL SPECIFICATIONS

The new technology of potwashers allows you to easily and intuitively follow all the stages of your potwashing process directly from the control panel. The innovative rinsing circuit, the energy saving function (a device that optimises energy functions avoiding unnecessary waste) the high

level of performance and the high quality materials make these machines extremely competitive and versatile.

HYPER TECH WASH PLUS - BPHTW2STRPLUS

Project
Rev.:
Zone:
Location:



CODICE
BND212090

MODELLO
BPHTW2STRPLUS

SERIE
WASHING

Technical Information

SPECIFICATION	DATA
MATERIAL	BND212090
DEFINITION	BPHTW2STRPLUS LAVAOGGETTI EL. 70X70
DIM. WIDTH	840 mm
DIM. PRODUCTIVITY	885 mm
DIM. HEIGHT	1790 mm
NET WEIGHT	238 Kg
PACKAGE LENGTH	940 mm
PACKAGE WIDTH	900 mm
PACKAGING HEIGHT	2300 mm
PACKAGE VOLUME	1,946 m3
GROSS PACKING WEIGHT	263 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	12.5 kW
BASKET SIZE	700x700 mm
WASH CYCLES	4/7/10/13 min
WASH PUMP	1750W
WATER CONSUMPTION	4,3 lt

HYPER TECH WASH PLUS - BPHTW2STRPLUS


Project
Rev.:
Zone:
Location:



CODICE
BND212090

MODELLO
BPHTW2STRPLUS

SERIE
WASHING

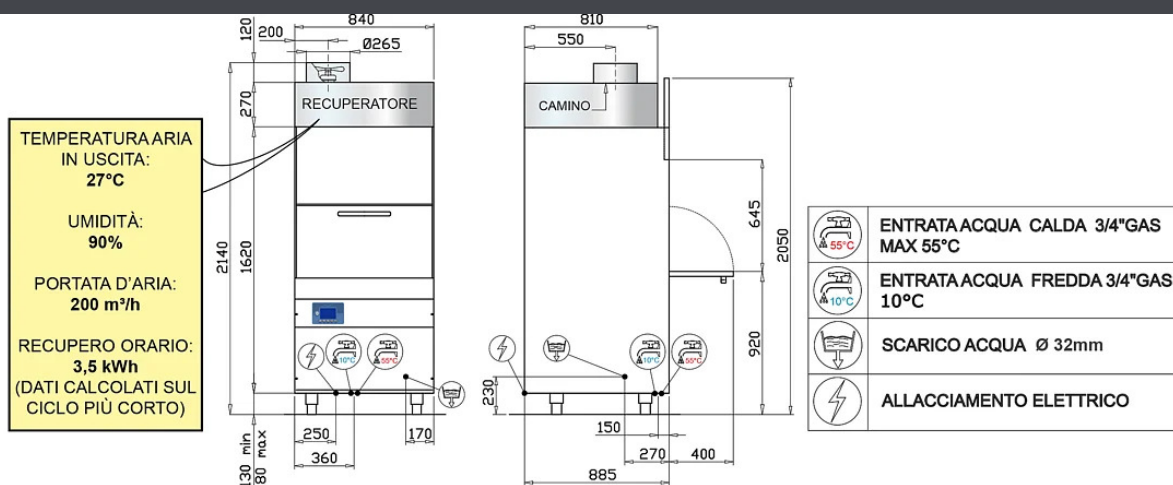

DATI TECNICI					
DIMENSIONI ESTERNE					
larghezza		840 mm			
profondita'		885 mm			
altezza(piedino avvitato)		2140 mm			
PESO NETTO (versione base)		215 kg			
TENSIONE DI ALIMENTAZIONE		400V 3N 50Hz			
POTENZA MASSIMA ASSORBITA		12500 W			
DUREZZA ACQUA		< 8 °F			
CONDUTTIVITA' ACQUA		> 200µS/cm			
PRESSIONE ACQUA ALIMENTAZIONE		200-400 kPa			
ALTEZZA UTILE & CESTI					
altezza utile		645 mm			
DIMENSIONE CESTI		700x700 mm			
DOTAZIONE CESTI		1XC86/A - 1XC97/A - 1X91100			
N° CICLI	(minuti)	1 (4)	2 (7)	3 (10)	4 (13)
ALIMENTAZIONE ACQUA 10°C					
produzione cesti(*) ⁽¹⁾	Cesti/h	15	8	6	4
CONSUMO ACQUA PER CICLO		4,3 L			
CAPACITA' BOILER		20 L			
RESISTENZA BOILER		9000 W			
SET. TEMPERATURA RISCACQUO		85°C			
CAPACITA' VASCA		78 L			
RESISTENZA VASCA		6000 W			
SET. TEMPERATURA VASCA		55°C			
POTENZA POMPA LAVAGGIO		1750 W (800 l/min ^{***}) × 2			
POTENZA POMPA RISCACQUO		250 W (150 l/min ^{***})			
pompa scarico (opzionale)		190 W (120 l/min ^{***})			
LIVELLO DI PRESSIONE ACUSTICA		69,9 dB(A)			

(*) CON TERMOSTOP DI SERIE

(**) PORTATA MASSIMA

(1) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETÀ DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI

PAGINA 1 / 1

HYPER TECH WASH PLUS - BPHTW2STRPLUS

Project
Rev.:
Zone:
Location:



CODICE
BND212090


MODELLO
BPHTW2STRPLUS

SERIE
WASHING

PRODUCT'S RANGE PLUS



Double-walled door



RT system to recover the steam produced by the running machine to preheat the cold feed water. Immediate savings on energy consumption and improved temperature in the working environment, which is no longer saturated by moisture produced by the machine.



Stabilized pressure rinsing and constant boiler water temperature of 85°C. Thanks to the atmospheric boiler, mixing of mains water in the rinse phase is avoided. The PLUS system also ensures greater control and correct dosing of rinse aid in each cycle.



Fully molded basin. Independent stainless steel wash/rinse arms