

# ELECTRIC DIRECT STEAM COMBI OVEN - 6 X 1/1 GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1481600

MODELLO  
HOCM061E

SERIE  
Horizon III Slim

## GENERAL CHARACTERISTICS

HORIZON III Slim - Professional oven for catering.  
Perfectly smooth and airtight baking chamber with rounded edges.  
Closing door with double tempered, air gap glass and heat-reflective inner glass for less heat radiation to the operator and greater efficiency.  
Inner glass with folding opening for easy cleaning operation.  
Opening baffle for easy cleaning operation of the fan on open cabinet.  
Adjustable door hinges for optimal sealing.



## TECHNICAL SPECIFICATIONS

The control panel of the manual oven consists of selectors and knobs with an ergonomic design that makes it easy to use and intuitive. Functions are controlled by electromechanical controls, while indicator lights provide feedback on oven operation clearly and immediately.

**COOKING MODE:** Manual cooking with three cooking modes: Convection from 50°C to 260°C, Steam from 50°C to 130°C, Combined from 50°C to 260°C.

**OPERATION:** Electromechanical selector control panel with operation control lights.

**CONTROL FEATURES:** Autoreverse (automatic reversal of fan rotation direction) for perfect cooking uniformity. Manual chamber venting. LED cooking chamber lighting. IPX3 protection against water jets.

**CLEANING, ORDINARY MAINTENANCE:** Manual washing system with external hand shower (hand shower optional).

# ELECTRIC DIRECT STEAM COMBI OVEN - 6 X 1/1 GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1481600**

MODELLO  
**HOCM061E**

SERIE  
**Horizon III Slim**

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1481600
DEFINITION	ICCM061E MISTO EL.06GN1/1 C/DIG.
COMMERCIAL LINE	ICON51 E
SUPPLY	ELECTRICS
DIM. WIDTH	510 mm
DIM. PRODUCTIVITY	800 mm
DIM. HEIGHT	880 mm
NET WEIGHT	84 Kg
VOLUME (net)	0.359
PACKAGE LENGTH	930 mm
PACKAGE WIDTH	600 mm
PACKAGING HEIGHT	1100 mm
PACKAGE VOLUME	0,614 m3
GROSS PACKING WEIGHT	98 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	7.75 kW
GAS/REFRIGERANT TYPE	NO GAS
IP GRADE	IPX4
CAPACITY	6 GN 1/1
CERTIFIED MODEL	HOCM061E

**ELECTRIC DIRECT STEAM COMBI OVEN - 6 X 1/1 GN  
ELECTROMECHANICAL CONTROLS**

Project .....

Rev.: .....

Zone: .....


Location: .....



CODICE  
**CR1481600**

MODELLO  
HOCM061E

SERIE  
**Horizon III Slim**

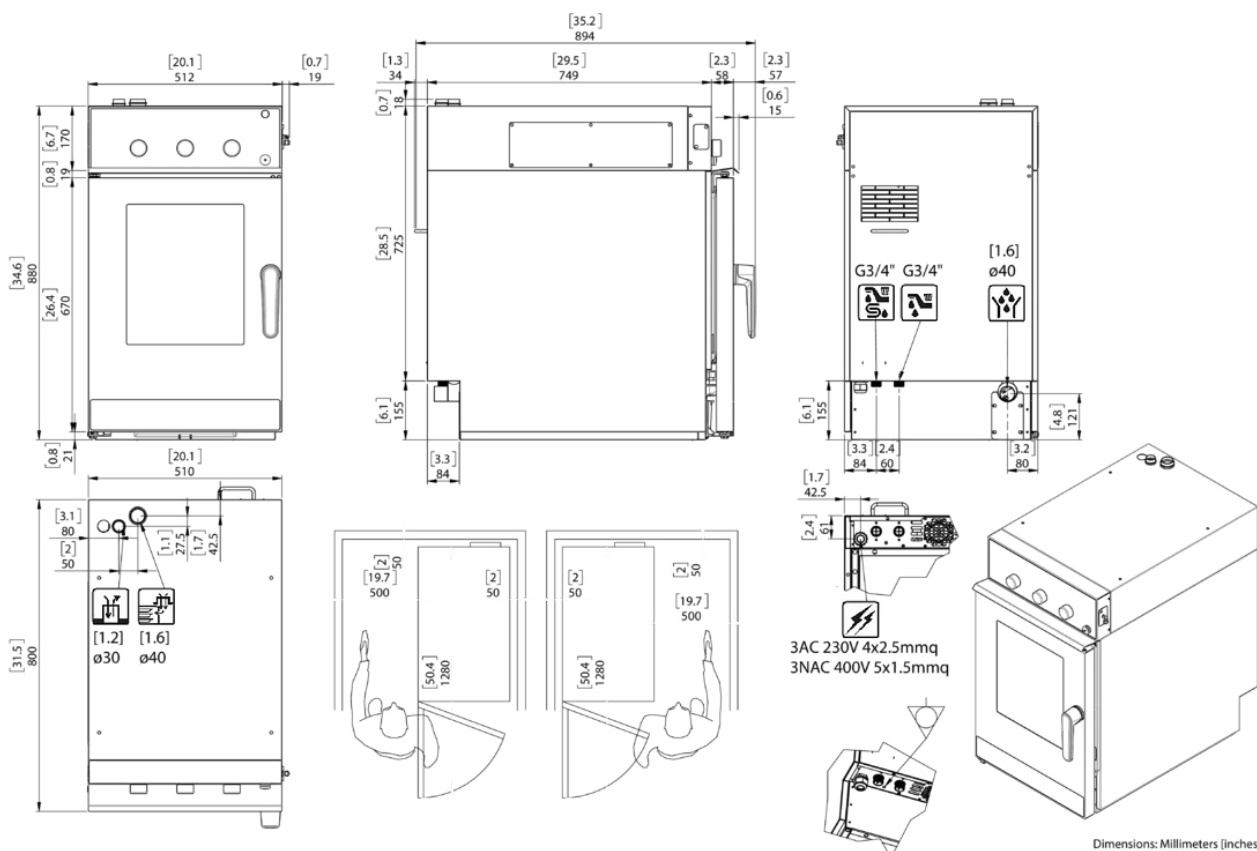

Dimensions: Millimeters [inches]

ICCT061E/ICCM061E NEUTRI

I dati riportati sul presente documento sono da ritenersi non vincolanti. L'azienda si riserva di apportare modifiche tecniche in qualsiasi momento.  
The specification shown in this document are to be considered non binding. The company reserves the right to make technical change at any moment.  
Die auf dieser Unterlage angegebenen technischen Daten sind als unverbindlich anzusehen. Die Firma behält sich das Recht vor zu jeder zeit technische Änderungen vorzunehmen.  
Les données techniques sur ce document ne doivent pas être considérées contraignantes. La société se réserve le droit d'apporter des modifications techniques à tout moment.  
Los datos técnicos indicados en el presente catalogo no son vinculantes. La empresa se reserva el derecho de efectuar modificaciones sin previo aviso.

# ELECTRIC DIRECT STEAM COMBI OVEN - 6 X 1/1 GN ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**CR1481600**

MODELLO  
**HOCM061E**

SERIE  
**Horizon III Slim**

## ACCESSORIES

CODE	MODELLO	DESCRIZIONE
RP04	<b>RP04</b>	SET OF CASTORS FOR STANDS, 2 OF WHICH WITH BRAKES
PLG5016	<b>PLG5016</b>	PLUG - 380 V - 16A - 5P
PAC061	<b>PAC061</b>	STAINLESS STEEL HEAT PROTECTION FOR SIDE WALL
NPF04	<b>NPF04</b>	FLANGED FEET KIT FOR SUPPORTS, FOR NAVAL INSTALLATIONS
KP004	<b>KP004</b>	FOOT KIT - 150 MM H
KFIC061E	<b>KFIC061E</b>	PULL-OUT BUILT-IN OVEN KIT, WITH INTEGRATED EXTRACTOR HOOD 1N-AC230 V - 3.0 KW.
ICLD	<b>ICLD</b>	HAND SHOWER COMPLETE WITH FITTINGS AND CONNECTIONS
CSR061	<b>CSR061</b>	STAINLESS STEEL BASE SUPPORT - FULL AISI 304
CPT061	<b>CPT061</b>	TRAY HOLDER - INSERTABLE ON SUPPORT - FULL AISI 304
CPD061	<b>CPD061</b>	STAINLESS STEEL TABLE TOP - INSERTABLE ON SUPPORT
CKO061SE	<b>CKO061SE</b>	SUCTION HOOD
CKO061E	<b>CKO061E</b>	EXTRACTOR HOOD WITH AIR CONDENSER - CAN ONLY BE USED ON PRE-FITTED OVENS
CIN061	<b>CIN061</b>	COOLING AIR CONVEYOR FOR RECESSED INSTALLATION.
CBL5015	<b>CBL5015</b>	CABLE - 3 MT - 5 X 1,5 MMQ
CAN061	<b>CAN061</b>	NEUTRAL CABINET WITH TRAY HOLDER - INSERTABLE ON STAND - FULL AISI 304
KCOE061	<b>KCOE061</b>	HORIZON III SLIM OVERLAY KIT
PCSM	<b>PCSM</b>	FLOWMETER 10-100
PCSK	<b>PCSK</b>	PURITY C STEAM FILTER HEAD KIT
PCSF	<b>PCSF</b>	PURITY C STEAM 1100 CARTRIDGE
CCE	<b>CCE</b>	HOOD MANIFOLD FOR EXTERNAL CONNECTION - Ø 150 MM
ICFX01	<b>ICFX01</b>	FAT FILTER

ELECTRIC DIRECT STEAM COMBI OVEN - 6 X 1/1 GN  
ELECTROMECHANICAL CONTROLS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....


















CODICE  
CR1481600

MODELLO  
HOCM061E

SERIE  
Horizon III Slim

OPTIONAL

MODELLO	DESCRIZIONE
 NPS	OPPOSITE DOOR
 NPK	PREARRANGEMENT FOR SUCTION HOOD CONNECTION
 MKC061	MARINE VERSION KIT - TO BE REQUESTED WHEN ORDERING
 SN	ENERGY OPTIMIZATION SUPPLEMENT, FOR ELECTRIC MODELS ONLY
 APDS	SECURITY DOOR OPENING WITH DOUBLE CLICK
 TS-CI-061RE-F50	3-AC 480 V - 50 HZ
 TS-CI-061RE-E50	3N-AC 440 V - 50 HZ
 TS-CI-061RE-D50	3-AC 440 V - 50 HZ
 TS-CI-061RE-C50	3-AC 400 V - 50 HZ
 TS-CI-061RE-A50	1N-AC 230 V - 50 HZ
 TS-CI-061RE-F60	3-AC 480 V - 60 HZ
 TS-CI-061RE-E60	3N-AC 440 V - 60 HZ
 TS-CI-061RE-D60	3-AC 440 V - 60 HZ
 TS-CI-061RE-C60	3-AC 400 V - 60 HZ
 TS-CI-061RE-A60	1N-AC 230 V - 60 HZ