

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C) TOP WITH SPLASHBACK

Project
Rev.:
Zone:
Location:



CODICE
BN26WC0022103LB

MODELLO
BOW03PA

SERIE
REFRIGERATED
TABLES

GENERAL CHARACTERISTICS

Baron refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed delicatessen products, thanks also to an automatic door closing system with magnetic gasket.



TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fuller telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

Removable condensing unit.

REFRIGERATION UNIT

Out-of-cell evaporator for greater loading convenience

Ducted ventilation system to even out internal temperature

Evaporators with cathodic treatment

CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Hot gas defrost system (onboard motor versions)

Electric defrost (on predisposed versions)

Automatic condensate evaporation device without the need for any electricity

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C) TOP WITH SPLASHBACK

Project
Rev.:
Zone:
Location:



CODICE
BN26WC0022103LB

MODELLO
BOW03PA

SERIE
REFRIGERATED
TABLES

Technical Information

| SPECIFICATION | DATA |
|-----------------------|--|
| MATERIAL | BN26WC0022103LB |
| DEFINITION | BOW03PA R290DX TNN PSPSPD C/A 50SV BAR |
| SUPPLY | ELECTRICS |
| DIM. WIDTH | 1735 mm |
| DIM. PRODUCTIVITY | 700 mm |
| DIM. HEIGHT | 950 mm |
| NET WEIGHT | 140 Kg |
| VOLUME (net) | 1.153775 |
| PACKAGE LENGTH | 1780 mm |
| PACKAGE WIDTH | 750 mm |
| PACKAGING HEIGHT | 1060 mm |
| PACKAGE VOLUME | 1,415 m3 |
| GROSS PACKING WEIGHT | 150.2 Kg |
| STANDARD POWER SUPPLY | 220-240V 1N |
| FREQUENCY | 50Hz |
| ELECTRICAL POWER | 0.33 kW |
| GAS/REFRIGERANT TYPE | R134a |
| IP GRADE | IPX4 |
| CAPACITY | 369 |

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C) TOP
WITH SPLASHBACK


Project
Rev.:
Zone:
Location:



CODICE
BN26WC0022103LB

MODELLO
BOW03PA

SERIE
REFRIGERATED
TABLES

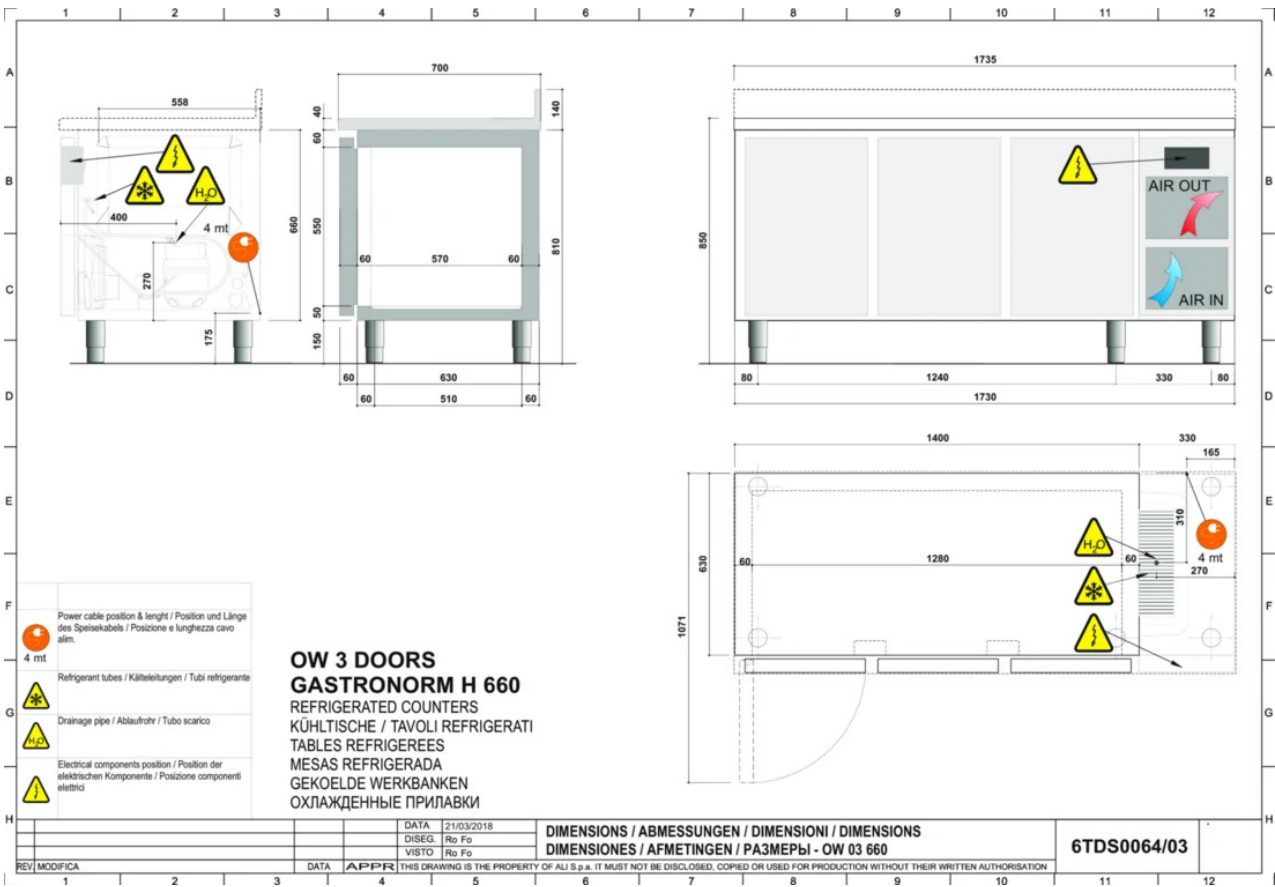

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C) TOP WITH SPLASHBACK

Project
Rev.:
Zone:
Location:



CODICE
BN26WC0022103LB

MODELLO
BOW03PA

SERIE
REFRIGERATED
TABLES

PRODUCT'S RANGE PLUS



Ease of programming and immediate accessibility. The solution for quick and easy use.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.



Full extension drawers with special Filterer stainless steel telescopic slides