

EXCELSIOR PLUS CANOPY - BPEX14BPEXHRIIDA

Project
Rev.:
Zone:
Location:



CODICE
BND212067

MODELLO
BPEX14BPEXHRIIDA

SERIE
WASHING

GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



TECHNICAL SPECIFICATIONS

We have simply combined the highest technical specifications and the latest technology with the name and time-tested features. EXCELSIOR PLUS is our answer to the new high standards of hygiene and cleanliness in the world market, while keeping our operating costs as low as ever.

Thanks to the Rinse system. HYGIENE + cycle ensures safe working while maintaining the highest levels of hygiene.

Reduced consumption of water, detergent, rinse aid and electricity thanks to the innovative optimised rinse system.

23 wash cycles, of which 6 with partial and 2 with total wash water discharge.

The ENERGY RECOVERY system recovers the steam produced by the running machine to preheat the cold feed water.

PLUS SYSTEM Rinsing at constant temperature and water pressure.

EXCELSIOR PLUS CANOPY - BPEX14BPEXHRIIDA

Project
Rev.:
Zone:
Location:



CODICE
BND212067

MODELLO
BPEX14BPEXHRIIDA

SERIE
WASHING

Technical Information

SPECIFICATION	DATA
MATERIAL	BND212067
DEFINITION	BPEX14BPEXHRIIDA LAVAST.CAPOTTA EL. 500
DIM. WIDTH	720 mm
DIM. PRODUCTIVITY	735 mm
DIM. HEIGHT	1445 mm
NET WEIGHT	144 Kg
PACKAGE LENGTH	760 mm
PACKAGE WIDTH	840 mm
PACKAGING HEIGHT	1750 mm
PACKAGE VOLUME	1,117 m3
GROSS PACKING WEIGHT	160 Kg
STANDARD POWER SUPPLY	380-415V 3N
BASKET SIZE	500x500 mm
WASH CYCLES	H+/50/90/120/180/300 sec
WASH PUMP	900W
WATER CONSUMPTION	3,5 lt

EXCELSIOR PLUS CANOPY - BPEX14BPEXHRIIDA



Project
Rev.:
Zone:
Location:



CODICE
BND212067


MODELLO
BPEX14BPEXHRIIDA

SERIE
WASHING

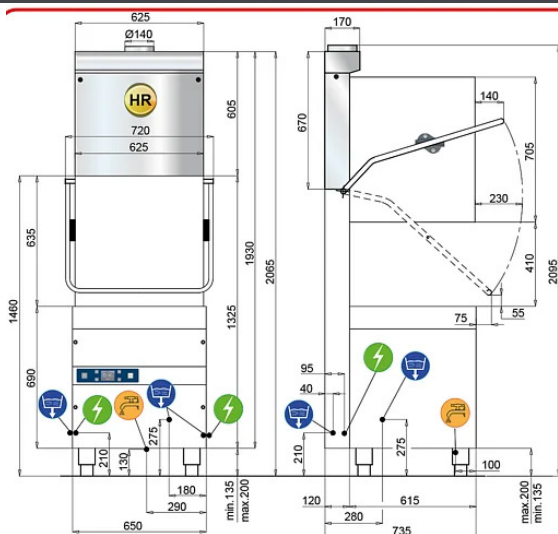

	ENTRATA ACQUA 3/4" GAS
	SCARICO ACQUA Ø24mm
	ALLACCIAMENTO ELETTRICO

Dati e figure

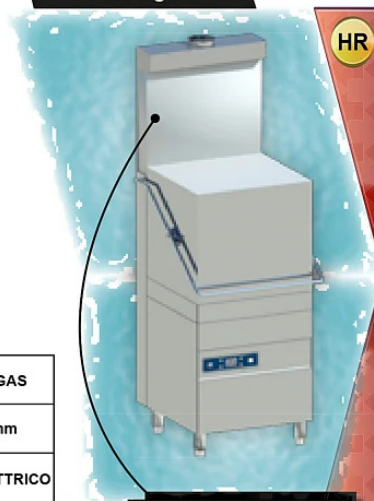

DATI TECNICI

DIMENSIONI ESTERNE

larghezza	720 mm
profondita'	735 mm
altezza(piedino avvitato)	2095 mm
PESO NETTO (versione base)	145 kg
TENSIONE DI ALIMENTAZIONE	400V 3N 50Hz
POTENZA MASSIMA ASSORBITA	9900 W
DUREZZA ACQUA	< 8 °F
CONDUCIBILITA' ACQUA	> 200 µS/cm
PRESSIONE ACQUA ALIMENTAZIONE	200-400 kPa

TEMPERATURA ARIA
IN USCITA:
25°C

UMIDITÀ:
60%

PORTATA D'ARIA:
105 m³/h

RECUPERO ORARIO:
6 kW/h
(DATI CALCOLATI SUL
CICLO PIÙ CORTO)

ALTEZZA UTILE & CESTI

diametro piatti 410 mm

vassoi GASTRONORM 1/1 (530x325)

DIMENSIONE CESTI 500X500 mm

DOTAZIONE CESTI 2XC40 - 1XC44 - 2X15060

N° CICLI (sec) 0(21÷680)(**) H+ 1 (50) 2 (90) 3(120) 4(180) 5(300)

ALIMENTAZIONE ACQUA 10°C

produzione cesti(*) Cesti/h / 5 45 40 30 20 12

CONSUMO ACQUA PER CICLO 3.5 L

CAPACITA' BOILER 15 L

RESISTENZA BOILER 9000 W

SET. TEMPERATURA RISCIAQUO 70°C÷90°C(**) 87°C 82°C

CAPACITA' VASCA 20 L

RESISTENZA VASCA 2700 W

SET. TEMPERATURA VASCA 50°C÷70°C(**) 65°C 60°C

POTENZA POMPA lavaggio/risciacquo 900W (500 L/min***)/250 W

pompa scarico 25 W (40 L/min***)

RUMOROSITA' 63.6±0.7 dB(A)

(*) TERMOSTOP DI SERIE / (***) PORTATA MASSIMA / (**) CICLO PERSONALIZZATO / (H+) 600" con 65°C in vasca

¹⁾ In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGE 1 / 1


PRODUCT'S RANGE PLUS



Immediate savings of 35 percent on energy consumption and improved temperature in the working environment, no longer saturated by the humidity produced by the machine.



Reduced consumption of water, detergent, rinse aid and electricity thanks to the innovative optimised rinse system



PLUS SYSTEM Rinsing at constant temperature and water pressure



8 wash cycles, of which 6 with partial and 2 with total wash water discharge



The ENERGY RECOVERY system recovers the steam produced by the running machine to preheat the cold feed water.