

# HYPER TECH WASH PLUS - BPHTW3SPLUS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BND212091

MODELLO  
BPHTW3SPLUS

SERIE  
WASHING

## GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



## TECHNICAL SPECIFICATIONS

The new technology of potwashers allows you to easily and intuitively follow all the stages of your potwashing process directly from the control panel. The innovative rinsing circuit, the energy saving function (a device that optimises energy functions avoiding unnecessary waste) the high

level of performance and the high quality materials make these machines extremely competitive and versatile.

# HYPER TECH WASH PLUS - BPHTW3SPLUS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**BND212091**

MODELLO  
**BPHTW3SPLUS**

SERIE  
**WASHING**

## Technical Information

SPECIFICATION	DATA
MATERIAL	BND212091
DEFINITION	BPHTW3SPLUS LAVAGGETTI EL. 85X72,5
DIM. WIDTH	1050 mm
DIM. PRODUCTIVITY	950 mm
DIM. HEIGHT	1940 mm
NET WEIGHT	222 Kg
PACKAGE LENGTH	1050 mm
PACKAGE WIDTH	950 mm
PACKAGING HEIGHT	1940 mm
PACKAGE VOLUME	1,935 m3
GROSS PACKING WEIGHT	245 Kg
STANDARD POWER SUPPLY	380-415V 3N
ELECTRICAL POWER	13.4 kW
BASKET SIZE	850x725 mm
WASH CYCLES	3/6/9/12 min
WASH PUMP	2180W
WATER CONSUMPTION	4,3 lt

# HYPER TECH WASH PLUS - BPHTW3SPLUS


Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BND212091

MODELLO  
BPHTW3SPLUS

SERIE  
WASHING

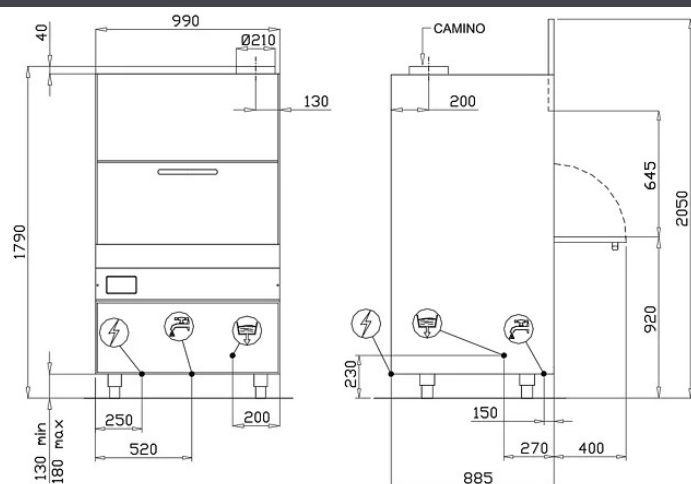

	ENTRATA ACQUA 3/4" GAS
	SCARICO ACQUA Ø 32mm
	ALLACCIAMENTO ELETTRICO

DATI TECNICI				
DIMENSIONI ESTERNE				
larghezza	990 mm			
profondita'	885 mm			
altezza(piedino avvitato)	1790/2050(porta aperta) mm			
PESO NETTO (versione base)	221 kg			
TENSIONE DI ALIMENTAZIONE	400V 3N 50Hz			
POTENZA MASSIMA ASSORBITA	13360 W			
DUREZZA ACQUA	2-8 °F			
PRESSIONE ACQUA ALIMENTAZIONE	200-400 kPa			
ALTEZZA UTILE & CESTI				
altezza utile	645 mm			
DIMENSIONE CESTI				
850x725 mm				
DOTAZIONE CESTI				
1XC86/A - 1XC97/A - 1X92100				
N° CICLI (minuti)	1 (3)	2 (6)	3 (9)	4 (12)
ALIMENTAZIONE ACQUA 55°C				
produzione cesti(*) <sup>(1)</sup> Cesti/h	20	10	6	5
ALIMENTAZIONE ACQUA 10°C				
produzione cesti(*) <sup>(1)</sup> Cesti/h	20	10	6	5
CONSUMO ACQUA PER CICLO	4,3 L			
CAPACITA' BOILER	20 L			
RESISTENZA BOILER	9000 W			
SET. TEMPERATURA RISCIAQUO	85°C			
CAPACITA' VASCA	78 L			
RESISTENZA VASCA	6000 W			
SET. TEMPERATURA VASCA	55°C			
POTENZA POMPA LAVAGGIO	2180 W (810 l/min <sup>***</sup> ) x 2			
POTENZA POMPA RISCIAQUO	250 W (150 l/min <sup>***</sup> )			
pompa scarico (opzionale)	190 W (120 l/min <sup>***</sup> )			
LIVELLO DI PRESSIONE ACUSTICA	71,1 dB(A)			

(\*) CON TERMOSTOP DI SERIE

(\*\*\*) PORTATA MASSIMA

(1) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1

## HYPER TECH WASH PLUS - BPHTW3SPLUS

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BND212091


MODELLO  
BPHTW3SPLUS

SERIE  
WASHING

# PRODUCT'S RANGE PLUS



Stabilized pressure rinsing and constant boiler water temperature of 85°C. Thanks to the atmospheric boiler, mixing of mains water in the rinse phase is avoided. The PLUS system also ensures greater control and correct dosing of rinse aid in each cycle.



Fully molded basin. Independent stainless steel wash/rinse arms



Double-walled door