

# INDIRECT GAS BOILING PAN 50lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356169

MODELLO  
Q70NP/GI650S

SERIE  
QUEEN 7

## GENERAL CHARACTERISTICS

For those who do not want to give up the quality and solidity of a Queen stove, the Series 7 offers a 700 mm depth and more compact dimensions to fit any room, burners available in various configurations and wattages, enhanced by the refined Scotch Brite finish.

Thanks to its extreme compositional freedom, every composition is possible: you can combine Model i tops with accessorizable oven and neutral bases and hygienic finishes; create customized solutions by matching and attaching equipment back to back, sideways "flush" perfectly sealed, or "bridge" structures, offering high-level solutions that always perfectly meet the chef's needs.

As a total guarantee, all equipment that make up a Queen7 kitchen are certified in compliance with international standards, including CE, GAR, AGA and others.



## TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with 2 mm thickness

AISI 304 stainless steel tanks with AISI 316 bottom.

Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.

Frontal drain by means of 2" chrome-plated brass faucet.

Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).

Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.

Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

# INDIRECT GAS BOILING PAN 50lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356169

MODELLO  
Q70NP/GI650S

SERIE  
QUEEN 7

## Technical Information

| SPECIFICATION            | DATA                                     |
|--------------------------|--|
| MATERIAL                 | CR1356169                                |
| DEFINITION               | Q70NP/GI650 S PEN. GAS M60 IND.C/VAL 50L |
| COMMERCIAL LINE          | QUEEN                                    |
| SUPPLY                   | MIXED                                    |
| DIM. WIDTH               | 600 mm                                   |
| DIM. PRODUCTIVITY        | 700 mm                                   |
| DIM. HEIGHT              | 870 mm                                   |
| NET WEIGHT               | 88 Kg                                    |
| VOLUME (net)             | 0.365                                    |
| PACKAGE LENGTH           | 640 mm                                   |
| PACKAGE WIDTH            | 870 mm                                   |
| PACKAGING HEIGHT         | 1100 mm                                  |
| PACKAGE VOLUME           | 0,700 m3                                 |
| GROSS PACKING WEIGHT     | 99 Kg                                    |
| STANDARD POWER SUPPLY    | 220-240V 1N                              |
| FREQUENCY                | 50 Hz                                    |
| ELECTRICAL POWER         | 0.275 kW                                 |
| GAS POWER                | 10.5                                     |
| GAS POWER (G25.3/25mbar) | 10,00                                    |
| IP GRADE                 | IPX4                                     |
| CAPACITY                 | 50 litri                                 |
| CERTIFIED MODEL          | Q70NP/GI650                              |

INDIRECT GAS BOILING PAN 50lt - WITH AUTOMATIC  
CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1356169

MODELLO  
Q70NP/GI650S

SERIE  
QUEEN 7

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm- MESURES EN cm  
MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

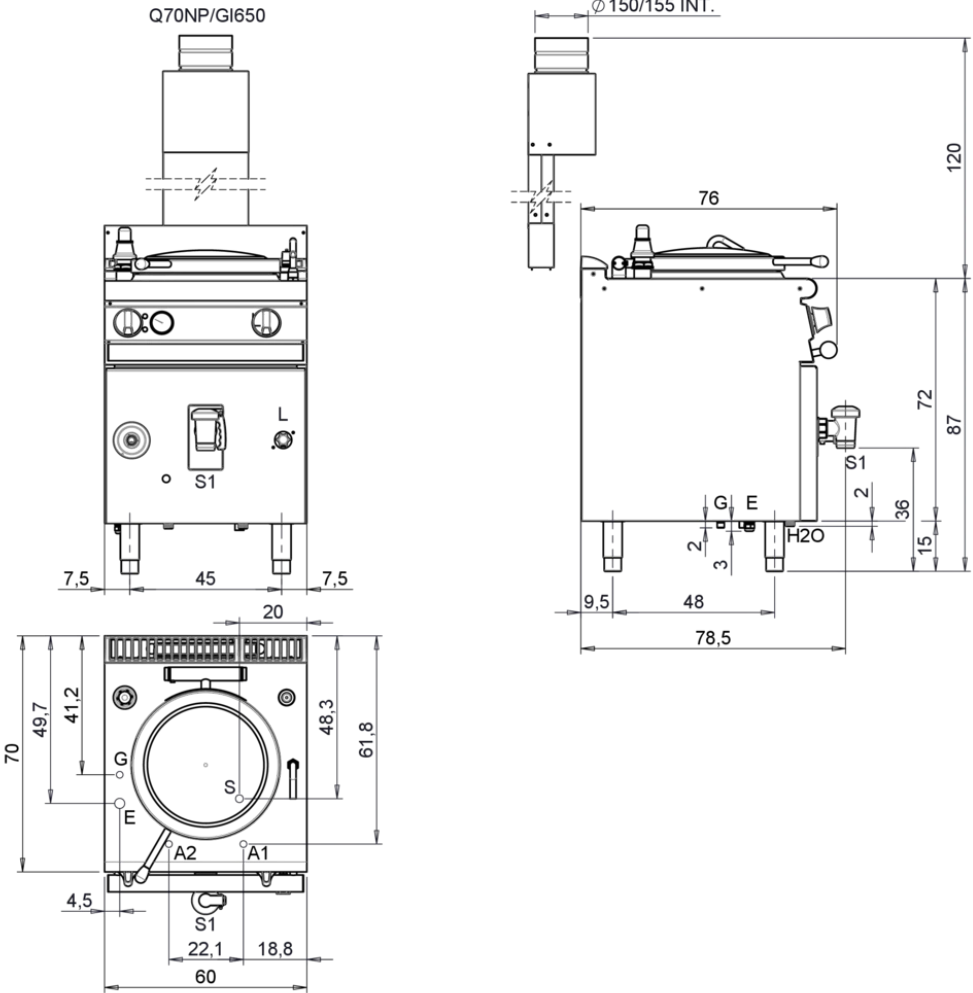

| Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda   |   |
|---|---|
| <b>E</b> Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico   | <b>G</b> Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás<br><b>EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)</b> |
| <b>S</b> Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água<br><b>EN ISO 228-1 G 3/4</b>   | <b>H20</b> Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting - Junção alimentação água                                  |
| <b>S1</b> Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba  | <b>A1</b> = Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno<br><b>A2</b> = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio<br><b>EN ISO 228-1 G3/4</b>   |
| <b>S2</b> Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresi3n - Onderdrukklep - Válvula de depress3o  | <b>L</b> Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel                                       |
| <b>S3</b> Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto |   |
| <b>S4</b> Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulaç3o de dreno   |   |

# INDIRECT GAS BOILING PAN 50lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356169

MODELLO  
Q70NP/GI650S

SERIE  
QUEEN 7

## PRODUCT'S RANGE PLUS



Indirect pot drain valve.  
The valve has a dual function  
- recharges the pressure inside the  
cavity  
- allows automatic water  
condensate discharge



Stainless steel tank with aisi 316  
bottom



Possibility of hot or cold water  
loading

# INDIRECT GAS BOILING PAN 50lt - WITH AUTOMATIC CONDENSATE DRAIN VALVE

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1356169

MODELLO  
Q70NP/GI650S

SERIE  
QUEEN 7

## ACCESSORIES

| CODE       | MODELLO | DESCRIZIONE  |
|------------|---------|--|
| MA97347000 | 9C5     | COLANDER BASKET  |
| MA97348000 | 9CV5    | VEGETABLE STRAINER BASKET FOR POT                        |
| CR0599730  | 7C8     | COLAPASTA BASKET - 80 Lt. HOLES Ø 3 MM - 1 SECTOR        |
| CR0599740  | 7CV8    | COOLING BOWL FOR POTS - 80 Lt. HOLES Ø 6 MM - 1 SECTOR   |
| MA97349000 | 9-I5    | POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM |