

ELECTRIC SOLID TOP ON ELECTRIC OVEN

Project
Rev.:
Zone:
Location:



CODICE
CR1016319

MODELLO
Q90TPF/EE800

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Chrome molybdenum polished steel cooking plate 1.8 cm thick that is crushproof at high temperatures and also suitable for direct cooking. Perimeter grease collection gutter with drain hole.

Plate heating (4 zones) by means of 4 kw heating elements.

Temperature control of heating elements by thermostat, operated by means of ergonomic recessed and inclined knobs.

Electric oven

Groups of stainless steel heating elements placed on the ceiling and under the sole of the firing chamber.

Thermostatic temperature control in the chamber from 100°C to 300°C.

Various connection possibilities.

Warning light indicating "equipment under voltage."

Indicator light indicating that the set temperature has been reached.

4 independent cooking zones.

Adjustable temperature

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC SOLID TOP ON ELECTRIC OVEN

Project
Rev.:
Zone:
Location:



CODICE
CR1016319

MODELLO
Q90TPF/EE800

SERIE
QUEEN 9

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1016319
DEFINITION	Q90TPF/EE800 TUTTAPIASTRA ELE C/FORNO
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	208 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	223 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	22 kW
N. FIRES/PLATES	QUATTRO FUOCHI
IP GRADE	IPX4
CERTIFIED MODEL	Q90TPF/EE800

ELECTRIC SOLID TOP ON ELECTRIC OVEN

Project
 Rev.:
 Zone:
 Location:




CODICE
CR1016319

MODELLO
Q90TPF/EE800

SERIE
QUEEN 9

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm - MESURES EN cm
 MEDIDAS EN cm - MATEN IN cm - DIMENSIONES EN cm

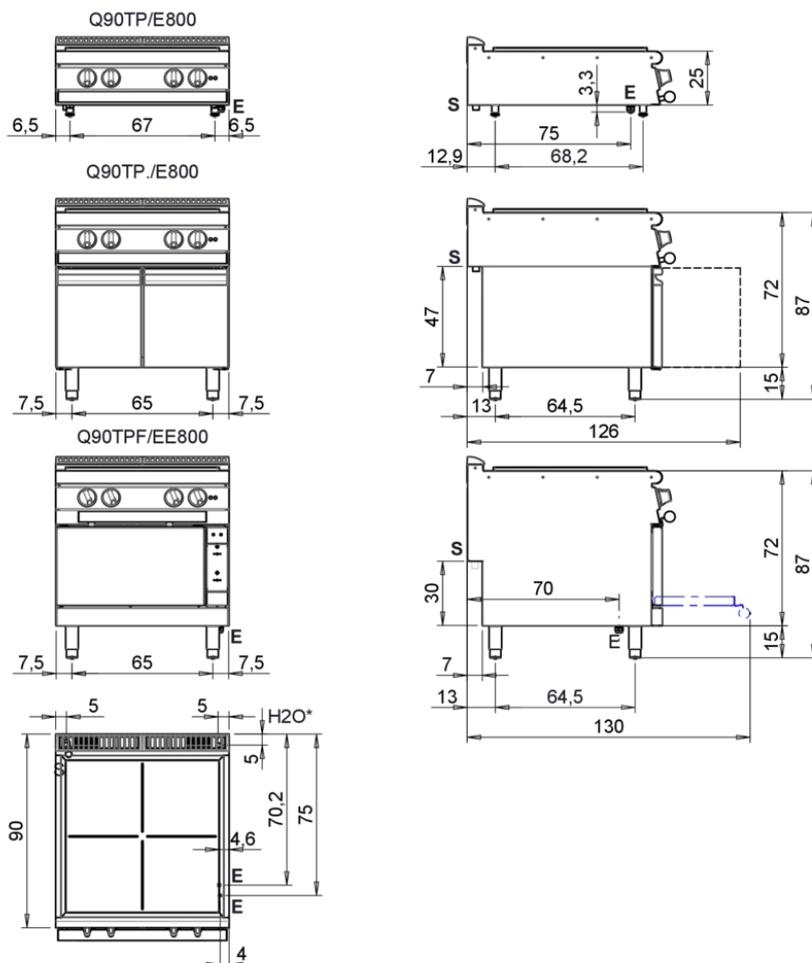

Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda

E	Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico	G	Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás
S	Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero - Wateraftapaansluiting - Junção descarga água EN ISO 228-1 G1	H20	Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água
S1	Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba	A1 =	Calda - Heiss - Warm - Chaude - Caliente - Warm - Morno
S2	Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão	A2 =	Fredda - Kalt - Cold - Froid - Fria - Koude - Frio EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
S3	Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double envelope - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto	L	Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nivel - Niveaakraan - Torneira de nivel
S4	Scarico - Abflussrohr - Drain - Tuyau d'évacuation - Tubo de drenaje - Aftapbuis - Tubulação de dreno		

ELECTRIC SOLID TOP ON ELECTRIC OVEN

Project
Rev.:
Zone:
Location:



CODICE
CR1016319

MODELLO
Q90TPF/EE800

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Cantilevered plate with perimeter grease trough with drain hole.



4 independent cooking zones.



Temperature regulation from 50 to 400 °C