

ELECTRIC BOILING PAN DIRECT HEATING - 150 LT

Project
Rev.:
Zone:
Location:



CODICE
CR1018109

MODELLO
Q90PF/ED150

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with a thickness of 2 mm.

AISI 304 stainless steel tanks with AISI 316 bottom.

Water loading by means of 2 solenoid valves, with the possibility of loading cold or hot water.

Frontal drain by means of 2" chrome-plated brass faucet.

Gas version: heating by means of 2 AISI 304 steel burners, positioned at the bottom of the vessel (direct heating) or in the cavity (indirect heating).

Indirect electric version: heating with 2 sets of armoured heating elements positioned inside the cavity.

Direct electric version: heating by means of 3 stainless steel heating elements positioned externally on the bottom of the container.

Stainless steel tank with aisi 316 bottom

Possibility of hot or cold water loading

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC BOILING PAN DIRECT HEATING - 150 LT

Project
Rev.:
Zone:
Location:



CODICE
CR1018109

MODELLO
Q90PF/ED150

SERIE
QUEEN 9

Technical Information

| SPECIFICATION | DATA |
|-----------------------|---------------------------------------|
| MATERIAL | CR1018109 |
| DEFINITION | Q90PF/ED150 PENTOLA EL.M80 DIR.150 LT |
| COMMERCIAL LINE | QUEEN |
| SUPPLY | ELECTRICS |
| DIM. WIDTH | 800 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 870 mm |
| NET WEIGHT | 116 Kg |
| VOLUME (net) | 0.626 |
| PACKAGE LENGTH | 1070 mm |
| PACKAGE WIDTH | 840 mm |
| PACKAGING HEIGHT | 1240 mm |
| PACKAGE VOLUME | 1,115 m3 |
| GROSS PACKING WEIGHT | 134 Kg |
| STANDARD POWER SUPPLY | 380-415V 3N |
| FREQUENCY | 50-60 Hz |
| ELECTRICAL POWER | 12 kW |
| IP GRADE | IPX5 |
| CAPACITY | 150 |
| CERTIFIED MODEL | Q90PF/ED150 |

ELECTRIC BOILING PAN DIRECT HEATING - 150 LT

Project
 Rev.:
 Zone:
 Location:






CODICE
 CR1018109

MODELLO
 Q90PF/ED150

SERIE
 QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION -
 ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
 MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

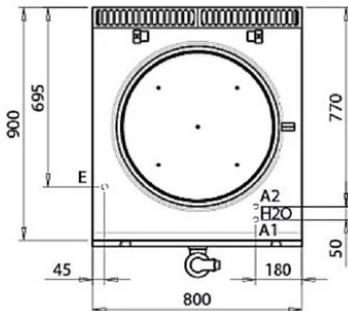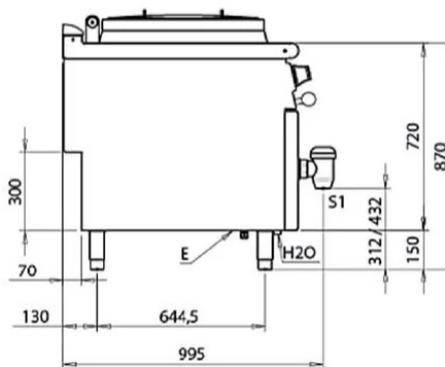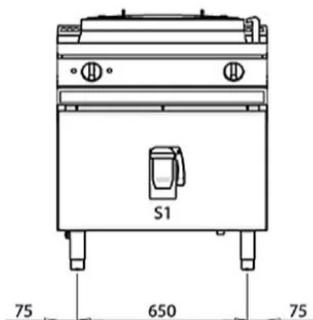

Q90PF/ED...

Legenda - Legende - Key - Légende - Leyenda - Legenda

- H20 Attacchi arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de agua - Wateraansluiting
- A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm EN ISO 228-1 G 3/4
- A2 = Fredda - Kalt - Cold - Froid - Fria - Koude EN ISO 228-1 G 3/4
- E Pressacavo entrata linea elettrica - Sopfbuchse - Electric cable stress relief
 Presse étoupe de câble él. - Elektrische kabelwartel
- S1 Scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desaguadero -
 Waterafwaansluiting 2"

ELECTRIC BOILING PAN DIRECT HEATING - 150 LT

Project
Rev.:
Zone:
Location:



CODICE
CR1018109

MODELLO
Q90PF/ED150

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Indirect pots with automatic cavity
condensate drain valve
The valve has a dual function
- recharges the pressure inside the
interspace
- allows automatic water
condensate discharge



Stainless steel tank with aisi 316
bottom



Possibility of hot or cold water
loading

ELECTRIC BOILING PAN DIRECT HEATING - 150 LT

Project
Rev.:
Zone:
Location:



CODICE
CR1018109

MODELLO
Q90PF/ED150

SERIE
QUEEN 9

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|------------|---------|--|
| MA97347000 | 9C5 | COLANDER BASKET |
| MA97348000 | 9CV5 | VEGETABLE STRAINER BASKET FOR POT |
| MA97350900 | 9C10 | COLANDER BASKET |
| MA97351000 | 9C15 | COLANDER BASKET |
| MA97352000 | 9CV10 | VEGETABLE STRAINER BASKET FOR POT |
| MA97353000 | 9CV15 | VEGETABLE STRAINER BASKET FOR POT |
| MA97354000 | 9-I10 | FUNNEL FOR POT DISCHARGE |
| MA97355000 | 9-I15 | FUNNEL FOR POT DISCHARGE |
| MA97349000 | 9-I5 | POWDER DISCHARGE INSTALLATION-50 Lt. HOLES Ø 10-15-36 MM |