

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project
Rev.:
Zone:
Location:



CODICE
CR1018299

MODELLO
Q90CP/E400

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Cooking tanks made of AISI 316 stainless steel (an alloy with exceptional corrosion resistance even at high temperatures) of large capacity (42 liters), molded with inner radiused corners for maximum hygiene and cleanability, dotat ion of foam expansion, with residual starch discharge device.

Safety thermostat in tank against dry running.

Gas models

Safety pressure switch to prevent empty tank operation.

Stabilized flame burners with piezo ignition of the pilot burner.

Safety tap with thermocouple and progressive adjustment of power output independently for each tank.

Electric models

Armored stainless steel heating elements inserted into the tank.

Thermal protectors of the heating unit.

Multi-position, independent power regulator for each tank.

Safety pressure switch to prevent activation of heating without water in the tank.

Non-accessible internal compartment for total user safety, closed with door for aesthetic alignment. Version with fixed panel closure available.

Manual water loading, without the use of an electrical connection

In the electric version, the heating element can be rotated by more than 90°.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project
Rev.:
Zone:
Location:



CODICE
CR1018299

MODELLO
Q90CP/E400

SERIE
QUEEN 9

Technical Information

| SPECIFICATION | DATA |
|-----------------------|---------------------------------------|
| MATERIAL | CR1018299 |
| DEFINITION | Q90CP/E400 CUOCIPASTA EL. 1V.40LT M40 |
| COMMERCIAL LINE | QUEEN |
| SUPPLY | ELECTRICS |
| DIM. WIDTH | 400 mm |
| DIM. PRODUCTIVITY | 900 mm |
| DIM. HEIGHT | 870 mm |
| NET WEIGHT | 51 Kg |
| VOLUME (net) | 0.313 |
| PACKAGE LENGTH | 440 mm |
| PACKAGE WIDTH | 1020 mm |
| PACKAGING HEIGHT | 1160 mm |
| PACKAGE VOLUME | 0,522 m3 |
| GROSS PACKING WEIGHT | 61 Kg |
| STANDARD POWER SUPPLY | 380-415V 3N |
| FREQUENCY | 50-60 Hz |
| ELECTRICAL POWER | 8.5 kW |
| MINIMUM PRESSURE | 150 |
| MAXIMUM PRESSURE | 500 |
| IP GRADE | IPX5 |
| CAPACITY | 42 litri |
| CERTIFIED MODEL | Q90CP/E400 |

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project
Rev.:
Zone:
Location:




CODICE
CR1018299

MODELLO
Q90CP/E400

SERIE
QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - INSTALLATIONSRIJNINGAR

MISURE IN cm - DIMENSIONS IN cm - ABMESSUNGEN IN cm
MESURES EN cm - MEDIDAS EN cm - MATEN IN cm

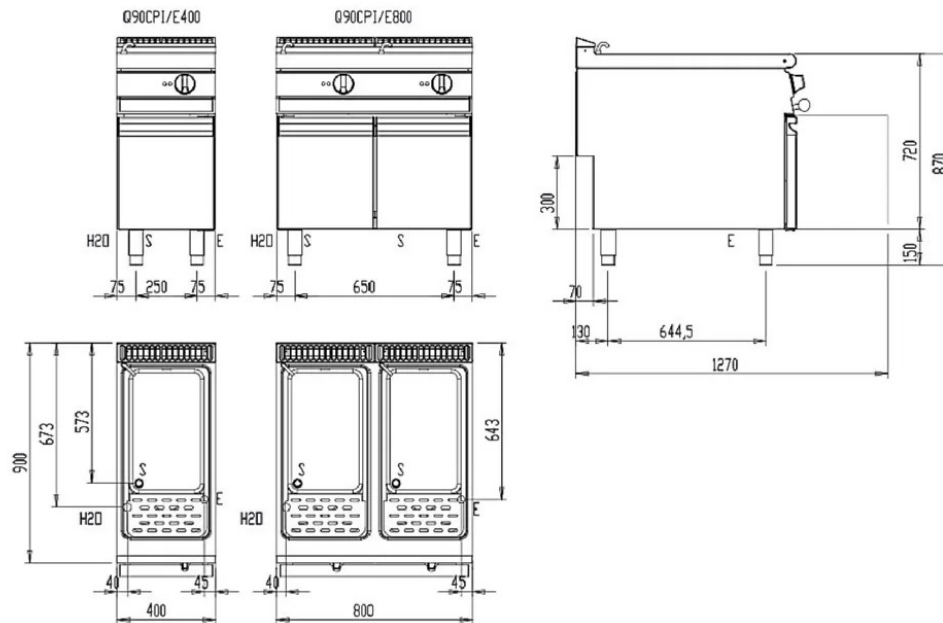

| Legenda - Legende - Key - Légende - Leyenda - Legenda - Legenda | |
|--|---|
| E Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief - Presse étoupe de câble él - Pisacable - Elektrische kabelwartel - Entrada cabo eléctrico | G Arrivo gas - Gasanschluss - Gas connection - Arrivée gaz - Union de gas - Gasaansluiting - Ligação gás EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK) |
| S Attacco scarico acqua - Wasserablauf - Water outlet - Vidange de l'eau - Desagüadero - Wateraftrapansluiting - Junção descarga água EN 10226-1 R1 | H2O Arrivo acqua - Wasseranschluss - Water inlet - Arrivée eau - Union de água - Wateraansluiting - Junção alimentação água |
| S1 Scarico vasca - Wannenabflussrohr - Pan outlet - Vidange du bac - Descarga cuba - Water toevoer - Descarga da cuba | A1 = Calda - Heiss - Warm - Chaude - Caliente - Warm - Momo A2 = Fredda - Kalt - Cold - Froid - Fria - Koude - Frio Ø=1 cm |
| S2 Valvola di depressione - Anti-depression valve - Unterdruck ventil - Soupape de dépression - Válvula de depresión - Onderdrukklep - Válvula de depressão | L Rubinetto di livello - Level tap - Wasserhahn - Robinet de niveau - Grifo de nível - Niveaakraan - Torneira de nível |
| S3 Scarico acqua intercapedine - Wasserablauf Zwischenraum - Jacket water drain Evacuation eau double enveloppe - Descarga de agua intersticios - Afvoer water tussenruimte - Descarga de água na marmitta com Sistema de aquecimento indirecto | |

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project
Rev.:
Zone:
Location:



CODICE
CR1018299

MODELLO
Q90CP/E400

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.



Safety pressure switch to prevent activation of heating without water in the tank.



Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.




Non-accessible internal compartment for total user safety, closed with door for aesthetic alignment. Version with fixed panel closure available.



Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.



Manual water loading, without the use of an electrical connection



The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

ELECTRIC PASTA COOKER 1 BOWL 40 L

Project
Rev.:
Zone:
Location:



CODICE
CR1018299

MODELLO
Q90CP/E400

SERIE
QUEEN 9

ACCESSORIES

| CODE | MODELLO | DESCRIZIONE |
|-----------|----------|---|
| CR0999149 | GFCP40 | 40Lt BOTTOM TANK GRID |
| CR0999179 | 9KIT-A | 40 LITRE TUB BASKET KIT |
| CR0999189 | 9KIT-B | 40 LITRE TUB BASKET KIT |
| CR0999199 | 9KIT-C | 40 LITRE TUB BASKET KIT |
| CR0999209 | 9KIT - D | KIT 3 GN1/3 STAINLESS STEEL BASKETS WITH SIDE HANDLES |
| CR0999219 | 9KIT - E | KIT 2 GN1/2 STAINLESS STEEL BASKETS WITH SIDE HANDLES |
| CR0999129 | CCP19 | BASKET GN1/9 FRONT HANDLE |
| CR0999169 | CVCP40 | 40 LITRE TANK LID |
| CR0999119 | CCP16S | BASKET GN1/6 LEFT HANDLE |
| CR0999109 | CCP16D | BASKET GN1/6 RIGHT-HAND HANDLE |
| CR0999099 | CCP13F | BASKET GN1/3 FRONT HANDLE |
| CR0999089 | CCP13L | BASKET GN1/3 SIDE HANDLE |
| CR0999079 | CCP12 | BASKET GN1/2 SIDE HANDLE |