

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C)

Project
Rev.:
Zone:
Location:



CODICE
BN26WC002210376

MODELLO
BOW03

SERIE
**REFRIGERATED
TABLES**

GENERAL CHARACTERISTICS

Baron refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed delicatessen products, thanks also to an automatic door closing system with magnetic gasket.



TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fuller telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

Removable condensing unit.

REFRIGERATION UNIT

Out-of-cell evaporator for greater loading convenience

Ducted ventilation system to even out internal temperature

Evaporators with treatment in cataphoresis

CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Hot gas defrost system (onboard motor versions)

Electric defrost (on predisposed versions)

Automatic condensate evaporation device without the need for any electricity

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C)

Project
Rev.:
Zone:
Location:



CODICE
BN26WC002210376

MODELLO
BOW03

SERIE
**REFRIGERATED
TABLES**

Technical Information

SPECIFICATION	DATA
MATERIAL	BN26WC002210376
DEFINITION	BOW03 R290DX TNN PSPSPD S/P BAR
DIM. WIDTH	1730 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	810 mm
NET WEIGHT	100 Kg
VOLUME (net)	0.98091
PACKAGE LENGTH	1780 mm
PACKAGE WIDTH	750 mm
PACKAGING HEIGHT	1060 mm
PACKAGE VOLUME	1,415 m3
GROSS PACKING WEIGHT	117 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50Hz
ELECTRICAL POWER	0.33 kW
GAS/REFRIGERANT TYPE	R134a
IP GRADE	IPX4
CAPACITY	369

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C)


Project
Rev.:
Zone:
Location:



CODICE
BN26WC002210376

MODELLO
BOW03

SERIE
REFRIGERATED
TABLES

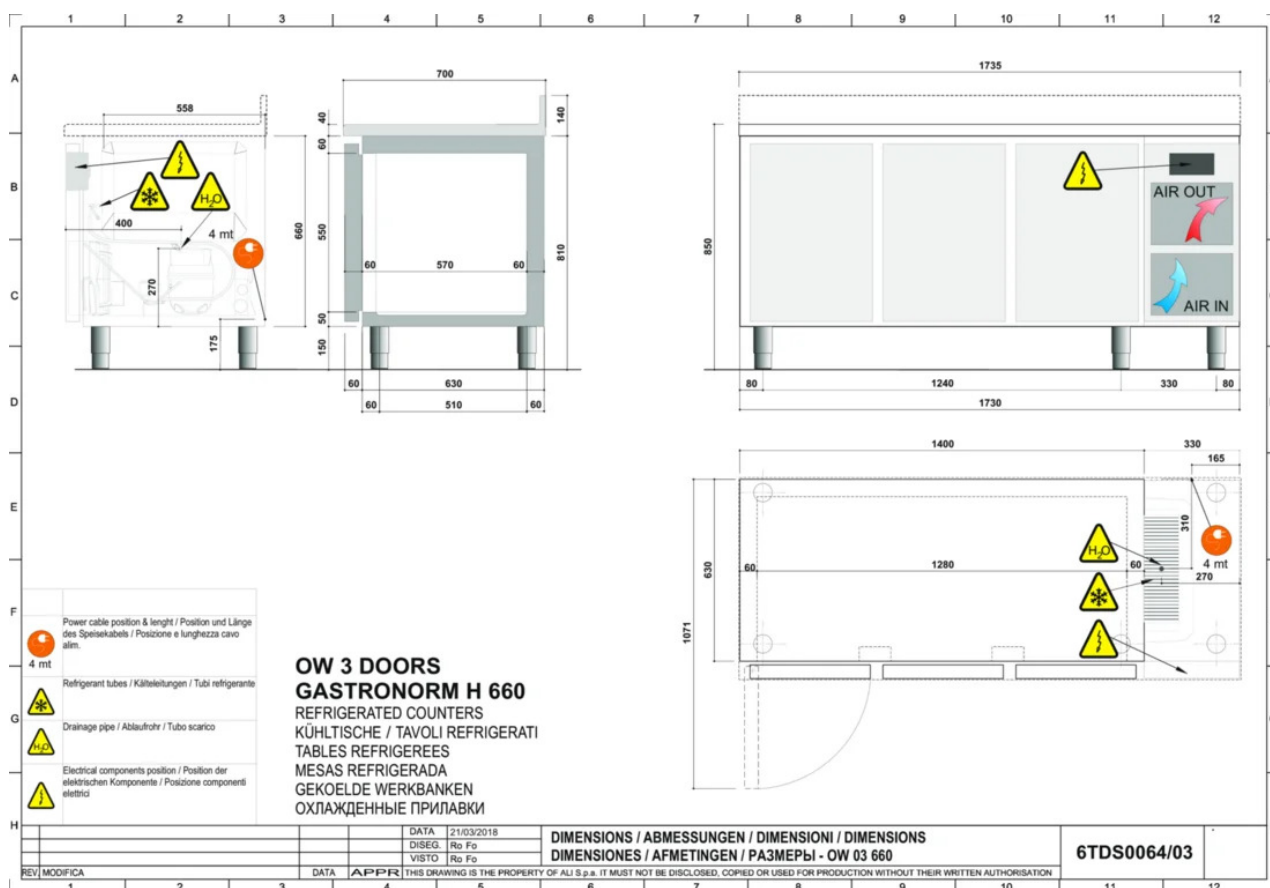

REFRIGERATED TABLE (3 DOORS TEMP -2/+8°C)

Project
Rev.:
Zone:
Location:



CODICE
BN26WC002210376

MODELLO
BOW03

SERIE
REFRIGERATED
TABLES

PRODUCT'S RANGE PLUS



Ease of programming and immediate accessibility. The solution for quick and easy use.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



The temperature uniformity throughout the refrigerated compartment is secured by a patented ventilation system using air channelling, aided by the absence of the evaporator in the compartment.



Full extension drawers with special Filterer stainless steel telescopic slides