

# REFRIGERATED TABLE ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
**BN26KK0022103LB**

MODELLO  
**BOK03PA**

SERIE  
**REFRIGERATED  
TABLES**

## GENERAL CHARACTERISTICS

Baron refrigerated tables, all certified for efficiency and quality, guarantee the perfect observation of raw materials, processed delicatessen products, thanks also to an automatic door closing system with magnetic gasket.



## TECHNICAL SPECIFICATIONS

Cell bottom printed with rounded corners and removable grid supports for the maximum degree of hygiene and load flexibility. Insulation thickness of 60 mm, made of high-density expanded polyurethane, completely free of CFC. Fully extractable drawers, thanks to special Fuller telescopic guides in stainless steel. Self-closing door with 100° opening lock. Lower hinge fixed frontally for installation on the plinth.

### REFRIGERATION UNIT

Evaporators positioned behind each door pillar to ensure uniform cold distribution

Evaporators with treatment in cataphoresis

### CONTROLS, MONITORING, AND SAFETY FEATURES:

Electronic control board with HACCP function

Hot gas defrost system (onboard motor versions)

Electric defrost (on predisposed versions)

Automatic evaporation device for condensate water without the need for electrical energy

# REFRIGERATED TABLE ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK0022103LB

MODELLO  
BOK03PA

SERIE  
REFRIGERATED  
TABLES

## Technical Information

SPECIFICATION	DATA
MATERIAL	BN26KK0022103LB
DEFINITION	BOK03PA R290DX TNN PSPSPD C/A 50SV BAR
SUPPLY	ELECTRICS
DIM. WIDTH	1735 mm
DIM. PRODUCTIVITY	700 mm
DIM. HEIGHT	950 mm
NET WEIGHT	100 Kg
VOLUME (net)	1.153775
PACKAGE VOLUME	1.45 m3
GROSS PACKING WEIGHT	117 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50Hz
ELECTRICAL POWER	0.35 kW
GAS/REFRIGERANT TYPE	R134a
IP GRADE	IPX4
CAPACITY	369

# REFRIGERATED TABLE ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK


Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK0022103LB

MODELLO  
BOK03PA

SERIE  
REFRIGERATED  
TABLES

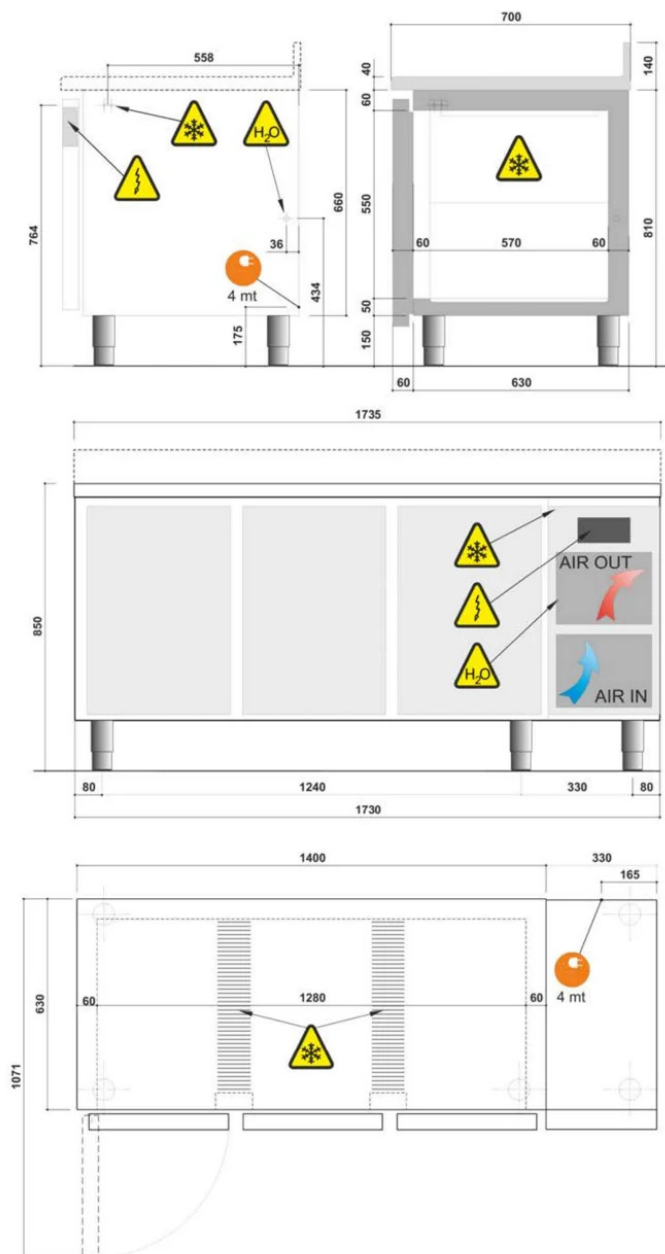

**OK 3 DOORS  
GASTRONORM H 660**  
REFRIGERATED COUNTERS  
KÜHLTISCHE / TAVOLI REFRIGERATI  
TABLES REFRIGEREES  
MESAS REFRIGERADA  
GEKOELDE WERKBANKEN  
ОХЛАЖДЕННЫЕ ПРИЛAVКИ

- Power cable position & length / Position und Länge des Speisekabels / Posizione e lunghezza cavo alim.
- Refrigerant tubes / Kälteleitungen / Tubi refrigeranti
- Drainage pipe / Ablaufrohr / Tubo scarico
- Electrical components position / Position der elektrischen Komponente / Posizione componenti elettrici

# REFRIGERATED TABLE ( 3 DOORS TEMP -2/+8°C ) TOP WITH SPLASHBACK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
BN26KK0022103LB

MODELLO  
BOK03PA

SERIE  
REFRIGERATED  
TABLES

## PRODUCT'S RANGE PLUS



Evaporators placed behind each door pillar to ensure uniformity in cold distribution.



Ease of programming and immediate accessibility. The solution for quick and easy use.



Capacitor protected by filters to ensure optimal operation over time.



Molded cell bottom with rounded edges and removable grid supports for maximum hygiene and loading flexibility.



Full extension drawers with special Filterer stainless steel telescopic slides