

TOTAL WASH PLUS - BPTW40T

Project
Rev.:
Zone:
Location:



CODICE
BND212028

MODELLO
BPTW40T

SERIE
WASHING

GENERAL CHARACTERISTICS

Professional dishwashers designed to meet the needs for efficient and rapid cleaning of dishes and utensils in commercial settings, such as restaurants, hotels, and similar food facilities.

Baron professional equipment is designed to handle a high volume of dishes and ensure high hygiene standards in commercial settings.



TECHNICAL SPECIFICATIONS

Double-wall glass and dishwashers. Designed to meet the needs of bars, restaurants, hotels, pubs. Recently renovated in their aesthetics, they are available in electromechanical and electronic versions. They are machines with a solid and reliable structure.

A wide variety of optional extras are available, including a water softener, detergent dispenser, drain pump, new surface filters, to adapt the

machine to the most diverse uses.

Printed basket runners

Lightweight composite impellers, efficient even at low mains pressure

TOTAL WASH PLUS - BPTW40T

Project
Rev.:
Zone:
Location:



CODICE
BND212028

MODELLO
BPTW40T

SERIE
WASHING

Technical Information

SPECIFICATION	DATA
MATERIAL	BND212028
DEFINITION	BPTW40T LAVAST. ELET. 400
DIM. WIDTH	460 mm
DIM. PRODUCTIVITY	545 mm
DIM. HEIGHT	715 mm
NET WEIGHT	45.5 Kg
PACKAGE LENGTH	530 mm
PACKAGE WIDTH	620 mm
PACKAGING HEIGHT	820 mm
PACKAGE VOLUME	0,269 m3
GROSS PACKING WEIGHT	50 Kg
STANDARD POWER SUPPLY	220-240V 1N
ELECTRICAL POWER	3.2 kW
BASKET SIZE	400x400 mm
WASH CYCLES	60/90/120/180 sec
WASH PUMP	400W
WATER CONSUMPTION	1,8 lt

TOTAL WASH PLUS - BPTW40T


Project
Rev.:
Zone:
Location:



CODICE
BND212028

MODELLO
BPTW40T

SERIE
WASHING

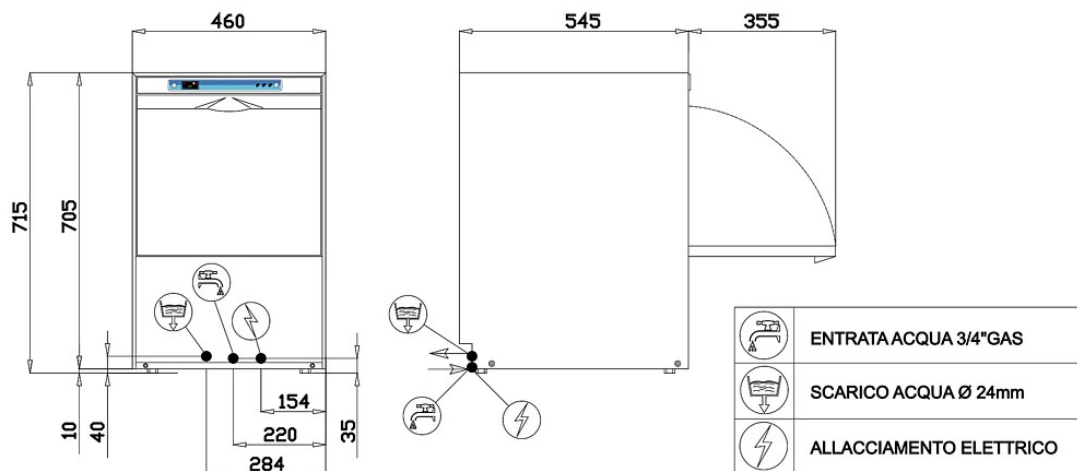

DATI TECNICI	STANDARD			
DIMENSIONI ESTERNE				
larghezza	460 mm			
profondita'	545 mm			
altezza(piedino avvitato)	715 mm			
PESO (versione base)	38 kg			
TENSIONE DI ALIMENTAZIONE	230V 50Hz			
POTENZA MASSIMA ASSORBITA	3200 W			
DUREZZA ACQUA	2-8 °F			
PRESSIONE ACQUA ALIMENTAZIONE	200-400 kPa			
ALTEZZA UTILE & CESTI				
diametro piatti	295 mm			
altezza bicchieri	305 mm			
DIMENSIONE CESTI	400X400 mm			
DOTAZIONE CESTI	2XC121 - 1X10728 - 1X15060			
N° CICLI (sec)	1<60>	2<90>	3<120>	4<180>
ALIMENTAZIONE ACQUA 55°C				
produzione cesti(*) ⁽¹⁾ Cesti/h	60	40	30	20
ALIMENTAZIONE ACQUA 10°C				
produzione cesti(*) ⁽¹⁾ Cesti/h	16	16	16	16
CONSUMO ACQUA PER CICLO (pressione idrica 200kPa)	1.8 L			
CAPACITA' BOILER	3.4 L			
RESISTENZA BOILER	2800 W			
SET. TEMPERATURA RISCIAQUO	85°C			
CAPACITA' VASCA	15.5 L			
RESISTENZA VASCA	1250 W			
SET. TEMPERATURA VASCA	55°C			
POTENZA POMPA	400 W (185 L/min)			
pompa scarico (optional)	25W hMAX scarico 0.8m (40 L/min***)			
RUMOROSITA'	61.2 (dB(A)±0.7)			

(*) CON TERMOSTOP DI SERIE

(**) PORTATA MASSIMA

(¹) In caso di alimentazione con acqua fredda e/o in caso di più lavaggi consecutivi si potrebbero allungare i tempi di riscaldamento dell'acqua del risciacquo finale fino al raggiungimento della temperatura ottimale. Conseguentemente, il tempo totale del ciclo di lavaggio potrebbe aumentare.

N.B. A TERMINE DI LEGGE CI RISERVIAMO LA PROPRIETA' DI QUESTO DISEGNO CON DIVIETO DI RIPRODURLO O DI RENDERLO NOTO A TERZI O A DITTE CONCORRENTI SENZA NOSTRO CONSENSO SCRITTO

PAGINA 1 / 1

PRODUCT'S RANGE PLUS



Printed basket runners



Lightweight composite impellers,
efficient even at low mains pressure



Lightweight composite impellers,
efficient even at low mains pressure

TOTAL WASH PLUS - BPTW40T

Project
Rev.:
Zone:
Location:



CODICE
BND212028

MODELLO
BPTW40T

SERIE
WASHING

ACCESSORIES

CODE	MODELLO	DESCRIZIONE
TWPS	TWPS	DRAIN PUMP
TWDDE	EWDDDE	DETERGENT DISPENSER