

# 80lt ELECTRIC MOTORISED TILTING BRATT PAN - IRON TANK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1018159

MODELLO  
Q90BR/EM81

SERIE  
QUEEN 9

## GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



## TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with 2 mm thickness

Available with iron and stainless steel tanks.

Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss.

Water loading via solenoid valve.

Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

Gas version

Heating by chrome-plated steel burner.

Safety valve with thermocouple, electric ignition.

Manual or motorised lifting.

Electric version

Heating via armoured incoloy heating elements.

Large-radius tilting tank.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

# 80lt ELECTRIC MOTORISED TILTING BRATT PAN - IRON TANK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1018159

MODELLO  
Q90BR/EM81

SERIE  
QUEEN 9

## Technical Information

SPECIFICATION	DATA
MATERIAL	CR1018159
DEFINITION	Q90BR/EM81 BRASIERA EL.M80 MOT.VASCA FE
COMMERCIAL LINE	QUEEN
SUPPLY	ELECTRICS
DIM. WIDTH	800 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	121.8 Kg
VOLUME (net)	0.626
PACKAGE LENGTH	860 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1150 mm
PACKAGE VOLUME	1,010 m3
GROSS PACKING WEIGHT	137 Kg
STANDARD POWER SUPPLY	380-415V 3N
FREQUENCY	50-60 Hz
ELECTRICAL POWER	9 kW
IP GRADE	IPX5
CAPACITY	80
CERTIFIED MODEL	Q90BR/EM81

# 80lt ELECTRIC MOTORISED TILTING BRATT PAN - IRON TANK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....




CODICE  
CR1018159

MODELLO  
Q90BR/EM81

SERIE  
QUEEN 9

## SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION - INSTALLATIESCHEMA - IINSTALLATIONSRTNINGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm  
MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

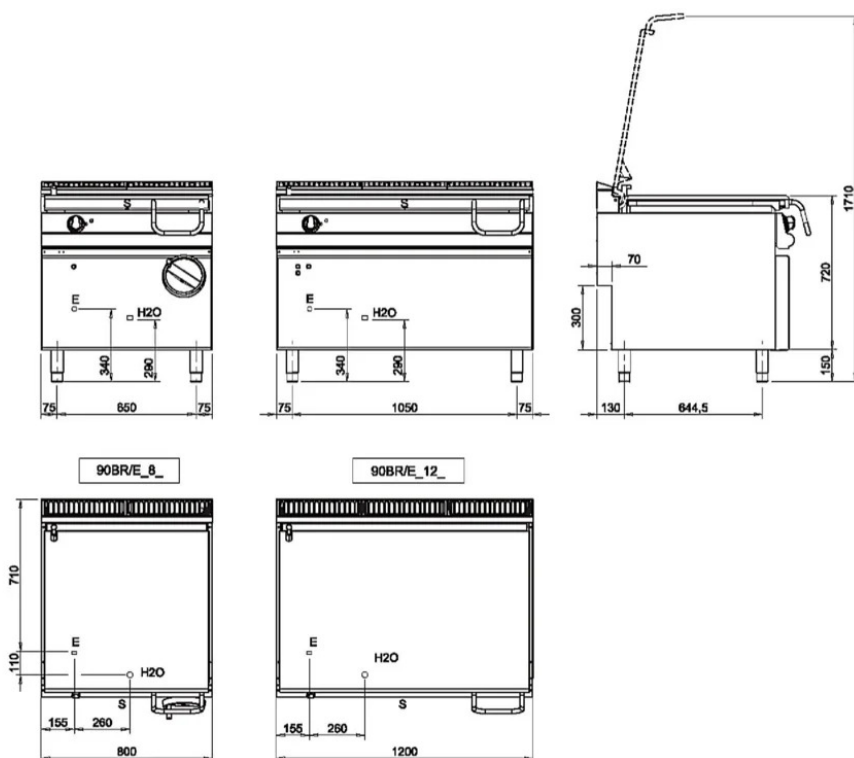

### Legenda - Legende - Key - Légende - Leyenda - Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief  
Presse étoupe de cable él. - Pisacable - Elektrische kabelwartel
- H2O** Attacco arrivo acqua - Wasseranschluss - Water inlet  
Arrivée eau - Union de agua - Wateraansluiting  
**EN ISO 228-1 G 3/4**
- S** Scarico vasca - Wannenabflussrohr - Pan outlet  
Vidange du bac - Descarga cuba - Water toevoer

# 80lt ELECTRIC MOTORISED TILTING BRATT PAN - IRON TANK

Project .....  
Rev.: .....  
Zone: .....  
Location: .....



CODICE  
CR1018159

MODELLO  
Q90BR/EM81

SERIE  
QUEEN 9


## PRODUCT'S RANGE PLUS




Water filling via solenoid valve and fixed tap at the top.



Self-balancing lids.

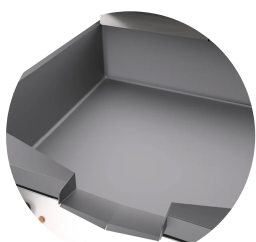

Large-radius tilting tank.

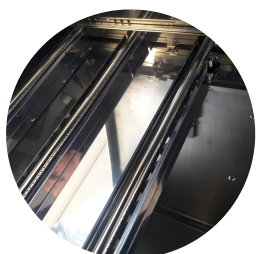

The 8 rows of flame in the M80 model and 12 in the M120 ensure uniformity in cooking. Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.