

120lt MOTORISED TILTING GAS BRATT PAN - IRON TANK

Project
Rev.:
Zone:
Location:



CODICE
CR1018219

MODELLO
Q90BR/GM121

SERIE
QUEEN 9

GENERAL CHARACTERISTICS

It is the choice of those who need maximum strength and power. Queen9 is distinguished by its 900 mm depth, a 20/10-thick work surface, double-crown burners, and the use of elegant stainless steel with a Scotch Brite finish.

Details that not only offer maximum functionality and aesthetics, but also take into account the practical and ergonomic needs of those who work.

The extreme freedom of composition allows top models to be combined with accessorizable oven and neutral base units, even with hygienic finishes.

With more than 350 models immediately available in the catalog, Queen9 is already ready to start giving its best.

In addition, all equipment that makes up a Queen9 kitchen is certified in compliance with international standards, including CE, GAR, AGA and others.



TECHNICAL SPECIFICATIONS

Stainless steel outer shells and feet.

Height of the work surface adjustable from 840 to 900 mm.

Tops with 2 mm thickness

Available with iron and stainless steel tanks.

Robust, double-walled, self-balancing lids made of stainless steel to reduce heat loss.

Water loading via solenoid valve.

Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

Gas version

Heating by chrome-plated steel burner.

Safety valve with thermocouple, electric ignition.

Manual or motorised lifting.

Electric version

Heating via armoured incoloy heating elements.

Large-radius tilting tank.

The 8 flame rows in the M80 model and 12 in the M120 guarantee uniformity in cooking. Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

Equipment certified for low voltage directive 2014/35/EU according to the international CB scheme.

Thanks to the jet-proofing certification (IPX5) obtained through specific tests, knobs and under-knobs can be washed at the end of the working day without compromising functionality and safety.

The front bar is a comfortable foothold for the cook; it keeps a safe distance from the worktop and thus protects against accidental collisions with what is resting on the worktops and at the same time the handles.

120lt MOTORISED TILTING GAS BRATT PAN - IRON TANK

Project
Rev.:
Zone:
Location:



CODICE
CR1018219

MODELLO
Q90BR/GM121

SERIE
QUEEN 9

Technical Information

SPECIFICATION	DATA
MATERIAL	CR1018219
DEFINITION	Q90BR/GM121 BRASIERA GAS M120 MOT.FERRO
COMMERCIAL LINE	QUEEN
SUPPLY	MIXED
DIM. WIDTH	1200 mm
DIM. PRODUCTIVITY	900 mm
DIM. HEIGHT	870 mm
NET WEIGHT	195 Kg
VOLUME (net)	0.94
PACKAGE LENGTH	1240 mm
PACKAGE WIDTH	1020 mm
PACKAGING HEIGHT	1050 mm
PACKAGE VOLUME	1,500 m3
GROSS PACKING WEIGHT	220 Kg
STANDARD POWER SUPPLY	220-240V 1N
FREQUENCY	50 Hz
ELECTRICAL POWER	0.12 kW
GAS POWER	24
GAS POWER (G25.3/25mbar)	20,00
IP GRADE	IPX5
CAPACITY	120
CERTIFIED MODEL	Q90BR/GM121

120lt MOTORISED TILTING GAS BRATT PAN - IRON TANK

Project
 Rev.:
 Zone:
 Location:




CODICE
CR1018219

MODELLO
Q90BR/GM121

SERIE
QUEEN 9

SCHEMA DI INSTALLAZIONE - INSTALLATION DIAGRAM - INSTALLATIONSPLAN - SCHÉMA D'INSTALLATION - ESQUEMA DE INSTALACION -INSTALLATIESCHEMA - IINSTALLATIONSRTITNGAR

MISURE IN mm - DIMENSIONS IN mm - ABMESSUNGEN IN mm
 MESURES EN mm - MEDIDAS EN mm - MATEN IN mm

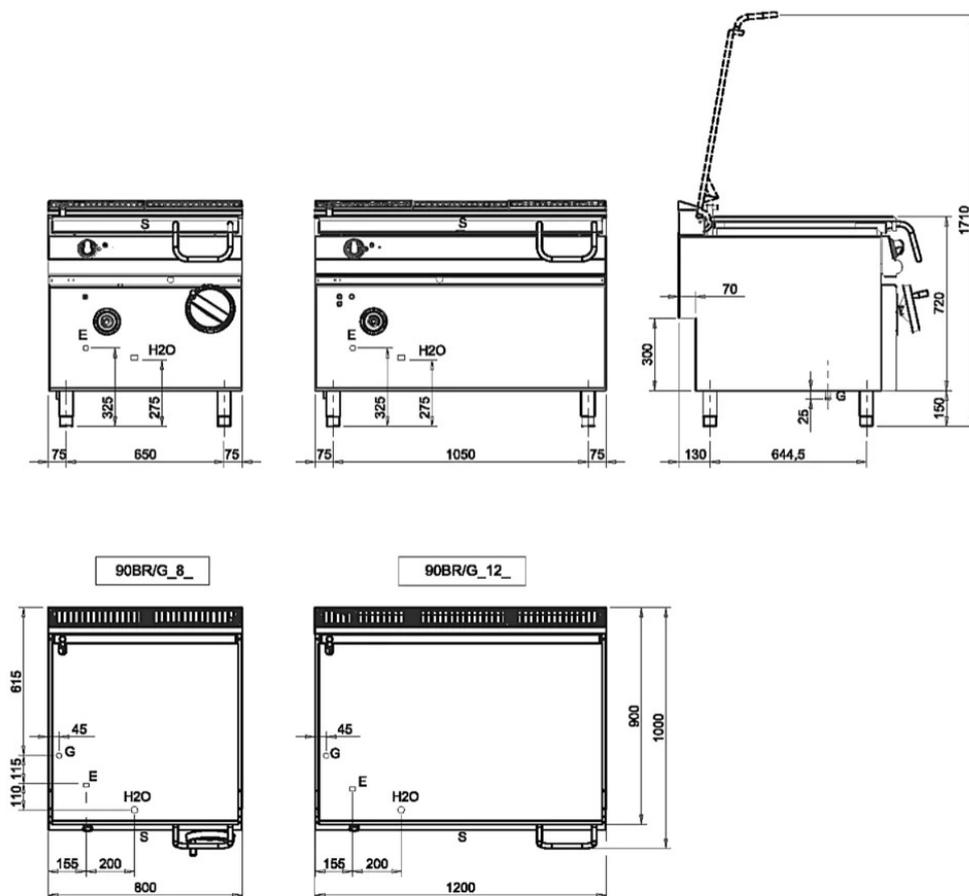

Legenda – Legende – Key – Légende – Leyenda – Legenda

- E** Pressacavo entrata linea elettrica - Stopfbuchse - Electric cable stress relief – Presse étoupe de câble él
Pisacable – Elektrische kabelwartel
- G** Attacco arrivo gas – Gasanschluss – Gas connection - Arrivée gaz – Union de gas – Gasaansluiting
EN 10226-1 R 1/2; EN ISO 228-1 G 1/2 (DK)
- H2O** Attacco arrivo acqua – Wasseranschluss – Water inlet - Arrivée eau – Union de agua – Ater aansluiting
EN ISO 228-1 G 3/4
- S** Scarico vasca – Wannenabflussrohr – Pan outlet - Vidange du bac – Descarga cuba – Water toevoer

120lt MOTORISED TILTING GAS BRATT PAN - IRON TANK

Project
Rev.:
Zone:
Location:



CODICE
CR1018219

MODELLO
Q90BR/GM121

SERIE
QUEEN 9

PRODUCT'S RANGE PLUS



Water filling via solenoid valve and fixed tap at the top.

Self-balancing lids.



Large-radius tilting tank.



The 8 rows of flame in the M80 model and 12 in the M120 ensure uniformity in cooking. Cooking temperature controlled by thermostat with adjustment from 100 to 280°C.

